




SCHEMA CILINDRO IDRAULICO - HYDRAULIC CYLINDER SKETCH



1

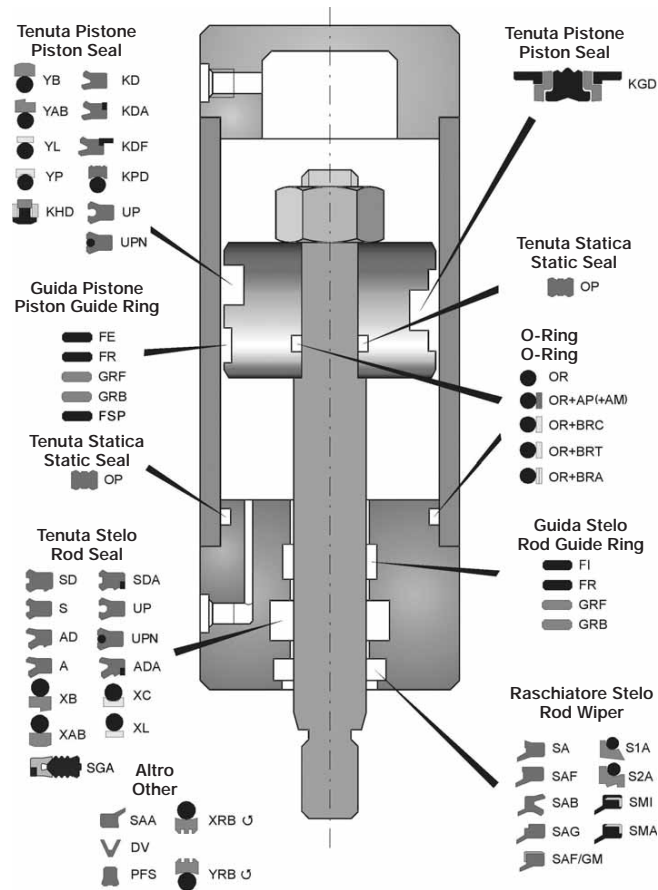












ANELLI RASCHIATORI - WIPERS













Tipo - Type		P (bar)	V (m/s)	T (°C)	Mat.	Pag.
SA		-	0.8	-40 ± +100	TPU	6
SAF		-	0.8	-40 ± +100	TPU	7
SAG		-	0.8	-40 ± +100	TPU	8
SAB		15	0.8	-40 ± +100	TPU	8
SAF/GM		-	0.8	-40 ± +100	TPU + Metal	9
SMI		-	2.0	-30 ± +100	NBR + Metal	9
SMA		-	2.2	-30 ± +100	NBR + Metal	10
SAA		-	0.8	-40 ± +100	TPU	11
S1A		-	15	-30 ± +130 (-50 ± +200)	PTFE + NBR (PTFE + FKM)	11
S2A		-	15	-30 ± +130 (-50 ± +200)	PTFE + NBR (PTFE + FKM)	12

GUARNIZIONI STELO - ROD SEALS

Tipo - Type		P (bar)	V (m/s)	T (°C)	Mat.	Pag.
SD		400	0.5	-40 ÷ +100	TPU	13
SDA		500	0.5	-40 ÷ +100	TPU + POM	15
S		400	0.5	-40 ÷ +100	TPU	16

2


Tipo - Type		P (bar)	V (m/s)	T (°C)	Mat.	Pag.
A		400	0.5	-40 ÷ +100	TPU	16
AD		400	0.5	-40 ÷ +100	TPU	17
SGA		700	0.5	-40 ÷ +110	NBR + POM + TPE	18
XB		600	15	-30 ± +130 (-50 ± +200)	PTFE + NBR (PTFE + FKM)	18
XAB		600	15	-30 ± +130 (-50 ± +200)	PTFE + NBR (PTFE + FKM)	19
XRБ		400	1	-30 ± +130 (-50 ± +200)	PTFE + NBR (PTFE + FKM)	20
XL		160	2	-30 ± +130 (-50 ± +200)	PTFE + NBR (PTFE + FKM)	21
XC		210	4	-30 ± +130 (-50 ± +200)	PTFE + NBR (PTFE + FKM)	22
GUARNIZIONI PISTONE - PISTON SEALS						
Tipo - Type		P (bar)	V (m/s)	T (°C)	Mat.	Pag.
KD		400	0.5	-40 ± +100	TPU	24
KDA		500	0.5	-40 ± +100	TPU + POM	25
KDF		400	0.5	-40 ± +100	TPU + POM	25
SP		-	-	-40 ± +110	POM	26
KPD		400	0.5	-30 ± +100	TPU + NBR	26

Tipo - Type		P (bar)	V (m/s)	T (°C)	Mat.	Pag.
KGD		400	0.5	-40 ± +110	NBR + POM + TPE	27
YB		600	15	-30 ± +130 (-50 ± +200)	PTFE + NBR (PTFE + FKM)	30
YAB		600	15	-30 ± +130 (-50 ± +200)	PTFE + NBR (PTFE + FKM)	31
KHD		500	1.5	-20 ± +120	PTFE + NBR + PA	32
YL		160	2	-30 ± +130 (-50 ± +200)	PTFE + NBR (PTFE + FKM)	33
YP		210	4	-30 ± +130 (-50 ± +200)	PTFE + NBR (PTFE + FKM)	34
YRB		400	1	-30 ± +130 (-50 ± +200)	PTFE + NBR (PTFE + FKM)	35
GUARNIZIONI STELO E PISTONE - ROD AND PISTON SEALS						
Tipo - Type		P (bar)	V (m/s)	T (°C)	Mat.	Pag.
UP		400	0.5	-40 ÷ +100	TPU	36
UPN		400	0.5	-40 ÷ +100	TPU + NBR	39
OP		500	*	-30 ÷ +80	TPU	42
ANELLI DI GUIDA - GUIDE RINGS						
Tipo - Type		P (bar)	V (m/s)	T (°C)	Mat.	Pag.
FI		-	1	-40 ÷ +110	POM	44
FE		-	1	-40 ÷ +110	POM	45

Tipo - Type		P (bar)	V (m/s)	T (°C)	Mat.	Pag.
FR		-	1	-40 ÷ +110	POM	46
GRF		-	1	-40 ÷ +130	Phenolic	47
GRB		-	5	-50 ÷ +200	PTFE	48
MRB		-	5	-50 ÷ +200	PTFE	50
FSP		-	0.8	-40 ÷ +110	POM	51
ALTRI PRODOTTI - OTHER						
Tipo - Type		P (bar)	V (m/s)	T (°C)	Mat.	Pag.
OR		*	*	-30 ÷ +130	NBR	51
AP		*	0.8	-40 ÷ +140	TPE	51
AM		*	0.8	-40 ÷ +140	TPE	57
PFS		500	-	-40 ÷ +100	TPU	58
DV		-	-	-40 ÷ +100	TPU	58

* in funzione delle condizioni d'esercizio - depending on working conditions

SA RASCHIATORE STELLO CON TENUTA STATICA ROD WIPER WITH EXTERNAL LIP

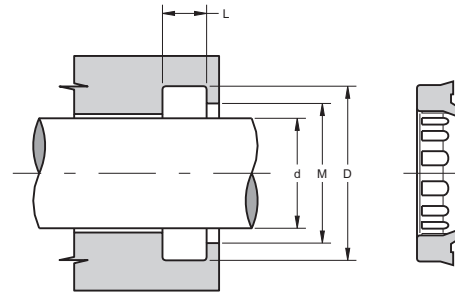

Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.2}	M ^{+0.2}	€uro
SA 4	4	12.0	3.0	9.0	0,37
SA 5/S	5	12.0	2.8	9.0	0,37
SA 6/S	6	12.0	3.0	9.0	0,43
SA 8	8	14.6	3.8	11.0	0,43
SA 9/S	9	13.0	2.5	12.0	0,43
SA 10	10	16.6	3.8	13.8	0,46
SA 10/S	10	15.0	1.0	13.0	0,46
SA 12	12	18.6	3.8	15.0	0,46
SA 13	13	19.6	3.8	16.0	0,50
SA 14	14	20.6	3.8	17.0	0,55
SA 15	15	21.6	3.8	18.0	0,55
SA 16	16	22.6	3.8	19.0	0,55
SA 16/A	16	22.5	3.0	19.0	0,55
SA 17	17	23.6	3.8	20.0	0,55
SA 18	18	24.6	3.8	21.0	0,55
SA 20	20	28.6	5.3	23.0	0,55
SA 20/A	20	26.0	3.4	23.0	0,55
SA 22	22	30.6	5.3	25.0	0,57
SA 22/A2	22	30.6	2.2	25.0	0,57
SA 24	24	32.6	5.3	27.0	0,57
SA 24/A2	24	32.6	2.2	27.0	0,57
SA 25	25	33.6	5.3	28.0	0,57

Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.2}	M ^{+0.2}	€uro
SA 25/H	25	32.5	1.6	27.9	0,57
SA 28	28	36.6	5.3	31.0	0,63
SA 30	30	38.6	5.3	33.0	0,69
SA 30/A2	30	40.0	3.0	34.5	0,69
SA 32	32	40.6	5.3	35.0	0,69
SA 32/H	32	32.5	1.6	34.9	0,69
SA 35	35	43.6	5.3	38.0	0,69
SA 35/A	35	43.6	5.0	38.0	0,69
SA 35/A2	35	45.0	4.0	39.0	0,69
SA 36	36	44.6	5.3	39.0	0,69
SA 38	38	46.6	5.3	41.0	0,78
SA 40	40	48.6	5.3	43.0	0,78
SA 42	42	50.6	5.3	45.0	0,78
SA 45	45	53.6	5.3	48.0	0,78
SA 45/A	45	55.6	5.3	48.0	0,83
SA 45/A2	45	60.0	4.2	53.0	0,89
SA 48	48	56.6	5.3	51.0	0,92
SA 50	50	58.6	5.3	53.0	0,92
SA 50/A	50	60.6	5.3	53.0	0,92
SA 50/A2	50	65.5	4.2	58.0	1,03
SA 55	55	63.6	5.3	58.0	0,98
SA 55/A	55	65.6	5.3	58.0	0,98
SA 56	56	64.6	5.3	59.0	1,01
SA 56/A	56	66.6	5.3	59.0	1,01
SA 60	60	68.6	5.3	63.0	1,01
SA 60/A	60	70.6	5.3	63.0	1,01
SA 60/S	60	70.6	5.5	66.0	1,01
SA 63	63	71.6	5.3	66.0	1,01
SA 63/A	63	73.6	5.3	66.0	1,01
SA 65	65	73.6	5.3	68.0	1,01
SA 65/A	65	75.6	5.3	68.0	1,01
SA 70	70	78.6	5.3	73.0	1,01
SA 70/A	70	82.6	7.1	76.0	1,01
SA 70/B	70	80.6	5.3	73.0	1,01
SA 73/A	73	83.6	7.3	76.0	1,03
SA 75	75	83.6	5.3	78.0	1,03
SA 75/A	75	87.2	7.1	81.0	1,03
SA 78/A	78	90.0	7.5	83.0	1,08
SA 78/S	78	88.6	5.5	84.0	1,08
SA 80	80	88.6	5.3	83.0	1,12




Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.2}	M ^{+0.2}	€uro
SA 80/A	80	92.6	7.1	86.0	1,24
SA 85	85	97.2	7.1	91.0	1,26
SA 85/A	85	93.6	5.3	88.0	1,24
SA 90	90	102.2	7.1	96.0	1,26
SA 90/C	90	98.2	5.3	93.0	1,26
SA 95	95	107.2	7.1	101.0	1,41
SA 99/S	99	109.6	5.5	105.0	1,47
SA 100	100	112.2	7.1	106.0	1,47
SA 105	105	117.2	7.1	111.0	1,47
SA 110	110	122.2	7.1	116.0	1,49
SA 115	115	127.2	7.1	121.0	1,67
SA 115/B	115	123.2	5.3	118.0	1,67
SA 120	120	132.2	7.1	126.0	1,75
SA 120/S	120	130.6	5.5	126.0	1,75
SA 125	125	137.2	7.1	131.0	1,84
SA 130	130	142.2	7.1	136.0	1,98
SA 135	135	147.2	7.1	141.0	2,13
SA 140	140	152.2	7.1	146.0	2,15
SA 141/S	141	151.6	5.5	147.0	2,17
SA 145	145	157.2	7.1	151.0	2,24
SA 150	150	162.2	7.1	156.0	2,61
SA 150/B	150	158.2	5.3	153.0	2,61
SA 160	160	175.2	10.1	168.0	3,53
SA 162/S	162	172.6	5.5	168.0	3,79
SA 170	170	185.2	10.1	178.0	4,57
SA 180	180	195.2	10.1	188.0	5,17
SA 183/S	183	193.6	5.5	189.0	5,38
SA 190	190	205.2	10.1	198.0	5,92
SA 190/A	190	210.0	10.1	200.0	6,00
SA 200	200	215.2	10.1	208.0	6,00
SA 207/S	207	217.6	5.5	213.0	6,22
SA 210	210	225.2	10.1	218.0	6,29
SA 220	220	235.2	10.1	228.0	7,10
SA 230	230	245.2	10.1	238.0	7,47
SA 240	240	255.2	10.1	248.0	7,84
SA 250	250	265.2	10.1	258.0	8,27

Misure in pollici - Inch sizes

SA 1500 1875	38.1	47.6	4.75	42.1	0,78
--------------	------	------	------	------	------


SAF RASCHIATORE STELO LIBERO ROD WIPER

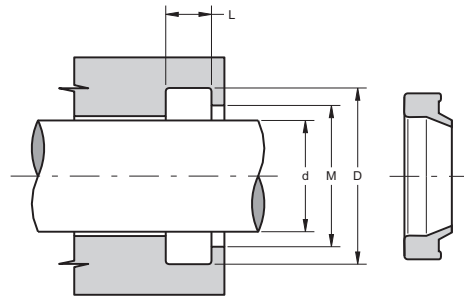

Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.2}	M ^{+0.2}	€uro
SAF 15	15	21.6	3.8	18.0	0,55
SAF 16	16	22.6	3.8	19.0	0,55
SAF 18	18	24.6	3.8	21.0	0,55
SAF 20	20	28.6	5.3	23.0	0,55
SAF 25	25	33.6	5.3	28.0	0,57
SAF 25/S	25	33.6	5.0	28.0	0,57
SAF 28	28	36.6	5.3	31.0	0,63
SAF 28/A	28	33.6	3.2	30.6	0,63
SAF 30	30	38.6	5.3	33.0	0,69
SAF 30/B	30	42.0	3.2	34.4	0,69
SAF 32	32	40.6	5.3	35.0	0,69
SAF 35	35	43.6	5.3	38.0	0,69
SAF 36	36	44.6	5.3	39.0	0,69
SAF 40	40	48.6	5.3	43.0	0,78
SAF 40/A	40	52.0	3.2	45.0	0,78
SAF 42	42	50.6	5.3	45.0	0,78
SAF 50	50	58.6	5.3	53.0	0,92
SAF 60	60	68.6	5.3	63.0	1,01
SAF 63/B	63	73.0	6.3	70.0	1,01
SAF 65	65	73.6	5.3	68.0	1,01
SAF 65/B	65	72.6	2.3	68.0	1,01
SAF 65/C	65	77.0	3.2	70.0	1,01
SAF 200/A	200	215.0	9.5	210.0	6,00
SAF 3000	76.2	88.9	6.3	83.9	1,50
SAF 6500	165.1	190.5	12.7	182.9	9,35
SAF 7000	177.8	203.2	12.7	195.6	9,84

7

SAG RASCHIATORE STELO CON GRADINO ROD WIPER WITH SHOULDER

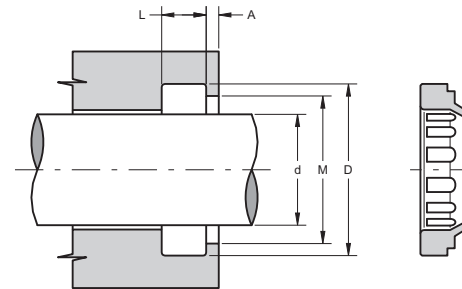


Codice - Part No.	d ^{f7}	D ^{±0.1}	L ^{+0.15}	M ^{H11}	A ^{±0.1}	€uro
SAG 16	16	24	4	22	1	0,49
SAG 20	20	28	4	26	1	0,55
SAG 22	22	30	4	28	1	0,57
SAG 24	24	32	4	30	1	0,57
SAG 25	25	33	4	31	1	0,57
SAG 25/A	25	33.6	5.5	31.4	4	0,57
SAG 28	28	36	4	34	1	0,63
SAG 30	30	38	4	36	1	0,69
SAG 32	32	40	4	38	1	0,69
SAG 35	35	43	4	41	1	0,69
SAG 36	36	44	4	42	1	0,69
SAG 38	38	46	4	44	1	0,73
SAG 40	40	48	4	46	1	0,78
SAG 42	42	50	4	48	1	0,78
SAG 45	45	53	4	51	1	0,78
SAG 50	50	58	4	56	1	0,92
SAG 54	54	62	4	60	1	0,96
SAG 55	55	63	4	61	1	0,98
SAG 56	56	64	4	62	1	0,98
SAG 60	60	68	4	66	1	1,01
SAG 63	63	71	4	69	1	1,01
SAG 65	65	73	4	71	1	1,01
SAG 70	70	78	4	76	1	1,01

8



Codice - Part No.	d ^{f7}	D ^{±0.1}	L ^{+0.15}	M ^{H11}	A ^{±0.1}	€uro
SAG 75	75	83	4	81	1	1,03
SAG 80	80	88	4	86	1	1,12
SAG 85	85	93	4	91	1	1,26
SAG 90	90	98	4	96	1	1,26
SAG 100	100	108	4	106	1	1,38
SAG 100/A	100	108	6	103.5	2	1,38
SAG 110	110	122	5.5	119	1.5	1,50
SAG 120/A	120	132	8.2	125	2.5	1,75
SAG 140/A	140	152	8.2	145	2.5	2,15


SAB RASCHIATORE STELO BIDIREZIONALE ROD BIDIRECTIONAL SCRAPER

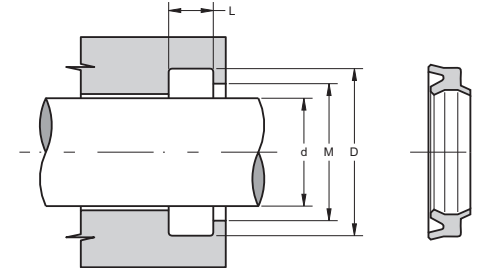

Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.2}	M ^{+0.2}	€uro
SAB 10 20 6	10	20.0	6.5	14.0	1,06
SAB 12	12	18.6	3.8	15.0	1,06
SAB 12 26 6.6	12	26.0	7.0	15.0	1,06
SAB 14/ISO	14	20.0	4.0	16.5	1,12
SAB 18	18	24.6	3.8	21.0	1,12
SAB 20	20	28.6	5.3	23.0	1,24
SAB 22	22	30.6	5.3	25.0	1,32
SAB 22/ISO	22	28.0	4.0	24.5	1,32
SAB 25	25	33.6	5.3	28.0	1,38
SAB 28	28	36.6	5.3	31.0	1,41
SAB 28/ISO	28	36.0	5.0	31.0	1,41
SAB 30	30	38.6	5.3	33.0	1,44
SAB 30/A	30	38.0	5.0	33.0	1,44
SAB 32	32	40.6	5.3	35.0	1,55

Codice - Part No.	d ¹⁷	D ^{H10}	L ^{+0.2}	M ^{+0.2}	€uro
SAB 35	35	43.6	5.3	38.0	1,69
SAB 36	36	44.6	5.3	39.0	1,92
SAB 40	40	48.6	5.3	43.0	1,98
SAB 40/ISO	40	48.0	5.0	43.0	1,98
SAB 42	42	50.6	5.3	45.0	2,00
SAB 45	45	53.6	5.3	48.0	2,01
SAB 50	50	58.6	5.3	53.0	2,04
SAB 55	55	63.6	5.3	58.0	2,18
SAB 55/A	55	65.0	6.0	58.0	2,25
SAB 60	60	68.6	5.3	63.0	2,24
SAB 63	63	71.6	5.3	66.0	2,44
SAB 63/ISO	63	73.0	6.0	66.0	2,44
SAB 65	65	73.6	5.3	68.0	2,47
SAB 70	70	78.6	5.3	73.0	2,50
SAB 75	75	83.6	5.3	78.0	2,50
SAB 80	80	88.6	5.3	83.0	2,53
SAB 85	85	97.2	7.1	91.0	2,61
SAB 90	90	102.2	7.1	96.0	2,67
SAB 100	100	112.2	7.1	106.0	2,99
SAB 110	110	122.2	7.1	116.0	3,53


SAF/GM RASCHIATORE STELO CON INSERTO METALLICO ESTERNO - ROD WIPER WITH EXTERNAL METAL CAGE

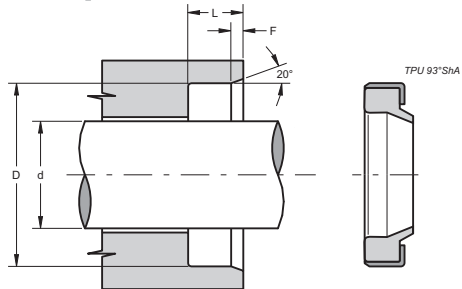

Codice - Part No.	d ¹⁷	D ^{H8}	L ^{+0.2}	F	€uro
SAF 15 23 4.5 /GM	15	23	4.5	0.5	0,97
SAF 16 24 4.5 /GM	16	24	4.5	0.5	0,99

Codice - Part No.	d ¹⁷	D ^{H8}	L ^{+0.2}	F	€uro
SAF 18 26 4.5 /GM	18	26	4.5	0.5	0,99
SAF 20 30 6 /GM	20	30	6.0	0.8	1,02
SAF 25 35 6 /GM	25	35	6.0	0.8	1,09
SAF 28 38 6 /GM	28	38	6.0	0.8	1,12
SAF 30 40 6 /GM	30	40	6.0	0.8	1,19
SAF 32 42 6 /GM	32	42	6.0	0.8	1,23
SAF 35 45 6 /GM	35	45	6.0	0.8	1,23
SAF 36 46 6 /GM	36	46	6.0	0.8	1,23
SAF 40 50 6 /GM	40	50	6.0	0.8	1,29
SAF 42 52 6 /GM	42	52	6.0	0.8	1,31
SAF 50 60 6 /GM	50	60	6.0	0.8	1,40
SAF 60 70 6 /GM	60	70	6.0	0.8	1,56
SAF 65 75 6 /GM	65	75	6.0	0.8	1,77

SMI RASCHIATORE STELO CON INSERTO METALLICO INTERNO - ROD WIPER WITH INTERNAL METAL CAGE

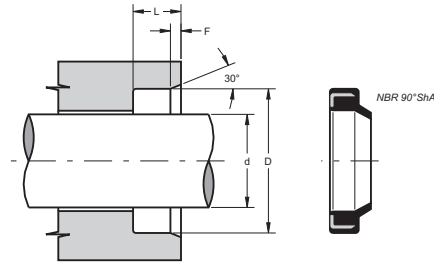


Codice - Part No.	d ¹⁷	D ^{H8}	L ^{+0.2}	F	€uro
SMI 6 13 3.5	6	13	3.5	0.5	1,34
SMI 8 14 3.5	8	14	3.5	0.6	1,34
SMI 10 16 3.5	10	16	3.5	0.6	1,39
SMI 12 18 3.5	12	18	3.5	0.6	1,39
SMI 14 20 3.5	14	20	3.5	0.6	1,51
SMI 15 21 3.5	15	21	3.5	0.6	1,51
SMI 15 25 5	15	25	5.0	1.0	1,51
SMI 16 22 3.5	16	22	3.5	0.5	1,51
SMI 16 26 5	16	26	5.0	1.0	1,51
SMI 18 24 4	18	24	4.0	0.8	1,51

Codice - Part No.	d ¹⁷	D ^{H8}	L ^{+0.2}	F	€uro
SMI 18 28 5	18	28	5.0	1.0	1,53
SMI 20 30 5	20	30	5.0	1.0	1,53
SMI 20 30 7	20	30	7.0	1.5	1,53
SMI 22 32 5	22	32	5.0	1.0	1,67
SMI 22 32 7	22	32	7.0	1.5	1,67
SMI 25 35 5	25	35	5.0	1.0	1,67
SMI 25 35 7	25	35	7.0	1.5	1,67
SMI 26 35 7	26	35	7.0	1.5	1,67
SMI 28 38 5	28	38	5.0	1.0	1,78
SMI 30 40 5	30	40	5.0	1.0	1,78
SMI 30 40 7	30	40	7.0	1.5	1,78
SMI 32 42 5	32	42	5.0	1.0	1,84
SMI 35 45 7	35	45	7.0	1.5	1,84
SMI 36 45 7	36	45	7.0	1.5	1,84
SMI 36 46 5	36	46	5.0	1.0	1,90
SMI 38 48 7	38	48	7.0	1.5	1,95
SMI 40 50 5	40	50	5.0	1.0	1,95
SMI 40 50 7	40	50	7.0	1.5	1,95
SMI 45 55 5	45	55	5.0	1.0	2,06
SMI 45 55 7	45	55	7.0	1.5	2,06
SMI 50 60 5	50	60	5.0	1.0	2,15
SMI 50 60 7	50	60	7.0	1.5	2,15
SMI 55 65 5	55	65	5.0	1.0	2,23
SMI 55 65 7	55	65	7.0	1.5	2,23
SMI 60 70 5	60	70	5.0	1.0	2,43
SMI 60 70 7	60	70	7.0	1.5	2,43
SMI 65 75 5	65	75	5.0	1.0	2,57
SMI 65 75 7	65	75	7.0	1.5	2,57
SMI 70 80 5	70	80	5.0	1.0	3,07
SMI 70 80 7	70	80	7.0	1.5	3,07
SMI 75 83 7	75	83	7.0	1.5	3,35
SMI 75 85 7	75	85	7.0	1.5	3,35
SMI 80 88 7	80	88	7.0	1.5	3,63
SMI 80 90 7	80	90	7.0	1.5	3,63
SMI 85 95 7	85	95	7.0	1.5	3,85
SMI 90 100 7	90	100	7.0	1.5	4,10
SMI 100 110 7	100	110	7.0	1.5	5,13
SMI 100 120 7	100	120	7.0	1.5	5,75
SMI 110 120 7	110	120	7.0	1.5	5,75
SMI 120 130 7	120	130	7.0	1.5	6,69

Codice - Part No.	d ¹⁷	D ^{H8}	L ^{+0.2}	F	€uro
SMA 130 145 9	130	145	9.0	2.0	8,37
SMA 140 155 9	140	155	9.0	2.0	9,15
SMA 150 165 9	150	165	9.0	2.0	11,46
SMA 160 175 9	160	175	9.0	2.0	13,00

SMA RASCHIATORE STELO CON INSERTO METALLICO ESTERNO - ROD WIPER WITH EXTERNAL METAL CAGE

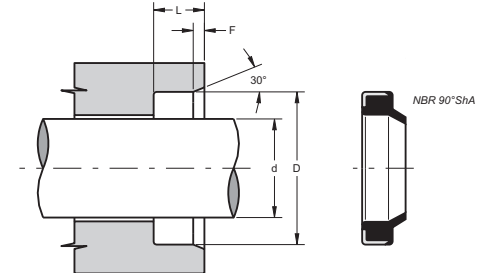


Codice - Part No.	d ¹⁷	D ^{H8}	L ^{+0.2}	F	€uro
SMA 12 20 4	12	20	4	0.8	1,14
SMA 16 22 3	16	22	3	0.5	1,23
SMA 16 26 5	16	26	5	1.0	1,28
SMA 20 28 3	20	28	3	0.6	1,48
SMA 20 30 7	20	30	7	1.5	1,48
SMA 22 28 5	22	28	5	1.0	1,55
SMA 22 32 5	22	32	5	1.0	1,55
SMA 25 35 7	25	35	7	1.5	1,62
SMA 30 40 5	30	40	5	1.0	1,73
SMA 32 45 7	32	45	7	1.5	1,83
SMA 35 45 7	35	45	7	1.5	1,92
SMA 40 50 5	40	50	5	1.0	2,09
SMA 40 50 7	40	50	7	1.5	2,09
SMA 45 55 7	45	55	7	1.5	2,26
SMA 45 60 7	45	60	7	1.5	2,26
SMA 50 60 7	50	60	7	1.5	2,37
SMA 50 65 5	50	65	5	1.0	2,37
SMA 55 65 7	55	65	7	1.0	2,37
SMA 60 70 7	60	70	7	1.5	2,57



Codice - Part No.	d ^{F7}	D ^{H8}	L ^{+0.2}	F	€uro
SMA 65 75 7	65	75	7	1.5	2,96
SMA 70 80 7	70	80	7	1.5	3,04
SMA 75 85 7	75	85	7	1.5	3,35
SMA 80 90 7	80	90	7	1.5	3,74
SMA 90 100 7	90	100	7	1.5	4,07
SMA 95 105 7	95	105	7	1.5	4,43
SMA 100 110 7	100	110	7	1.5	4,63
SMA 110 120 7	110	120	7	1.5	5,38
SMA 120 130 7	120	130	7	1.5	5,91


SAA RASCHIATORE PER ESTERNO EXTERNAL WIPER

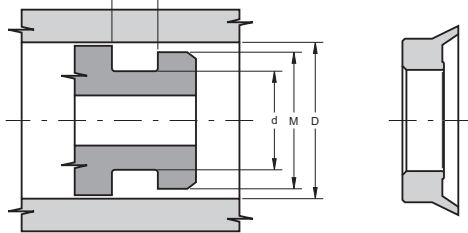

Codice - Part No.	D ^{H10}	d ^{+0.1}	L ^{+0.25}	M	€uro
SAA 30	30	21.4	5.3	27	0,62
SAA 40	40	31.4	5.3	37	0,69
SAA 50	50	41.4	5.3	47	0,78
SAA 60	60	51.4	5.3	57	0,95
SAA 63	63	54.4	5.3	60	1,01
SAA 70	70	61.4	5.3	67	1,03
SAA 80	80	71.4	5.3	77	1,06
SAA 90	90	81.4	5.3	87	1,15
SAA 95	95	86.4	5.3	92	1,26
SAA 100	100	91.4	5.3	97	1,29
SAA 100/B	100	88.0	7.5	94	1,29
SAA 110	110	101.4	5.3	107	1,38
SAA 115/A	115	107.0	5.0	111	1,44
SAA 115/B	115	100.0	10.0	107.5	1,44

Codice - Part No.	D ^{H10}	d ^{+0.1}	L ^{+0.25}	M	€uro
SAA 120	120	111.4	5.3	117	1,49
SAA 130	130	121.4	5.3	127	1,95
SAA 140	140	131.4	5.3	137	1,98

S1A RASCHIATORE STELO - ROD WIPER

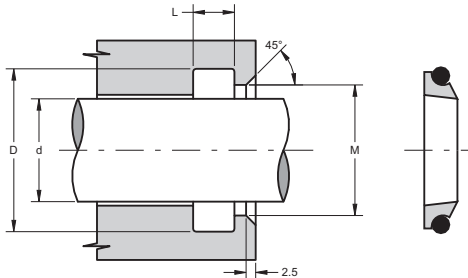

Codice - Part No.	d ^{F8}	D ^{H9}	L ^{+0.2}	M ^{+0.1}	OR	€uro
S1A 8 12.8 3.7	8	12.8	3.7	10.7	012	*
S1A 10 14.8 3.7	10	14.8	3.7	12.7	013	*
S1A 12 18.8 5	12	18.8	5.0	15.5	113	*
S1A 14 20.8 5	14	20.8	5.0	17.5	114	*
S1A 15 21.8 5	15	21.8	5.0	18.5	115	*
S1A 16 22.8 5	16	22.8	5.0	19.5	116	*
S1A 18 24.8 5	18	24.8	5.0	21.5	117	*
S1A 20 26.8 5	20	26.8	5.0	23.5	118	*
S1A 24 30.8 5	24	30.8	5.0	27.5	120	*
S1A 25 31.8 5	25	31.8	5.0	28.5	121	*
S1A 28 34.8 5	28	34.8	5.0	31.5	123	*
S1A 30 36.8 5	30	36.8	5.0	33.5	124	*
S1A 32 38.8 5	32	38.8	5.0	35.5	126	*
S1A 35 41.8 5	35	41.8	5.0	38.5	127	*
S1A 40 46.8 5	40	46.8	5.0	43.5	131	*
S1A 42 48.8 5	42	48.8	5.0	45.5	132	*
S1A 45 51.8 5	45	51.8	5.0	48.5	134	*
S1A 50 56.8 5	50	56.8	5.0	53.5	137	*
S1A 55 61.8 5	55	61.8	5.0	58.5	140	*


* a richiesta - on request

11



Codice - Part No.	d ^{F8}	D ^{H9}	L ^{+0.2}	M ^{+0.1}	OR	€uro
S1A 56 62.8 5	56	62.8	5.0	59.5	141	*
S1A 60 66.8 5	60	66.8	5.0	63.5	143	*
S1A 65 73.8 6	65	73.8	6.0	69.0	231	*
S1A 70 78.8 6	70	78.8	6.0	74.0	233	*
S1A 75 83.8 6	75	83.8	6.0	79.0	234	*
S1A 80 88.8 6	80	88.8	6.0	84.0	236	*
S1A 85 93.8 6	85	93.8	6.0	89.0	237	*
S1A 90 98.8 6	90	98.8	6.0	94.0	239	*
S1A 95 103.8 6	95	103.8	6.0	99.0	241	*
S1A 100 108.8 6	100	108.8	6.0	104.0	242	*
S1A 110 118.8 6	110	118.8	6.0	114.0	245	*
S1A 120 128.8 6	120	128.8	6.0	124.0	249	*
S1A 125 133.8 6	125	133.8	6.0	129.0	250	*
S1A 130 138.8 6	130	138.8	6.0	134.0	252	*
S1A 140 148.8 6	140	148.8	6.0	144.0	255	*
S1A 160 168.8 6	160	168.8	6.0	164.0	260	*
S1A 170 178.8 6	170	178.8	6.0	174.0	261	*
S1A 180 188.8 6	180	188.8	6.0	184.0	263	*
S1A 200 208.8 6	200	208.8	6.0	204.0	266	*

S2A RASCHIATORE STELO - ROD WIPER

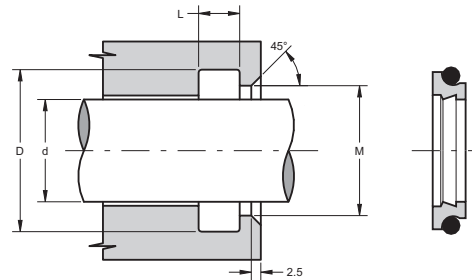


Codice - Part No.	d ^{F8}	D ^{H9}	L ^{+0.2}	M ^{+0.1}	OR	€uro
S2A 8 12.8 3.7	8	12.8	3.7	9.0	012	*
S2A 10 14.8 3.7	10	14.8	3.7	11.0	013	*

* a richiesta - on request

12

Codice - Part No.	d ^{F8}	D ^{H9}	L ^{+0.2}	M ^{+0.1}	OR	€uro
S2A 12 18.8 5	12	18.8	5.0	13.5	113	*
S2A 14 20.8 5	14	20.8	5.0	15.5	114	*
S2A 15 21.8 5	15	21.8	5.0	16.5	115	*
S2A 16 22.8 5	16	22.8	5.0	17.5	116	*
S2A 18 24.8 5	18	24.8	5.0	19.5	117	*
S2A 20 26.8 5	20	26.8	5.0	21.5	118	*
S2A 24 30.8 5	24	30.8	5.0	25.5	120	*
S2A 25 31.8 5	25	31.8	5.0	26.5	121	*
S2A 28 34.8 5	28	34.8	5.0	29.5	123	*
S2A 30 36.8 5	30	36.8	5.0	31.5	124	*
S2A 32 38.8 5	32	38.8	5.0	33.5	126	*
S2A 35 41.8 5	35	41.8	5.0	36.5	127	*
S2A 40 46.8 5	40	46.8	5.0	41.5	131	*
S2A 42 48.8 5	42	48.8	5.0	43.5	132	*
S2A 45 51.8 5	45	51.8	5.0	46.5	134	*
S2A 50 56.8 5	50	56.8	5.0	51.5	137	*
S2A 55 61.8 5	55	61.8	5.0	56.5	140	*
S2A 56 62.8 5	56	62.8	5.0	57.5	141	*
S2A 60 66.8 5	60	66.8	5.0	61.5	143	*
S2A 65 73.8 6	65	73.8	6.0	67.0	231	*
S2A 70 78.8 6	70	78.8	6.0	72.0	233	*
S2A 75 83.8 6	75	83.8	6.0	77.0	234	*
S2A 80 88.8 6	80	88.8	6.0	82.0	236	*
S2A 85 93.8 6	85	93.8	6.0	87.0	237	*
S2A 90 98.8 6	90	98.8	6.0	92.0	239	*
S2A 95 103.8 6	95	103.8	6.0	97.0	241	*
S2A 100 108.8 6	100	108.8	6.0	102.0	242	*
S2A 110 118.8 6	110	118.8	6.0	112.0	245	*
S2A 120 128.8 6	120	128.8	6.0	122.0	249	*
S2A 125 133.8 6	125	133.8	6.0	127.0	250	*
S2A 130 138.8 6	130	138.8	6.0	132.0	252	*
S2A 140 148.8 6	140	148.8	6.0	142.0	255	*
S2A 160 168.8 6	160	168.8	6.0	162.0	260	*
S2A 170 178.8 6	170	178.8	6.0	172.0	261	*
S2A 180 188.8 6	180	188.8	6.0	182.0	263	*
S2A 200 208.8 6	200	208.8	6.0	202.0	266	*

* a richiesta - on request

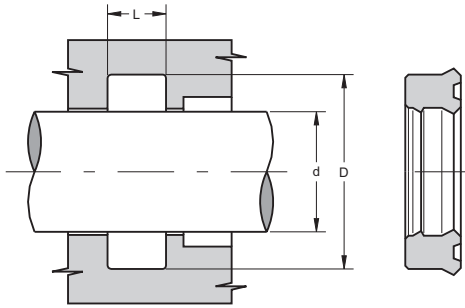
SD TENUTE STELO SEMICOMPATTE CON DOPPIO LABBRIO
 SEMICOMPACT ROD SEALS AND DOUBLE LIP


Codice - Part No.	d ¹⁷	D ^{H10}	L ^{+0,25}	€uro
SD 6 14 5.8	6	14.0	6.3	0,80
SD 8 15 5.8	8	15.0	6.3	0,80
SD 8 16 5.8	8	16.0	6.3	0,86
SD 10 18 5.8	10	18.0	6.3	0,98
SD 12 19 5.6	12	19.0	6.1	1,06
SD 12 19 5.8	12	19.0	6.3	1,06
SD 12 20 5.8	12	20.0	6.3	1,09
SD 12 23 6.5	12	23.0	7.5	1,12
SD 14 20 4.8	14	20.0	5.3	1,01
SD 14 22 5.8	14	22.0	6.3	1,06
SD 15 21.5 4.2	15	21.5	5.0	1,15
SD 15 23 5.8	15	23.0	6.3	1,15
SD 16 24 5.8	16	24.0	6.3	1,15
SD 18 24 4.7	18	24.0	5.5	1,15
SD 18 25 5	18	25.0	5.7	1,27
SD 18 26 5.8	18	26.0	6.3	1,27
SD 18 26 8	18	26.0	9.0	1,27
SD 18 28 5.8	18	28.0	6.3	1,27
SD 18 28 7	18	28.0	8.0	1,27
SD 20 26 5.2	20	26.0	6.0	1,15
SD 20 27 5.8	20	27.0	6.5	1,15
SD 20 28 5.8	20	28.0	6.3	1,27
SD 20 28 7	20	28.0	8.0	1,27

Codice - Part No.	d ¹⁷	D ^{H10}	L ^{+0,25}	€uro
SD 20 30 4.5	20	30.0	5.0	1,33
SD 20 30 7	20	30.0	8.0	1,36
SD 22 30 5.8	22	30.0	6.3	1,36
SD 22 30 7	22	30.0	8.0	1,36
SD 22 32 7	22	32.0	8.0	1,36
SD 22 32 8	22	32.0	9.0	1,39
SD 24 34 5.8	24	34.0	6.5	1,42
SD 25 33 5.8	25	33.0	6.3	1,42
SD 25 33 6.5	25	33.0	7.5	1,42
SD 25 33 8	25	33.0	9.0	1,45
SD 25 35 7	25	35.0	8.0	1,45
SD 25 35 8	25	35.0	9.0	1,45
SD 25 36 5	25	36.0	6.0	1,48
SD 27 37 5.8	27	37.0	6.3	1,48
SD 28 36 5.8	28	36.0	6.3	1,48
SD 28 36 8	28	36.0	9.0	1,48
SD 28 38 7	28	38.0	8.0	1,48
SD 30 38 5.8	30	38.0	6.3	1,48
SD 30 38 7	30	38.0	8.0	1,51
SD 30 40 6.5	30	40.0	7.5	1,54
SD 30 40 7	30	40.0	8.0	1,54
SD 30 40 10	30	40.0	11.0	1,60
SD 32 40 5.8	32	40.0	6.3	1,60
SD 32 40 6.7	32	40.0	7.7	1,60
SD 32 40 8	32	40.0	9.0	1,60
SD 32 42 7	32	42.0	8.0	1,60
SD 32 42 10	32	42.0	11.0	1,60
SD 32 47 10	32	47.0	11.0	1,86
SD 35 43 5.8	35	43.0	6.3	1,77
SD 35 43 6.2	35	43.0	7.0	1,77
SD 35 43 8	35	43.0	9.0	1,83
SD 35 44 7	35	44.0	8.0	1,86
SD 35 45 5.8	35	45.0	6.3	1,86
SD 35 45 7	35	45.0	8.0	1,86
SD 35 45 10	35	45.0	11.0	1,95
SD 35 45 12.5	35	45.0	13.5	1,95
SD 35 50 10	35	50.0	11.0	2,07
SD 36 44 5.8	36	44.0	6.3	1,86
SD 36 44 8	36	44.0	9.0	1,95
SD 36 46 7	36	46.0	8.0	1,86
SD 36 46 10	36	46.0	11.0	1,89




Codice - Part No.	d ¹⁷	D ^{H10}	L ^{+0,25}	€uro
SD 37 47 8	37	47.0	9.0	1,98
SD 37 47 10	37	47.0	11.0	1,98
SD 38 45 6	38	45.0	7.0	1,89
SD 38 50 8.5	38	50.0	9.5	2,04
SD 40 48 5.8	40	48.0	6.3	2,04
SD 40 48 6	40	48.0	7.0	2,04
SD 40 48 8	40	48.0	9.0	2,04
SD 40 50 5.8	40	50.0	6.3	2,04
SD 40 50 7	40	50.0	8.0	2,04
SD 40 50 10	40	50.0	11.0	2,04
SD 40 55 10	40	55.0	11.0	2,10
SD 42 52 8	42	52.0	9.0	2,04
SD 42 53 9	42	53.0	10.0	2,10
SD 45 53 5.8	45	53.0	6.3	2,04
SD 45 53 8	45	53.0	9.0	2,10
SD 45 55 5.8	45	55.0	6.3	2,10
SD 45 55 7	45	55.0	8.0	2,10
SD 45 55 10	45	55.0	11.0	2,10
SD 45 57 9	45	57.0	10.0	2,13
SD 46 54 7.5	46	54.0	8.5	2,10
SD 48 60 6	48	60.0	7.0	2,13
SD 50 58 8	50	58.0	9.0	2,19
SD 50 60 7	50	60.0	8.0	2,19
SD 50 60 9	50	60.0	10.0	2,19
SD 50 60 10	50	60.0	11.0	2,19
SD 50 62 8	50	62.0	9.0	2,22
SD 50 62 10	50	62.0	11.0	2,22
SD 50 65 10	50	65.0	11.0	2,25
SD 50 65 11.5	50	65.0	12.5	2,25
SD 50 70 13.5	50	70.0	14.5	2,39
SD 55 63 8	55	63.0	9.0	2,25
SD 55 65 7	55	65.0	8.0	2,25
SD 55 65 10	55	65.0	11.0	2,25
SD 55 65 12	55	65.0	13.0	2,25
SD 55 70 9.5	55	70.0	10.5	2,25
SD 56 66 6.5	56	66.0	7.5	2,19
SD 56 66 10	56	66.0	11.0	2,25
SD 56 71 9.5	56	71.0	10.5	2,25
SD 56 71 11.5	56	71.0	12.5	2,31
SD 60 68 8	60	68.0	9.0	2,34
SD 60 70 7	60	70.0	8.0	2,34

Codice - Part No.	d ¹⁷	D ^{H10}	L ^{+0,25}	€uro
SD 60 70 10	60	70.0	11.0	2,31
SD 60 70 11.5	60	70.0	12.5	2,34
SD 60 70 12	60	70.0	13.0	2,34
SD 60 72 9	60	72.0	10.0	2,34
SD 60 75 10	60	75.0	11.0	2,39
SD 61 69 7.5	61	69.0	8.5	2,25
SD 63 73 10	63	73.0	11.0	2,36
SD 63 75 8.5	63	75.0	9.5	2,39
SD 63 75 10	63	75.0	11.0	2,39
SD 63 78 11.5	63	78.0	12.5	2,54
SD 65 73 8	65	73.0	9.0	2,36
SD 65 75 12	65	75.0	13.0	2,39
SD 65 77 8.5	65	77.0	9.5	2,54
SD 68 76 8	68	76.0	9.0	2,39
SD 70 78 8	70	78.0	9.0	2,54
SD 70 80 6.5	70	80.0	7.5	2,54
SD 70 80 7	70	80.0	8.0	2,54
SD 70 80 10	70	80.0	11.0	2,54
SD 70 80 12	70	80.0	13.0	2,57
SD 70 82 9	70	82.0	10.0	2,57
SD 70 85 11	70	85.0	12.0	2,66
SD 75 83 8	75	83.0	9.0	2,57
SD 75 85 7	75	85.0	8.0	2,57
SD 75 90 10.5	75	90.0	11.5	2,69
SD 76 84 7.5	76	84.0	8.5	2,57
SD 80 88 11.5	80	88.0	12.5	2,69
SD 80 89 10	80	89.0	11.0	2,69
SD 80 90 7	80	90.0	8.0	2,69
SD 80 90 12	80	90.0	13.0	2,69
SD 80 92 9	80	92.0	9.6	2,69
SD 80 95 11	80	95.0	12.0	2,72
SD 80 96 9.5	80	96.0	10.5	2,72
SD 85 95 7	85	95.0	8.0	2,75
SD 85 95 12	85	95.0	13.0	2,75
SD 85 97 8.5	85	97.0	9.5	2,75
SD 88 96 7.5	88	96.0	8.5	2,75
SD 88.9 101.6 9.5	88.9	101.6	10.5	2,87
SD 90 102 9	90	102.0	10.0	2,87
SD 90 105 11.5	90	105.0	12.5	2,90
SD 91 99 7.5	91	99.0	8.5	2,75
SD 95 103 8	95	103.0	9.0	2,90


Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.25}	€uro
SD 95 104 10	95	104.0	11.0	2,90
SD 95 112 11	95	112.0	12.0	2,93
SD 100 108 7	100	108.0	8.0	3,13
SD 100 108 11.5	100	108.0	12.5	3,13
SD 100 115 11.5	100	115.0	12.5	3,07
SD 107 115 7.5	107	115.0	8.5	3,19
SD 110 119 10	110	119.0	11.0	3,28
SD 110 125 11	110	125.0	12.0	3,58
SD 120 130 7	120	130.0	8.0	3,58
SD 120 130 14	120	130.0	15.0	3,75
SD 120 140 12	120	140.0	13.0	4,20
SD 126 134 7.5	126	134.0	8.5	3,87
SD 130 150 12	130	150.0	13.0	4,94
SD 140 155 8	140	155.0	9.0	5,03
SD 140 160 11.5	140	160.0	12.5	5,26
SD 145 153 7.5	145	153.0	8.5	4,88
SD 150 170 12	150	170.0	13.0	6,39
SD 180 200 12	180	200.0	13.0	9,43
SD 190 210 12	190	210.0	13.0	10,44
SD 210 230 15	210	230.0	16.0	12,74

Misure in pollici - Inch sizes


SD 4000 4500 0375	101.6	114.3	10.5	3,07
-------------------	-------	-------	------	------

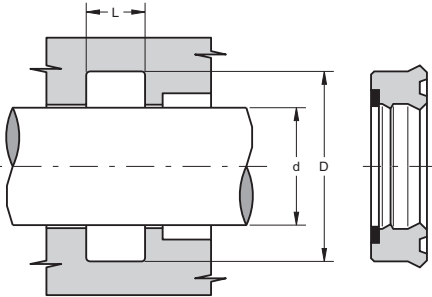SDA CON DOPIPIO LABBRIO DI TENUTA E ANELLO ANTIESTRUSIONE
 DOUBLE LIP AND ANTI-EXTRUSION RING


Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.25}	€uro
SDA 40 48 8	40	48.0	9.0	2,57
SDA 40 50 10	40	50.0	11.0	2,57
SDA 40 55 10	40	55.0	11.0	2,69
SDA 45 53 9.5	45	53.0	10.5	2,69
SDA 45 55 10	45	55.0	11.0	2,69
SDA 45 60 10	45	60.0	11.0	2,75
SDA 50 60 10	50	60.0	11.0	2,75
SDA 50 65 10	50	65.0	11.0	2,78
SDA 55 65 10	55	65.0	11.0	2,84
SDA 56 71 11.5	56	71.0	12.5	2,90
SDA 60 70 12.5	60	70.0	13.5	2,96
SDA 60 75 12	60	75.0	13.0	3,04
SDA 60 80 12	60	80.0	13.0	3,19
SDA 65 80 11.5	65	80.0	12.5	3,28
SDA 70 85 12	70	85.0	13.0	3,31
SDA 70 90 13.5	70	90.0	14.5	3,46
SDA 75 90 12	75	90.0	13.0	3,43
SDA 75 95 13.5	75	95.0	14.5	3,49
SDA 80 88 9	80	88.0	10.0	3,37
SDA 80 95 11	80	95.0	12.0	3,46
SDA 80 100 11.5	80	100.0	12.5	3,52
SDA 80 100 13.5	80	100.0	14.5	3,52
SDA 90 105 8.5	90	105.0	9.5	3,58
SDA 90 105 12	90	105.0	13.0	3,58
SDA 90 110 12	90	110.0	13.0	3,64
SDA 95 115 13.5	95	115.0	14.5	3,87
SDA 100 110 12.5	100	110.0	13.5	3,78
SDA 100 113 12.5	100	113.0	13.5	3,81
SDA 100 120 13.5	100	120.0	14.5	4,20
SDA 110 120 13.5	110	120.0	14.5	4,20
SDA 110 125 12	110	125.0	13.0	3,72
SDA 110 130 11.5	110	130.0	12.5	4,49
SDA 120 135 11.5	120	135.0	12.5	4,67
SDA 120 140 11.5	120	140.0	12.5	4,79
SDA 120 140 15	120	140.0	16.0	5,64
SDA 130 145 12	130	145.0	13.0	5,62
SDA 140 155 12	140	155.0	13.0	5,85

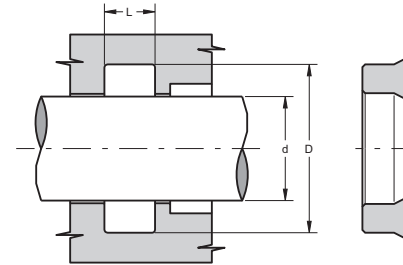S TENUTE STELO SEMICOMPATTE
 SEMICOMPACT ROD SEALS


Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.25}	€uro
S 12 18 4.5	12	18.0	5.0	0,95
S 14 19 4.8	14	19.0	5.3	1,01
S 16 22 4	16	22.0	4.5	1,06
S 20 25 3.7	20	25.0	4.5	1,15
S 22 28 4.5	22	28.0	5.5	1,27
S 22 30 5.8	22	30.0	6.3	1,36
S 22 32 8	22	32.0	9.0	1,42
S 25 32 4	25	32.0	5.0	1,39
S 25 33 5.8	25	33.0	6.3	1,42
S 56 66 6.5	56	66.0	7.5	2,19
S 3375 4375 0550	85.7	111.1	15.0	4,62

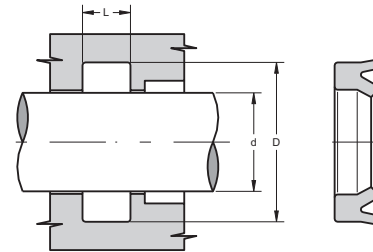A TENUTA STELO A LABBRI ASIMMETRICI
 ROD SEAL WITH ASYMMETRIC LIPS


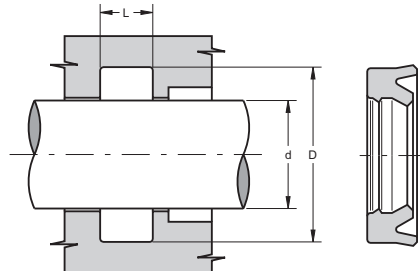
Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.25}	€uro
A 6 11 4	6	11.0	4.5	0,77
A 6 11 5.5	6	11.0	6.0	0,77
A 10 20 7	10	20.0	8.0	1,03
A 11 17 4.5	11	17.0	5.0	0,95
A 12 17 3.5	12	17.0	4.0	0,95
A 12 20 5.8	12	20.0	6.3	1,09
A 12 22 7	12	22.0	8.0	1,06
A 14 22 5.8	14	22.0	6.3	1,06
A 15 23 5.8	15	23.0	6.3	1,15
A 16 20.6 3.3	16	20.6	3.6	1,06
A 16 22 5	16	22.0	5.5	1,06
A 16 24 5.8	16	24.0	6.3	1,15
A 18 24 4.7	18	24.0	5.2	1,15
A 18 26 5.8	18	26.0	6.3	1,27
A 20 26 5	20	26.0	5.5	1,15
A 20 28 5.8	20	28.0	6.3	1,27
A 20 28 6	20	28.0	7.0	1,27
A 20 28 7	20	28.0	8.0	1,27
A 22 30 5.8	22	30.0	6.3	1,36
A 22 32 7	22	32.0	8.0	1,36
A 24 34 7	24	34.0	8.0	1,45
A 25 33 5.8	25	33.0	6.3	1,42
A 25 33 6.3	25	33.0	7.0	1,42
A 25 35 7	25	35.0	8.0	1,45
A 27 35 5.8	27	35.5	6.3	1,48
A 28 40 8.5	28	40.0	9.5	1,54
A 30 38 5.8	30	38.0	6.3	1,48
A 30 38 8	30	38.0	9.0	1,51
A 30 40 7	30	40.0	8.0	1,54
A 30 40 9.5	30	40.0	10.5	1,60
A 32 40 5.8	32	40.0	6.3	1,60
A 32 40 8	32	40.0	9.0	1,60
A 32 42 7	32	42.0	8.0	1,60
A 33 43 10	33	43.0	11.0	1,77
A 35 43 5.8	35	43.0	6.3	1,77
A 35 43 8	35	43.0	9.0	1,83
A 35 45 7	35	45.0	8.0	1,86
A 35 46 8	35	46.0	9.0	1,95
A 36 46 7	36	46.0	8.0	1,86
A 36 48 11	36	48.0	12.0	2,05



Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.25}	€uro
A 38 44.5 4.7	38	44.5	5.3	1,86
A 38 45 5	38	45.0	5.5	1,86
A 40 48 4	40	48.0	4.5	2,04
A 40 48 5.8	40	48.0	6.3	2,04
A 40 48 8	40	48.0	9.0	2,04
A 40 50 7	40	50.0	8.0	2,04
A 40 50 10	40	50.0	11.0	2,04
A 40 52 8	40	52.0	9.0	2,07
A 40 60 10	40	60.0	11.0	2,22
A 45 55 7	45	55.0	8.0	2,10
A 45 55 10	45	55.0	11.0	2,10
A 45 58 9	45	58.0	10.0	2,13
A 50 60 7	50	60.0	8.0	2,19
A 50 60 10	50	60.0	11.0	2,19
A 50 65 11.5	50	65.0	12.5	2,25
A 50 68 9	50	68.0	10.0	2,25
A 55 65 7	55	65.0	8.0	2,25
A 55 65 10	55	65.0	11.0	2,25
A 55 65 12	55	65.0	13.0	2,25
A 55 70 9.5	55	70.0	10.5	2,25
A 60 65.6 5.6	60	65.6	6.3	2,25
A 60 70 7	60	70.0	8.0	2,34
A 60 72 8	60	72.0	9.0	2,39
A 60 75 10	60	75.0	11.0	2,39
A 60 75 12	60	75.0	13.0	2,45
A 65 80 10	65	80.0	11.0	2,57
A 70 80 7	70	80.0	8.0	2,54
A 70 80 10	70	80.0	11.0	2,54
A 70 85 10	70	85.0	11.0	2,66
A 70 85 11	70	85.0	12.0	2,66
A 75 90 10	75	90.0	11.0	2,69
A 80 90 7	80	90.0	8.0	2,69
A 80 90 12	80	90.0	13.0	2,69
A 80 95 10	80	95.0	11.0	2,72
A 85 100 12	85	100.0	13.0	2,78
A 90 100 12	90	100.0	13.0	2,84
A 90 110 12	90	110.0	13.0	3,04
A 95 105 5	95	105.0	5.7	3,29
A 100 109.3 5.7	100	109.3	6.2	2,96
A 100 115 10.5	100	115.0	11.5	3,07
A 100 115 12	100	115.0	13.0	3,13

Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.25}	€uro
A 100 120 15	100	120.0	16.0	3,40
A 105 115 5.7	105	115.0	6.2	2,90
A 110 130 12	110	130.0	13.0	3,64
A 115 130 11	115	130.0	12.0	3,81
A 130 145 14	130	145.0	15.0	4,32
A 140 150 11.5	140	150.0	12.5	4,88
A 7000 8000 0765	177.8	203.2	20.4	13,56

AD TENUTA STELO A LABBRI ASIMMETRICI
E DOPPIO LABBRO
ROD SEAL WITH ASYMMETRIC LIPS AND DOUBLE LIP



Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.25}	€uro
AD 12 22 8	12	22.0	9.0	1,06
AD 20 26 5	20	26.0	6.0	1,15
AD 30 42 11	30	42.0	12.0	1,61
AD 32 40 6.5	32	40.0	7.5	1,54
AD 35 43 7	35	43.0	8.0	1,77
AD 40 52 11	40	52.0	12.0	2,71
AD 55 65 8.5	55	65.0	9.5	2,25
AD 55 65 10	55	65.0	11.0	2,25
AD 60 69.3 5.5	60	69.3	6.2	2,34
AD 60 70 14	60	70.0	15.0	2,36
AD 75 85 11.5	75	85.0	12.5	2,66
AD 78 88 14	78	88.0	15.0	2,78
AD 85 93 10	85	93.0	11.0	2,75
AD 88.9 101.6 9.5	88.9	101.6	10.5	2,87
AD 90 100 11.5	90	100.0	12.5	2,87
AD 90 105 11.5	90	105.0	12.5	2,90


17

Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.25}	€uro
AD 99 109 14	99	109.0	15.0	3,13
AD 100 110 11.5	100	110.0	12.5	3,13
AD 105 115 11.5	105	115.0	12.5	3,13
AD 110 120 10.5	110	120.0	11.5	3,37
AD 115 125 12	115	125.0	13.0	3,72
AD 120 130 14	120	130.0	15.0	3,75
AD 141 151 14	141	151.0	15.0	4,88
AD 155 163 11.5	155	163.0	12.5	5,65
AD 162 172 14	162	172.0	15.0	6,36
AD 183 193 14	183	193.0	15.0	9,42
AD 207 217 14	207	217.0	15.0	12,18

Misure in pollici - Inch sizes

AD 1250 1750 0250	31.75	44.45	7.0	1,83
AD 1500 2000 0335	38.1	50.8	9.5	2,04

SGA TENUTA STELO A SEMPLICE EFFETTO
SINGLE ACTING ROD SEAL

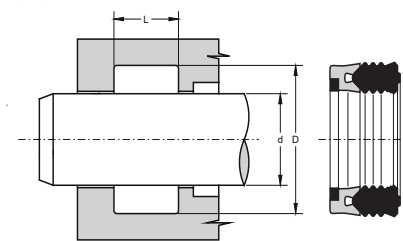


Codice - Part No.	d ^{f7}	D ^{H10}	L ^{+0.25}	€uro
SGA 30 43	30	43.0	20.0	5,73
SGA 45 60	45	60.0	22.5	6,90
SGA 60 77	60	77.0	27.0	8,31
SGA 70 90	70	90.0	30.0	9,41
SGA 95 115	95	115.0	28.0	12,83
SGA 110 130	110	130.0	32.5	15,45

18



XB TENUTA STELO A SEMPLICE EFFETTO
SINGLE ACTING ROD SEAL

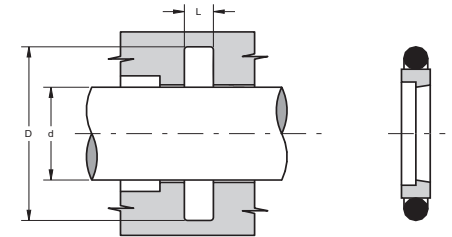

Codice - Part No.	d ^{H9}	D ^{H10}	L ^{+0.2}	OR	€uro
XB 4 8.9 2.2	4	8.9	2.2	010	*
XB 5 9.9 2.2	5	9.9	2.2	010	*
XB 7 11.9 2.2	7	11.9	2.2	012	*
XB 8 15.3 3.2	8	15.3	3.2	111	*
XB 10 17.3 3.2	10	17.3	3.2	112	*
XB 12 19.3 3.2	12	19.3	3.2	114	*
XB 14 21.3 3.2	14	21.3	3.2	115	*
XB 15 22.3 3.2	15	22.3	3.2	116	*
XB 16 23.3 3.2	16	23.3	3.2	116	*
XB 17 24.3 3.2	17	24.3	3.2	117	*
XB 18 25.3 3.2	18	25.3	3.2	117	*
XB 20 30.7 4.2	20	30.7	4.2	214	*
XB 22 32.7 4.2	22	32.7	4.2	215	*
XB 24 34.7 4.2	24	34.7	4.2	216	*
XB 25 35.7 4.2	25	35.7	4.2	217	*
XB 26 36.7 4.2	26	36.7	4.2	218	*
XB 28 38.7 4.2	28	38.7	4.2	219	*
XB 30 40.7 4.2	30	40.7	4.2	220	*
XB 32 42.7 4.2	32	42.7	4.2	221	*
XB 35 45.7 4.2	35	45.7	4.2	222	*
XB 36 46.7 4.2	36	46.7	4.2	223	*
XB 37 47.7 4.2	37	47.7	4.2	223	*
XB 38 53.1 6.3	38	53.1	6.3	327	*
XB 40 55.1 6.3	40	55.1	6.3	328	*
XB 42 57.1 6.3	42	57.1	6.3	328	*
XB 45 60.1 6.3	45	60.1	6.3	329	*
XB 48 63.1 6.3	48	63.1	6.3	330	*
XB 50 65.1 6.3	50	65.1	6.3	331	*

* a richiesta - on request




Codice - Part No.	d ^{H9}	D ^{H10}	L ^{+0.2}	OR	€uro
XB 52 67.1 6.3	52	67.1	6.3	331	*
XB 55 70.1 6.3	55	70.1	6.3	332	*
XB 58 73.1 6.3	58	73.1	6.3	333	*
XB 60 75.1 6.3	60	75.1	6.3	334	*
XB 65 80.1 6.3	65	80.1	6.3	335	*
XB 70 85.1 6.3	70	85.1	6.3	337	*
XB 75 90.1 6.3	75	90.1	6.3	339	*
XB 80 95.1 6.3	80	95.1	6.3	340	*
XB 85 100.1 6.3	85	100.1	6.3	342	*
XB 90 105.1 6.3	90	105.1	6.3	343	*
XB 95 110.1 6.3	95	110.1	6.3	345	*
XB 100 115.1 6.3	100	115.1	6.3	346	*
XB 110 125.1 6.3	110	125.1	6.3	350	*
XB 120 135.1 6.3	120	135.1	6.3	353	*
XB 125 140.1 6.3	125	140.1	6.3	354	*
XB 130 145.1 6.3	130	145.1	6.3	356	*
XB 140 155.1 6.3	140	155.1	6.3	359	*
XB 150 165.1 6.3	150	165.1	6.3	361	*
XB 155 170.1 6.3	155	160.1	6.3	362	*
XB 160 175.1 6.3	160	175.1	6.3	363	*
XB 170 185.1 6.3	170	185.1	6.3	365	*
XB 175 190.1 6.3	175	190.1	6.3	366	*
XB 180 195.1 6.3	180	195.1	6.3	366	*
XB 185 200.1 6.3	185	200.1	6.3	367	*
XB 190 205.1 6.3	190	205.1	6.3	368	*
XB 195 210.1 6.3	195	210.1	6.3	368	*
XB 200 220.5 8.1	200	220.5	8.1	674	*
XB 210 230.5 8.1	210	230.5	8.1	446	*
XB 220 240.5 8.1	220	240.5	8.1	447	*
XB 225 245.5 8.1	225	245.5	8.1	447	*
XB 230 250.5 8.1	230	250.5	8.1	448	*
XB 240 260.5 8.1	240	260.5	8.1	448	*
XB 250 270.5 8.1	250	270.5	8.1	449	*
XB 260 284.0 8.1	260	284.0	8.1	450	*
XB 270 294.0 8.1	270	294.0	8.1	451	*
XB 280 304.0 8.1	280	304.0	8.1	452	*
XB 290 314.0 8.1	290	314.0	8.1	453	*
XB 300 324.0 8.1	300	324.0	8.1	454	*
XB 310 334.0 8.1	310	334.0	8.1	454	*
XB 320 344.0 8.1	320	344.0	8.1	455	*
XB 330 354.0 8.1	330	354.0	8.1	456	*
XB 340 364.0 8.1	340	364.0	8.1	457	*
XB 350 374.0 8.1	350	374.0	8.1	458	*

* a richiesta - on request

Codice - Part No.	d ^{H9}	D ^{H10}	L ^{+0.2}	OR	€uro
XB 360 384.0 8.1	360	384.0	8.1	458	*
XB 370 394.0 8.1	370	394.0	8.1	459	*
XB 380 404.0 8.1	380	404.0	8.1	460	*
XB 390 414.0 8.1	390	414.0	8.1	461	*
XB 400 424.0 8.1	400	424.0	8.1	461	*
XB 420 444.0 8.1	420	444.0	8.1	463	*
XB 440 464.0 8.1	440	464.0	8.1	464	*
XB 450 474.0 8.1	450	474.0	8.1	465	*
XB 460 484.0 8.1	460	484.0	8.1	466	*
XB 480 504.0 8.1	480	504.0	8.1	468	*
XB 500 524.0 8.1	500	524.0	8.1	469	*

XAB TENUTA STELO A DOPPIO EFFETTO DOUBLE ACTING ROD SEAL

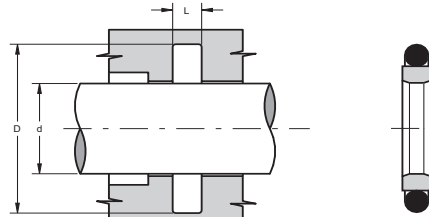

Codice - Part No.	d ^{H9}	D ^{H10}	L ^{+0.2}	OR	€uro
XAB 4 8.9 2.2	4	8.9	2.2	010	*
XAB 5 9.9 2.2	5	9.9	2.2	010	*
XAB 7 11.9 2.2	7	11.9	2.2	012	*
XAB 8 15.3 3.2	8	15.3	3.2	111	*
XAB 10 17.3 3.2	10	17.3	3.2	112	*
XAB 12 19.3 3.2	12	19.3	3.2	114	*
XAB 14 21.3 3.2	14	21.3	3.2	115	*
XAB 15 22.3 3.2	15	22.3	3.2	116	*
XAB 16 23.3 3.2	16	23.3	3.2	116	*
XAB 17 24.3 3.2	17	24.3	3.2	117	*
XAB 18 25.3 3.2	18	25.3	3.2	117	*
XAB 20 30.7 4.2	20	30.7	4.2	214	*
XAB 22 32.7 4.2	22	32.7	4.2	215	*
XAB 24 34.7 4.2	24	34.7	4.2	216	*
XAB 25 35.7 4.2	25	35.7	4.2	217	*
XAB 26 36.7 4.2	26	36.7	4.2	218	*

* a richiesta - on request

19




Codice - Part No.	d ^{H9}	D ^{H10}	L ^{+0.2}	OR	€uro
XAB 28 38.7 4.2	28	38.7	4.2	219	*
XAB 30 40.7 4.2	30	40.7	4.2	220	*
XAB 32 42.7 4.2	32	42.7	4.2	221	*
XAB 35 45.7 4.2	35	45.7	4.2	222	*
XAB 36 46.7 4.2	36	46.7	4.2	223	*
XAB 37 47.7 4.2	37	47.7	4.2	223	*
XAB 38 53.1 6.3	38	53.1	6.3	327	*
XAB 40 55.1 6.3	40	55.1	6.3	328	*
XAB 42 57.1 6.3	42	57.1	6.3	328	*
XAB 45 60.1 6.3	45	60.1	6.3	329	*
XAB 48 63.1 6.3	48	63.1	6.3	330	*
XAB 50 65.1 6.3	50	65.1	6.3	331	*
XAB 52 67.1 6.3	52	67.1	6.3	331	*
XAB 55 70.1 6.3	55	70.1	6.3	332	*
XAB 58 73.1 6.3	58	73.1	6.3	333	*
XAB 60 75.1 6.3	60	75.1	6.3	334	*
XAB 65 80.1 6.3	65	80.1	6.3	335	*
XAB 70 85.1 6.3	70	85.1	6.3	337	*
XAB 75 90.1 6.3	75	90.1	6.3	339	*
XAB 80 95.1 6.3	80	95.1	6.3	340	*
XAB 85 100.1 6.3	85	100.1	6.3	342	*
XAB 90 105.1 6.3	90	105.1	6.3	343	*
XAB 95 110.1 6.3	95	110.1	6.3	345	*
XAB 100 115.1 6.3	100	115.1	6.3	346	*
XAB 110 125.1 6.3	110	125.1	6.3	350	*
XAB 120 135.1 6.3	120	135.1	6.3	353	*
XAB 125 140.1 6.3	125	140.1	6.3	354	*
XAB 130 145.1 6.3	130	145.1	6.3	356	*
XAB 140 155.1 6.3	140	155.1	6.3	359	*
XAB 150 165.1 6.3	150	165.1	6.3	361	*
XAB 155 170.1 6.3	155	170.1	6.3	362	*
XAB 160 175.1 6.3	160	175.1	6.3	363	*
XAB 170 185.1 6.3	170	185.1	6.3	365	*
XAB 175 190.1 6.3	175	190.1	6.3	366	*
XAB 180 195.1 6.3	180	195.1	6.3	366	*
XAB 185 200.1 6.3	185	200.1	6.3	367	*
XAB 190 205.1 6.3	190	205.1	6.3	368	*
XAB 195 210.1 6.3	195	210.1	6.3	368	*
XAB 200 220.5 8.1	200	220.5	8.1	674	*
XAB 210 230.5 8.1	210	230.5	8.1	446	*
XAB 220 240.5 8.1	220	240.5	8.1	447	*
XAB 225 245.5 8.1	225	245.5	8.1	447	*
XAB 230 250.5 8.1	230	250.5	8.1	448	*

* a richiesta - on request

20

Codice - Part No.	d ^{H9}	D ^{H10}	L ^{+0.2}	OR	€uro
XAB 240 260.5 8.1	240	260.5	8.1	448	*
XAB 250 270.5 8.1	250	270.5	8.1	449	*
XAB 260 284.0 8.1	260	284.0	8.1	450	*
XAB 270 294.0 8.1	270	294.0	8.1	451	*
XAB 280 304.0 8.1	280	304.0	8.1	452	*
XAB 290 314.0 8.1	290	314.0	8.1	453	*
XAB 300 324.0 8.1	300	324.0	8.1	454	*
XAB 310 334.0 8.1	310	334.0	8.1	454	*
XAB 320 344.0 8.1	320	344.0	8.1	455	*
XAB 330 354.0 8.1	330	354.0	8.1	456	*
XAB 340 364.0 8.1	340	364.0	8.1	457	*
XAB 350 374.0 8.1	350	374.0	8.1	458	*
XAB 360 384.0 8.1	360	384.0	8.1	458	*
XAB 370 394.0 8.1	370	394.0	8.1	459	*
XAB 380 404.0 8.1	380	404.0	8.1	460	*
XAB 390 414.0 8.1	390	414.0	8.1	461	*
XAB 400 424.0 8.1	400	424.0	8.1	461	*
XAB 420 444.0 8.1	420	444.0	8.1	463	*
XAB 440 464.0 8.1	440	464.0	8.1	464	*
XAB 450 474.0 8.1	450	474.0	8.1	465	*
XAB 460 484.0 8.1	460	484.0	8.1	466	*
XAB 480 504.0 8.1	480	504.0	8.1	468	*
XAB 500 524.0 8.1	500	524.0	8.1	469	*

XRB TENUTA INTERNA PER ORGANI ROTANTI DOUBLE ACTING SEAL FOR ROTATING ROD

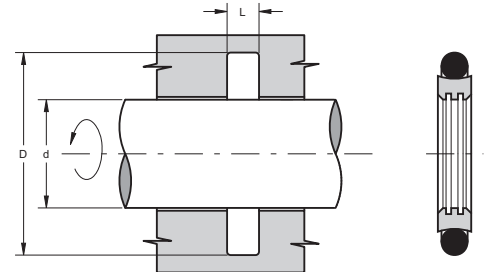

Codice - Part No.	d ^{H9}	D ^{H10}	L ^{+0.2}	OR	€uro
XRB 6 10.9 2.2	6	10.9	2.2	011	*
XRB 8 12.9 2.2	8	12.9	2.2	012	*

* a richiesta - on request




Codice - Part No.	d ¹⁸	D ^{H9}	L ^{+0.2}	OR	€uro
XRБ 10 14.9 2.2	10	14.9	2.2	013	*
XRБ 12 16.9 2.2	12	16.9	2.2	015	*
XRБ 14 18.9 2.2	14	18.9	2.2	016	*
XRБ 15 19.9 2.2	15	19.9	2.2	017	*
XRБ 16 20.9 2.2	16	20.9	2.2	017	*
XRБ 18 22.9 2.2	18	22.9	2.2	019	*
XRБ 20 27.5 3.2	20	27.5	3.2	119	*
XRБ 22 29.5 3.2	22	29.5	3.2	120	*
XRБ 25 32.5 3.2	25	32.5	3.2	122	*
XRБ 28 35.5 3.2	28	35.5	3.2	124	*
XRБ 30 37.5 3.2	30	37.5	3.2	125	*
XRБ 32 39.5 3.2	32	39.5	3.2	126	*
XRБ 35 42.5 3.2	35	42.5	3.2	128	*
XRБ 36 43.5 3.2	36	43.5	3.2	129	*
XRБ 40 51 4.2	40	51	4.2	224	*
XRБ 42 53 4.2	42	53	4.2	828	*
XRБ 45 56 4.2	45	56	4.2	830	*
XRБ 48 59 4.2	48	59	4.2	832	*
XRБ 50 61 4.2	50	61	4.2	833	*
XRБ 52 63 4.2	52	63	4.2	228	*
XRБ 55 66 4.2	55	66	4.2	836	*
XRБ 56 67 4.2	56	67	4.2	229	*
XRБ 60 71 4.2	60	71	4.2	839	*
XRБ 63 74 4.2	63	74	4.2	841	*
XRБ 65 76 4.2	65	76	4.2	232	*
XRБ 70 81 4.2	70	81	4.2	846	*
XRБ 75 86 4.2	75	86	4.2	235	*
XRБ 80 91 4.2	80	91	4.2	236	*
XRБ 85 96 4.2	85	96	4.2	238	*
XRБ 90 101 4.2	90	101	4.2	240	*
XRБ 95 106 4.2	95	106	4.2	241	*
XRБ 100 111 4.2	100	111	4.2	242	*
XRБ 105 116 4.2	105	116	4.2	244	*
XRБ 110 121 4.2	110	121	4.2	246	*
XRБ 115 126 4.2	115	126	4.2	247	*
XRБ 120 131 4.2	120	131	4.2	249	*
XRБ 125 136 4.2	125	136	4.2	250	*
XRБ 130 141 4.2	130	141	4.2	252	*
XRБ 135 146 4.2	135	146	4.2	254	*
XRБ 140 151 4.2	140	151	4.2	255	*
XRБ 145 156 4.2	145	156	4.2	257	*
XRБ 150 161 4.2	150	161	4.2	258	*
XRБ 160 171 4.2	160	171	4.2	259	*

* a richiesta - on request

Codice - Part No.	d ¹⁸	D ^{H9}	L ^{+0.2}	OR	€uro
XRБ 170 181 4.2	170	181	4.2	261	*
XRБ 180 191 4.2	180	191	4.2	263	*
XRБ 190 201 4.2	190	201	4.2	264	*
XRБ 200 215.5 6.3	200	215.5	6.3	369	*
XRБ 210 225.5 6.3	210	225.5	6.3	371	*
XRБ 220 235.5 6.3	220	235.5	6.3	373	*
XRБ 240 255.5 6.3	240	255.5	6.3	376	*
XRБ 250 265.5 6.3	250	265.5	6.3	377	*
XRБ 280 301 8.1	280	301	8.1	452	*
XRБ 300 321 8.1	300	321	8.1	453	*
XRБ 320 341 8.1	320	341	8.1	455	*
XRБ 350 371 8.1	350	371	8.1	457	*
XRБ 360 381 8.1	360	381	8.1	458	*
XRБ 400 421 8.1	400	421	8.1	461	*
XRБ 420 441 8.1	420	441	8.1	462	*
XRБ 450 471 8.1	450	471	8.1	465	*
XRБ 480 501 8.1	480	501	8.1	467	*
XRБ 500 521 8.1	500	521	8.1	469	*
XRБ 520 541 8.1	520	541	8.1	470	*
XRБ 550 571 8.1	550	571	8.1	471	*
XRБ 600 621 8.1	600	621	8.1	473	*
XRБ 650 678 9.5	650	678	9.5	660x8.4	*
XRБ 700 728 9.5	700	728	9.5	710x8.4	*
XRБ 750 778 9.5	750	778	9.5	760x8.4	*

XL TENUTA STELO A DOPPIO EFFETTO DOUBLE ACTING ROD SEAL

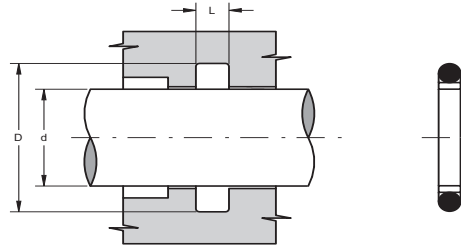

Codice - Part No.	d ¹⁷	D ^{H9}	L ^{+0.2}	OR	€uro
XL 610-5	5	9.5	2	610	*
XL 011-6	6	10.5	2	011	*

* a richiesta - on request

21

Codice - Part No.	d ¹⁷	D ^{H9}	L ^{+0.2}	OR	€uro
XL 012-8	8	12.5	2	012	*
XL 614-10	10	16.2	3	614	*
XL 113-12	12	18.2	3	113	*
XL 114-14	14	20.2	3	114	*
XL 809-15	15	21.1	3	809	*
XL 617-16	16	22.2	3	617	*
XL 116-18	18	24.1	3	116	*
XL 118-20	20	26.2	3	118	*
XL 119-22	22	28.2	3	119	*
XL 121-25	25	31.2	3	121	*
XL 217-28	28	36.0	4	217	*
XL 218-30	30	38.0	4	218	*
XL 219-32	32	39.9	4	219	*
XL 221-35	35	42.9	4	221	*
XL 824-38	38	46.0	4	824	*
XL 825-40	40	48.0	4	825	*
XL 224-42	42	50.0	4	224	*
XL 225-45	45	53.0	4	225	*
XL 329-50	50	61.6	6	329	*
XL 331-55	55	66.7	6	331	*
XL 331-56	56	67.6	6	331	*
XL 333-60	60	71.7	6	333	*
XL 334-63	63	74.7	6	334	*
XL 334-65	65	76.6	6	334	*
XL 336-70	70	81.7	6	336	*
XL 338-75	75	87.1	6	338	*
XL 339-80	80	92.1	6	339	*
XL 341-85	85	97.1	6	341	*
XL 342-90	90	102.1	6	342	*
XL 344-95	95	107.1	6	344	*
XL 345-100	100	112.1	6	345	*
XL 348-110	110	122.0	6	348	*
XL 428-120	120	135.5	8	428	*
XL 429-125	125	140.5	8	429	*
XL 431-130	130	145.5	8	431	*
XL 434-140	140	155.5	8	434	*
XL 437-150	150	165.5	8	437	*
XL 439-160	160	175.5	8	439	*
XL 878-170	170	186.3	8	878	*
XL 442-180	180	196.3	8	442	*


* a richiesta - on request

22



Codice - Part No.	d ¹⁷	D ^{H9}	L ^{+0.2}	OR	€uro
XL 884-190	190	206.3	8	884	*
XL 445-200	200	216.3	8	445	*
XL 449-250	250	266.3	8	449	*
XL 686-280	280	296.3	8	686	*
XL 453-300	300	316.3	8	453	*

XC TENUTA STELO A DOPPIO EFFETTO DOUBLE ACTING ROD SEAL

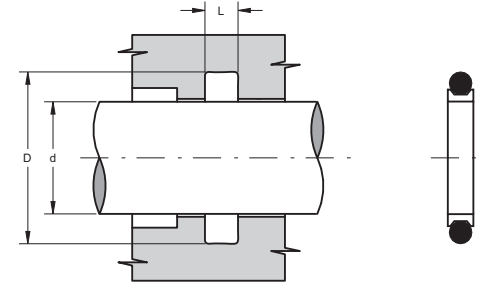

Codice - Part No.	d ¹⁷	D ^{H9}	L ^{+0.2}	OR	€uro
XC 007-3	3	6.5	2.5	007	*
XC 008-4	4	7.5	2.5	008	*
XC 009-5	5	8.5	2.5	009	*
XC 010-6	6	9.5	2.5	010	*
XC 011-8	8	11.5	2.5	011	*
XC 012-10	10	13.5	2.5	012	*
XC 110-9	9	14.5	3.5	110	*
XC 111-11	11	16.5	3.5	111	*
XC 112-12	12	17.5	3.5	112	*
XC 113-14	14	19.5	3.5	113	*
XC 114-15	15	20.5	3.5	114	*
XC 115-17	17	22.5	3.5	115	*
XC 210-19	19	26.1	4.5	210	*
XC 211-20	20	27.1	4.5	211	*
XC 212-22	22	29.1	4.5	212	*
XC 213-23	23	30.1	4.5	213	*
XC 214-25	25	32.1	4.5	214	*

* a richiesta - on request


Codice - Part No.	d ¹⁷	D ^{H9}	L ^{+0.2}	OR	€uro
XC 215-27	27	34.1	4.5	215	*
XC 216-28	28	35.1	4.5	216	*
XC 217-30	30	37.1	4.5	217	*
XC 218-31	31	38.1	4.5	218	*
XC 219-33	33	40.1	4.5	219	*
XC 220-35	35	42.1	4.5	220	*
XC 221-36	36	43.1	4.5	221	*
XC 325-38	38	48.4	7.0	325	*
XC 326-40	40	50.4	7.0	326	*
XC 327-45	45	55.4	7.0	327	*
XC 328-47	47	57.4	7.0	328	*
XC 329-50	50	60.4	7.0	329	*
XC 330-53	53	63.4	7.0	330	*
XC 331-57	57	67.4	7.0	331	*
XC 332-60	60	70.4	7.0	332	*
XC 333-63	63	73.4	7.0	333	*
XC 334-66	66	76.4	7.0	334	*
XC 335-70	70	80.4	7.0	335	*
XC 336-73	73	83.4	7.0	336	*
XC 337-75	75	85.4	7.0	337	*
XC 338-80	80	90.4	7.0	338	*
XC 339-82	82	92.4	7.0	339	*
XC 340-85	85	95.4	7.0	340	*
XC 341-90	90	100.4	7.0	341	*
XC 342-92	92	102.4	7.0	342	*
XC 343-95	95	105.4	7.0	343	*
XC 344-98	98	108.4	7.0	344	*
XC 345-100	100	110.4	7.0	345	*
XC 346-104	104	114.4	7.0	346	*
XC 347-107	107	117.4	7.0	347	*
XC 348-111	111	121.4	7.0	348	*
XC 425-114	114	127.7	9.5	425	*
XC 426-117	117	130.7	9.5	426	*
XC 427-120	120	133.7	9.5	427	*
XC 428-123	123	136.7	9.5	428	*
XC 429-126	126	139.7	9.5	429	*
XC 430-130	130	143.7	9.5	430	*
XC 431-133	133	146.7	9.5	431	*
XC 432-136	136	149.7	9.5	432	*
XC 433-139	139	152.7	9.5	433	*

* a richiesta - on request

Codice - Part No.	d ¹⁷	D ^{H9}	L ^{+0.2}	OR	€uro
XC 434-142	142	155.7	9.5	434	*
XC 435-145	145	158.7	9.5	435	*
XC 436-149	149	162.7	9.5	436	*
XC 437-152	152	165.7	9.5	437	*
XC 438-158	158	171.7	9.5	438	*
XC 439-165	165	178.7	9.5	439	*
XC 440-170	170	183.7	9.5	440	*
XC 441-178	178	191.7	9.5	441	*
XC 442-184	184	197.7	9.5	442	*
XC 443-190	190	203.7	9.5	443	*
XC 444-196	196	209.7	9.5	444	*
XC 445-203	203	216.7	9.5	445	*
XC 674-210	210	223.7	9.5	674	*
XC 446-215	215	228.7	9.5	446	*
XC 676-222	222	235.7	9.5	676	*
XC 447-230	230	243.7	9.5	447	*
XC 678-235	235	248.7	9.5	678	*
XC 448-240	240	253.7	9.5	448	*
XC 680-248	248	261.7	9.5	680	*
XC 449-255	255	268.7	9.5	449	*
XC 682-260	260	273.7	9.5	682	*
XC 450-265	265	278.7	9.5	450	*
XC 684-273	273	286.7	9.5	684	*
XC 451-280	280	293.7	9.5	451	*
XC 686-285	285	298.7	9.5	686	*
XC 452-292	292	305.7	9.5	452	*
XC 688-300	300	313.7	9.5	688	*
XC 453-305	305	318.7	9.5	453	*
XC 454-318	318	331.7	9.5	454	*
XC 455-330	330	343.7	9.5	455	*
XC 456-342	342	355.7	9.5	456	*
XC 457-355	355	368.7	9.5	457	*
XC 458-370	370	383.7	9.5	458	*
XC 459-380	380	393.7	9.5	459	*
XC 460-393	393	406.7	9.5	460	*

* a richiesta - on request

KD TENUTA PISTONE A LABBRI ASIMMETRICI PISTON SEAL WITH ASYMMETRIC LIPS

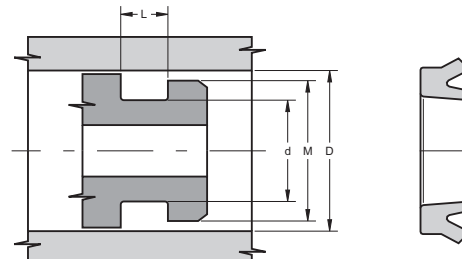

Codice - Part No.	D ^{H10}	d ¹⁸	L ^{+0.25}	M	€uro
KD 20 10 7.5	20	10	8.5	14	1,03
KD 20 12 5.3	20	12	5.8	15	1,09
KD 22 12 8	22	12	9.0	16	1,06
KD 25 13 7	25	13	8.0	17	1,12
KD 30 15 10	30	15	11.0	20	1,33
KD 30 20 8	30	20	9.0	24	1,36
KD 30 22 6	30	22	7.0	25	1,36
KD 31.75 19 7	31.75	19	8.0	24	1,42
KD 32 17 10	32	17	11.0	22	1,33
KD 32 22 10	32	22	11.0	26	1,42
KD 35 20 10	35	20	11.0	25	1,51
KD 35 22.5 6	35	22.5	7.0	27	1,42
KD 35 25 8	35	25	9.0	29	1,45
KD 38 31 4.7	38	31	5.2	34	1,48
KD 40 25 10	40	25	11.0	30	1,60
KD 40 30 6.5	40	30	7.5	34	1,54
KD 42 32 10	42	32	11.0	36	1,60
KD 45 30 10	45	30	11.0	35	1,86
KD 46 39.4 4	46	39.4	4.5	42	1,47
KD 50 35 10	50	35	11.0	40	2,07
KD 50 40 5	50	40	5.5	44	2,04
KD 50 40 10	50	40	11.0	44	2,04
KD 50 42 5.5	50	42	6.0	45	2,04
KD 50 42 8	50	42	9.0	45	2,04
KD 55 40 10	55	40	11.0	45	2,10
KD 60 40 12	60	40	13.0	45	2,22
KD 60 40 13.5	60	40	14.5	45	2,22


Codice - Part No.	D ^{H10}	d ¹⁸	L ^{+0.25}	M	€uro
KD 60 45 10	60	45	11.0	50	2,19
KD 60 50 7	60	50	8.0	54	2,19
KD 63 45 10	63	45	11.0	50	2,22
KD 63 48 10	63	48	11.0	53	2,22
KD 63 53 7	63	53	8.0	57	2,22
KD 65 45 12	65	45	13.0	50	2,25
KD 65 50 10	65	50	11.0	55	2,25
KD 65 55 10	65	55	11.0	59	2,25
KD 70 50 12	70	50	13.0	55	2,36
KD 70 50 15	70	50	16.0	55	2,36
KD 70 60 7	70	60	8.0	64	2,25
KD 70 60 8	70	60	9.0	64	2,25
KD 70 60 12	70	60	13.0	64	2,34
KD 75 65 5	75	65	5.5	69	2,39
KD 75 65 7	75	65	8.0	69	2,39
KD 75 65 10	75	65	11.0	69	2,39
KD 75 65 12	75	65	13.0	69	2,39
KD 80 60 12	80	60	13.0	65	2,66
KD 80 60 13.5	80	60	14.5	65	2,69
KD 80 65 12	80	65	13.0	70	2,57
KD 80 70 7	80	70	8.0	74	2,54
KD 85 65 13.5	85	65	14.5	70	2,69
KD 90 70 12	90	70	13.0	75	2,69
KD 90 70 13.5	90	70	14.5	75	2,69
KD 90 75 10	90	75	11.0	80	2,69
KD 90 75 12	90	75	13.0	80	2,69
KD 90 80 5	90	80	5.5	84	2,51
KD 95 85 7	95	85	8.0	89	2,75
KD 95 85 8.5	95	85	9.5	89	2,75
KD 95 87 4	95	87	4.5	91	2,75
KD 100 80 12	100	80	13.0	85	2,75
KD 100 85 12	100	85	13.0	90	2,78
KD 100 90 8	100	90	9.0	94	2,75
KD 105 85 12	105	85	13.0	90	2,87
KD 110 100 7	110	100	8.0	104	2,90
KD 120 100 12	120	100	13.0	105	3,40
KD 125 105 12	125	105	13.0	110	3,64
KD 180 160 13.5	180	160	14.5	165	6,62

Misure in pollici - Inch sizes

KD 3000 2385 0345	76.2	60.6	14.6	66.2	2,51
KD 4250 3640 0345	107.95	92.45	14.6	97.9	2,37




KDA TENUTA PISTONE A LABBRI ASIMMETRICI E ANELLO ANTIESTRUSIONE - PISTON SEAL WITH ASYMMETRIC LIPS AND ANTI-EXTRUSION RING

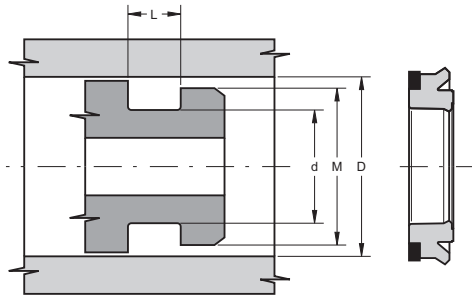

Codice - Part No.	D ^{H10}	d ¹⁸	L ^{+0.25}	M	€uro
KDA 40 25 9	40	25	9.5	35	2,11
KDA 45 30 9	45	30	9.5	40	2,30
KDA 50 35 9	50	35	9.5	45	2,68
KDA 55 40 9	55	40	9.5	50	3,07
KDA 60 40 14	60	40	14.5	54	3,79
KDA 60 45 9	60	45	9.5	55	3,45
KDA 63 48 9	63	48	9.5	58	3,83
KDA 65 50 9	65	50	9.5	60	4,22
KDA 70 50 12	70	50	12.5	64	4,60
KDA 70 55 9	70	55	9.5	64	4,98
KDA 75 55 12	75	55	12.5	69	5,17
KDA 80 60 12	80	60	12.5	74	5,36
KDA 80 65 9	80	65	9.5	75	5,75
KDA 85 70 9	85	70	9.5	80	5,94
KDA 90 70 12	90	70	12.5	84	6,13
KDA 90 75 9	90	75	9.5	85	6,51
KDA 100 80 12	100	80	12.5	94	6,71
KDA 100 85 9	100	85	9.5	95	7,09
KDA 100 85 14	100	85	14.5	95	3,96
KDA 105 85 12	105	85	12.5	99	7,09
KDA 110 90 12	110	90	12.5	104	7,47
KDA 110 95 9	110	95	9.5	105	7,86
KDA 115 95 12	115	95	12.5	109	8,05

Codice - Part No.	D ^{H10}	d ¹⁸	L ^{+0.25}	M	€uro
KDA 120 105 9	120	105	9.5	115	8,05
KDA 125 100 15	125	100	15.5	117	8,24
KDA 125 105 12	125	105	12.5	119	8,43
KDA 130 110 12	130	110	12.5	124	8,62
KDA 140 115 15	140	115	15.5	132	8,81
KDA 140 120 12	140	120	12.5	134	9,01
KDA 150 120 18.5	150	120	19.0	140	9,20
KDA 150 130 12	150	130	12.5	144	9,39
KDA 160 130 18.5	160	130	19.0	150	9,58
KDA 160 140 12	160	140	12.5	154	9,58
KDA 170 150 12	170	150	12.5	164	11,50
KDA 180 150 18.5	180	150	19.0	170	13,80
KDA 180 160 12	180	160	12.5	174	17,24
KDA 190 170 12	190	170	12.5	184	19,16
KDA 200 170 18.5	200	170	19.0	190	21,08
KDA 200 175 15	200	175	15.5	192	22,99
KDA 220 200 15	220	200	15.5	214	26,82
KDA 250 220 18.5	250	220	19.0	240	28,74
KDA 250 225 15	250	225	15.5	242	34,49

KDF TENUTA PISTONE CON GUIDA PISTON SEAL WITH WEAR RING

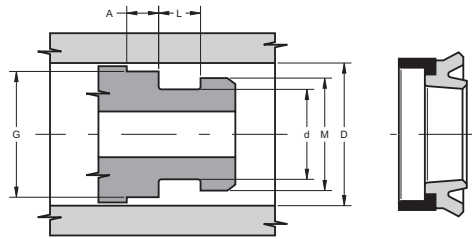


Codice - Part No.	D ^{H10}	d ¹⁸	L ^{+0.25}	A ^{+0.1}	G ^{-0.05}	M	€uro
KDF 32 20 8	32	20	9.0	6.35	28.50	24	1,74
KDF 35 22 9	35	22	10.0	6.35	31.40	27	1,86
KDF 40 25 8.5	40	25	9.5	6.35	35.40	30	2,13
KDF 40 26 8.5	40	26	9.5	6.35	35.40	31	2,13

25



Codice - Part No.	D ^{H10}	d ¹⁸	L ^{+0.25}	A ^{+0.1}	G ^{-0.05}	M	€uro
KDF 45 30 9	45	30	10.0	6.35	40.40	35	2,39
KDF 45 35 8.5	45	35	9.5	6.35	40.40	39	2,39
KDF 50 30 13.5	50	30	14.5	6.35	44.30	35	2,51
KDF 50 35 10	50	35	11.0	6.35	45.35	40	2,51
KDF 50 40 10	50	40	11.0	6.35	45.40	44	2,39
KDF 55 40 10	55	40	11.0	6.35	50.35	45	2,54
KDF 60 40 13.5	60	40	14.5	6.35	55.40	45	2,69
KDF 60 45 10	60	45	11.0	6.35	55.40	50	2,66
KDF 63 45 10	63	45	11.0	6.35	58.40	50	2,66
KDF 65 50 10	65	50	11.0	6.35	60.40	55	2,84
KDF 70 50 13.5	70	50	14.5	6.35	64.20	55	3,02
KDF 80 60 12	80	60	13.0	6.35	74.15	65	3,19
KDF 90 70 12	90	70	13.0	6.35	84.15	75	3,40
KDF 100 80 13.5	100	80	14.5	6.35	93.15	85	3,64
KDF 100 80 13.5/A	100	80	14.5	6.35	94.15	85	3,64
KDF 110 95 12	110	95	13.0	6.35	103.10	100	3,87
KDF 120 100 13.5	120	100	14.5	6.35	113.10	105	4,26

SP ANELLO DI SPALLAMENTO RETAINING RING

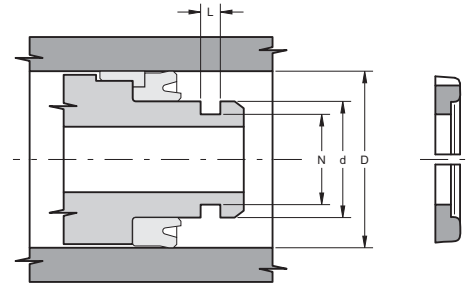


Codice - Part No.	D ^{H10}	d ^{+0.1}	N ^{+0.1}	L ^{-0.2/+0.1}	€uro
SP 32 20	32	20	15.80	3.10	0,59
SP 35 22	35	22	17.80	3.10	0,59
SP 40 26	40	26	21.60	3.10	0,65
SP 45 30	45	30	25.80	3.10	0,65

26

Codice - Part No.	D ^{H10}	d ^{+0.1}	N ^{+0.1}	L ^{-0.2/+0.1}	€uro
SP 50 30	50	30	25.80	3.35	0,65
SP 55 40	55	40	35.80	3.10	0,65
SP 60 40	60	40	36.10	3.35	0,65
SP 63 45	63	45	40.84	3.10	0,71
SP 70 50	70	50	45.84	3.35	0,71
SP 90 70	90	70	66.10	3.35	0,86

KPD TENUTA PISTONE A DOPPIO EFFETTO DOUBLE ACTING PISTON SEAL

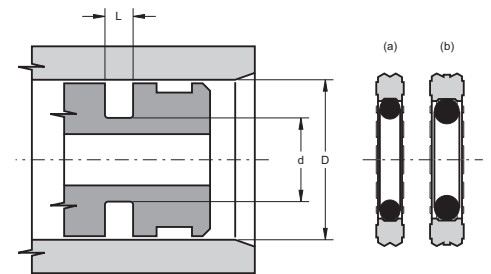


Codice - Part No.	D ^{H10}	d ^{+0.1}	L ^{-0.2}	OR	Tipo-Type	€uro
KPD 15 7.5 3.2	15	7.5	3.2	108	(a)	1,29
KPD 16 8.5 3.2	16	8.5	3.2	109	(a)	1,29
KPD 20 12.5 3.2	20	12.5	3.2	112	(a)	1,38
KPD 22 14.5 3.2	22	14.5	3.2	113	(a)	1,44
KPD 25 14 4.2	25	14.0	4.2	207	(b)	1,47
KPD 25 17.5 3.2	25	17.5	3.2	115	(a)	1,47
KPD 30 22.5 3.2	30	22.5	3.2	118	(a)	1,52
KPD 32 21 4.2	32	21.0	4.2	211	(b)	1,64
KPD 32 24.5 3.2	32	24.5	3.2	119	(a)	1,64
KPD 35 24 4.2	35	24.0	4.2	213	(b)	1,78
KPD 35 27.5 3.2	35	27.5	3.2	121	(a)	1,78
KPD 38 30.5 3.2	38	30.5	3.2	123	(a)	1,81
KPD 40 32.5 3.2	40	32.5	3.2	124	(a)	1,81
KPD 40 29 4.2	40	29.0	4.2	216	(b)	1,81
KPD 40 24.5 6.3	40	24.5	6.3	318	(b)	1,81



Codice - Part No.	D ^{H10}	d ^{+0.1}	L ^{+0.2}	OR	Tipo-Type	€uro
KPD 42 31 4.2	42	31.0	4.2	217	(b)	1,92
KPD 45 29.5 6.3	45	29.5	6.3	320	(b)	1,92
KPD 45 34 4.2	45	34.0	4.2	219	(b)	1,92
KPD 48 37 4.2	48	37.0	4.2	221	(b)	2,13
KPD 49 38 4.2	49	38.0	4.2	222	(b)	2,13
KPD 50 34.5 6.3	50	34.5	6.3	324	(b)	2,13
KPD 50 39 4.2	50	39.0	4.2	222	(b)	2,13
KPD 52 36.5 6.3	52	36.5	6.3	324	(b)	2,27
KPD 54 43 4.2	54	43.0	4.2	826	(b)	2,41
KPD 55 39.5 6.3	55	39.5	6.3	325	(b)	2,41
KPD 55 44 4.2	55	44.0	4.2	224	(b)	2,41
KPD 57.16 47.6 4.8	57.16	47.6	4.8	47x4	(b)	2,56
KPD 60 44.5 6.3	60	44.5	6.3	327	(b)	2,70
KPD 60 49 4.2	60	49.0	4.2	225	(b)	2,70
KPD 63 47.5 6.3	63	47.5	6.3	328	(b)	2,79
KPD 63 52 4.2	63	52.0	4.2	226	(b)	2,79
KPD 65 49.5 6.3	65	49.5	6.3	328	(b)	2,90
KPD 65 54 4.2	65	54.0	4.2	227	(b)	2,90
KPD 70 54.5 6.3	70	54.5	6.3	330	(b)	2,93
KPD 70 59 4.2	70	59.0	4.2	228	(b)	2,93

KGD TENUTA PISTONE DOPPIO EFFETTO CON GUIDE
DOUBLE ACTING SEAL WITH WEAR RINGS

Codice - Part No.	D ^{H10}	d ^{+0.1}	L ^{+0.2}	OR	Tipo-Type	€uro
KPD 75 59.5 6.3	75	59.5	6.3	331	(b)	3,19
KPD 75 64 4.2	75	64.0	4.2	230	(b)	3,19
KPD 80 64.5 6.3	80	64.5	6.3	333	(b)	3,33
KPD 80 69 4.2	80	69.0	4.2	842	(b)	3,33
KPD 85 69.5 6.3	85	69.5	6.3	335	(b)	3,76
KPD 90 74.5 6.3	90	74.5	6.3	336	(b)	3,91
KPD 95 79.5 6.3	95	79.5	6.3	338	(b)	4,18
KPD 100 84.5 6.3	100	84.5	6.3	339	(b)	4,45
KPD 110 94.5 6.3	110	94.5	6.3	343	(b)	4,94
KPD 115 94 8.1	115	94.0	8.1	94x7	(b)	5,34
KPD 120 104.5 6.3	120	104.5	6.3	346	(b)	5,34
KPD 125 109.5 6.3	125	109.5	6.3	347	(b)	6,03
KPD 130 114.5 6.3	130	114.5	6.3	349	(b)	6,12
KPD 140 119 8.1	140	119.0	8.1	426	(b)	6,69
KPD 150 129 8.1	150	129.0	8.1	430	(b)	7,50
KPD 160 139 8.1	160	139.0	8.1	433	(b)	7,78
KPD 170 149 8.1	170	149.0	8.1	436	(b)	8,56
KPD 180 159 8.1	180	159.0	8.1	438	(b)	9,14
KPD 200 179 8.1	200	179.0	8.1	441	(b)	10,60
KPD 250 229 8.1	250	229.0	8.1	447	(b)	20,02

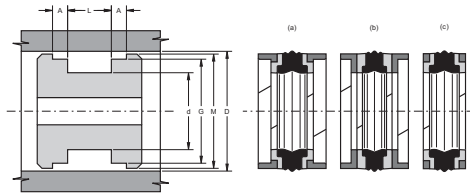

Codice - Part No.	D ^{H10}	d ^{+0.1}	L ^{+0.2}	A ^{+0.1}	G ^{-0.05}	M ^{+0.2}	Tipo-Type	€uro
KGD 20 11	20	11	13.5	2.10	17.00	19.0	(a)	2,60
KGD 25 15	25	15	16.4	6.35	21.45	23.5	(a)	2,66
KGD 25 15/A	25	15	12.0	4.00	21.00	23.0	(a)	2,66
KGD 25 15/B	25	15	12.5	4.00	22.00	24.0	(a)	2,66
KGD 25 16	25	16	13.5	2.10	22.00	24.0	(a)	2,66
KGD 30 17	30	17	15.4	6.35	26.50	29.0	(a)	3,19
KGD 30 21	30	21	13.5	2.10	27.00	29.0	(a)	2,72
KGD 32 22	32	22	16.4	6.35	28.50	30.5	(a)	2,84



Codice - Part No.	D ^{H10}	d ^{+0.1}	L ^{+0.2}	A ^{+0.1}	G ^{-0.05}	M ^{+0.2}	Tipo-Type	€uro
KGD 32 22/A	32	22	15.5	2.60	28.00	31.0	(a)	2,84
KGD 32 22/C	32	22	12.5	4.00	29.00	31.0	(a)	2,05
KGD 32 24	32	24	15.5	3.20	28.00	31.4	(b)	2,84
KGD 35 25	35	25	16.4	6.35	31.40	33.5	(a)	3,02
KGD 35 25/A	35	25	15.5	2.60	31.00	34.0	(a)	3,02
KGD 40 24	40	24	18.4	6.35	35.40	38.5	(a)	3,19
KGD 40 26	40	26	15.5	2.60	36.00	39.0	(a)	3,19
KGD 40 30	40	30	16.4	6.35	35.40	38.5	(a)	3,19
KGD 40 30/A	40	30	12.5	4.00	36.00	38.0	(a)	3,19
KGD 40 30/AE	40	30	16.4	-	-	38.5	(c)	3,19
KGD 40 30/B	40	30	12.5	4.00	37.00	39.0	(a)	3,19
KGD 40 32	40	32	15.5	3.20	36.00	39.4	(b)	3,19
KGD 45 29	45	29	18.4	6.35	40.40	43.7	(a)	3,31
KGD 45 31	45	31	15.5	2.60	41.00	44.0	(a)	3,31
KGD 45 35	45	35	16.4	6.35	40.40	43.5	(a)	3,31
KGD 50 34	50	34	18.4	6.35	45.40	48.5	(a)	3,67
KGD 50 34/A	50	34	20.5	3.10	46.00	49.0	(a)	3,67
KGD 50 34/AE	50	34	18.4	-	-	48.5	(c)	3,67
KGD 50 38	50	38	20.5	4.20	46.00	49.4	(b)	3,67
KGD 50 40	50	40	12.5	4.00	47.00	49.0	(a)	3,67
KGD 55 39	55	39	18.4	6.35	50.36	53.5	(a)	3,87
KGD 55 39/A	55	39	20.5	3.10	51.00	54.0	(a)	3,87
KGD 55 43	55	43	20.5	4.20	51.00	54.4	(b)	3,87
KGD 60 44	60	44	18.4	6.35	55.40	58.5	(a)	4,20
KGD 60 44/A	60	44	20.5	3.10	56.00	59.0	(a)	4,20
KGD 60 48	60	48	20.5	4.20	56.00	59.4	(b)	4,20
KGD 63 47	63	47	18.4	6.35	58.40	61.5	(a)	4,35
KGD 63 47/A	63	47	20.5	3.10	59.00	62.0	(a)	4,35
KGD 63 47/B	63	47	19.4	6.35	58.40	61.5	(a)	4,35
KGD 63 51	63	51	20.5	4.20	59.00	62.4	(b)	4,35
KGD 65 49	65	49	20.5	3.10	61.00	64.0	(a)	4,49
KGD 65 50	65	50	18.4	6.35	60.40	63.5	(a)	4,49
KGD 70 50	70	50	22.4	6.35	64.20	68.3	(a)	4,73
KGD 70 54	70	54	20.5	3.10	66.00	69.0	(a)	4,73
KGD 70 58	70	58	20.5	4.20	66.00	69.4	(b)	4,73
KGD 75 55	75	55	22.4	6.35	69.20	73.3	(a)	4,88
KGD 75 59	75	59	20.5	3.10	71.00	74.0	(a)	5,11
KGD 80 60	80	60	22.4	6.35	74.15	78.3	(a)	5,17
KGD 80 60/C	80	60	25.0	6.35	75.00	78.00	(a)	5,17
KGD 80 62	80	62	22.5	3.60	76.00	79.0	(a)	5,17
KGD 80 66	80	66	22.5	5.20	76.00	79.4	(b)	5,17



Codice - Part No.	D ^{H10}	d ^{+0.1}	L ^{+0.2}	A ^{+0.1}	G ^{-0.05}	M ^{+0.2}	Tipo-Type	€uro
KGD 85 65	85	65	22.4	6.35	79.15	83.3	(a)	5,50
KGD 85 65/AE	85	65	22.4	-	-	83.3	(c)	5,50
KGD 90 70	90	70	22.4	6.35	84.15	88.3	(a)	5,97
KGD 90 72	90	72	22.5	3.60	86.00	89.0	(a)	5,97
KGD 90 76	90	76	22.5	5.20	86.00	89.4	(b)	5,97
KGD 95 75	95	75	22.4	6.35	89.15	93.3	(a)	6,18
KGD 100 75	100	75	22.4	6.35	93.15	98.0	(a)	6,68
KGD 100 80	100	80	25.4	6.35	94.15	98.3	(a)	6,68
KGD 100 80/D	100	80	25.0	6.30	95.00	98.00	(a)	6,68
KGD 100 82	100	82	22.5	3.60	96.00	99.0	(a)	6,68
KGD 100 86	100	86	22.5	5.20	96.00	99.4	(b)	6,68
KGD 105 80	105	80	22.4	6.35	98.10	103.0	(a)	6,86
KGD 110 85	110	85	22.4	6.35	103.10	108.0	(a)	7,42
KGD 110 92	110	92	22.5	3.60	106.00	109.0	(a)	7,42
KGD 110 96	110	96	22.5	5.20	106.00	109.4	(b)	7,42
KGD 115 90	115	90	22.4	6.35	108.10	113.0	(a)	7,48
KGD 120 95	120	95	22.4	6.35	113.10	118.1	(a)	7,75
KGD 120 106	120	106	22.5	5.20	116.00	119.4	(b)	7,54
KGD 125 100	125	100	25.4	6.35	118.10	123.0	(a)	7,95
KGD 125 103	125	103	26.5	5.10	121.00	124.0	(a)	7,95
KGD 125 108	125	108	26.5	7.20	121.00	124.4	(b)	7,95
KGD 130 105	130	105	25.4	9.50	122.60	127.5	(a)	8,84
KGD 130 105/A	130	105	25.4	6.35	123.10	128.0	(a)	8,84
KGD 135 110	135	110	25.4	9.50	127.60	132.5	(a)	9,37
KGD 135 110/A	135	110	25.4	6.35	128.10	133.0	(a)	9,37
KGD 140 115	140	115	25.4	9.50	132.60	137.5	(a)	9,73
KGD 140 115/A	140	115	25.4	6.35	133.00	138.0	(a)	9,73
KGD 140 118	140	118	26.5	5.10	136.00	139.0	(a)	9,73
KGD 140 123	140	123	26.5	7.20	136.00	139.4	(b)	9,73
KGD 145 120	145	120	25.4	9.50	137.60	142.5	(a)	10,11
KGD 145 120/A	145	120	25.4	6.35	138.30	142.95	(a)	10,11
KGD 150 125	150	125	25.4	9.50	142.60	147.5	(a)	10,32
KGD 150 125/A	150	125	25.4	6.35	143.00	148.0	(a)	10,32
KGD 160 130	160	130	25.4	6.35	153.00	157.5	(a)	11,94
KGD 160 130/A	160	130	25.4	9.50	152.60	157.5	(a)	11,94
KGD 160 135	160	135	25.4	9.50	152.60	157.5	(a)	11,50
KGD 170 145	170	145	25.4	12.70	161.70	167.1	(a)	12,27
KGD 175 150	175	150	25.4	12.70	166.70	172.1	(a)	12,53
KGD 180 155	180	155	25.4	12.70	171.70	177.1	(a)	12,74
KGD 185 160	185	160	25.4	12.70	176.70	182.1	(a)	13,24
KGD 190 165	190	165	25.4	12.70	181.70	187.0	(a)	13,78




Codice - Part No.	D ^{H10}	d ^{+0.1}	L ^{+0.2}	A ^{+0.1}	G ^{-0.05}	M ^{+0.2}	Tipo-Type	€uro
KGD 200 175	200	175	25.4	12.70	191.60	197.0	(a)	17,38
KGD 220 190	220	190	35.4	6.35	212.70	217.9	(a)	31,69
KGD 220 195	220	195	25.4	12.70	211.60	217.0	(a)	27,20
KGD 250 220	250	220	35.4	6.35	242.90	247.9	(a)	39,02
KGD 250 225	250	225	25.4	12.70	241.60	247.0	(a)	33,46

Misure in pollici - Inch sizes

KGD 2000 1375	50.80	34.92	19.05	6.35	46.23	49.48	(a)	3,70
KGD 2000 1625	50.80	41.27	11.10	3.81	46.27	49.19	(a)	3,70
KGD 2375 1750	60.33	44.45	19.05	6.35	55.73	58.98	(a)	4,20
KGD 2500 1875	63.50	47.62	19.05	6.35	58.90	62.12	(a)	4,35
KGD 2500 2125	63.50	53.97	11.10	3.81	59.00	62.12	(a)	4,35
KGD 3000 2250	76.20	57.15	23.79	6.35	70.40	74.50	(a)	4,88
KGD 3500 2750	88.90	69.85	23.79	6.35	83.08	87.22	(a)	5,97
KGD 4000 3250	101.60	82.55	23.79	6.35	95.78	99.92	(a)	6,86

YB

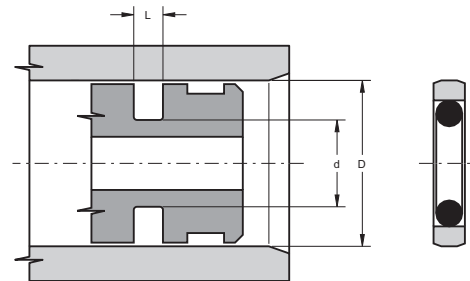TENUTA PISTONE A DOPPIO EFFETTO
DOUBLE ACTING PISTON SEAL

Codice - Part No.	D ^{H9}	d ^{H9}	L ^{+0.2}	OR	€uro
YB 8 3.1 2.2	8	3.1	2.2	006	*
YB 10 5.1 2.2	10	5.1	2.2	009	*
YB 12 7.1 2.2	12	7.1	2.2	011	*
YB 15 7.5 3.2	15	7.5	3.2	109	*
YB 16 8.5 3.2	16	8.5	3.2	109	*

* a richiesta - on request

Codice - Part No.	D ^{H9}	d ^{H9}	L ^{+0.2}	OR	€uro
YB 18 10.5 3.2	18	10.5	3.2	110	*
YB 20 12.5 3.2	20	12.5	3.2	111	*
YB 22 14.5 3.2	22	14.5	3.2	113	*
YB 24 16.5 3.2	24	16.5	3.2	809	*
YB 25 17.5 3.2	25	17.5	3.2	115	*
YB 28 20.5 3.2	28	20.5	3.2	117	*
YB 30 22.5 3.2	30	22.5	3.2	118	*
YB 32 24.5 3.2	32	24.5	3.2	119	*
YB 35 27.5 3.2	35	27.5	3.2	121	*
YB 36 28.5 3.2	36	28.5	3.2	122	*
YB 38 30.5 3.2	38	30.5	3.2	123	*
YB 39 31.5 3.2	39	31.5	3.2	124	*
YB 40 29 4.2	40	29.0	4.2	216	*
YB 42 31 4.2	42	31.0	4.2	217	*
YB 45 34 4.2	45	34.0	4.2	219	*
YB 48 37 4.2	48	37.0	4.2	221	*
YB 50 39 4.2	50	39.0	4.2	222	*
YB 52 41 4.2	52	41.0	4.2	223	*
YB 55 44 4.2	55	44.0	4.2	224	*
YB 57 46 4.2	57	46.0	4.2	827	*
YB 60 49 4.2	60	49.0	4.2	225	*
YB 63 52 4.2	63	52.0	4.2	226	*

* a richiesta - on request




Codice - Part No.	D ^{H9}	d ^{H9}	L ^{+0.2}	OR	€uro
YB 64 53 4.2	64	53.0	4.2	226	*
YB 65 54 4.2	65	54.0	4.2	227	*
YB 70 59 4.2	70	59.0	4.2	228	*
YB 75 64 4.2	75	64.0	4.2	230	*
YB 80 64.5 6.3	80	64.5	6.3	333	*
YB 85 69.5 6.3	85	69.5	6.3	335	*
YB 89 73.5 6.3	89	73.5	6.3	336	*
YB 90 74.5 6.3	90	74.5	6.3	336	*
YB 95 79.5 6.3	95	79.5	6.3	338	*
YB 100 84.5 6.3	100	84.5	6.3	339	*
YB 105 89.5 6.3	105	89.5	6.3	341	*
YB 110 94.5 6.3	110	94.5	6.3	343	*
YB 115 99.5 6.3	115	99.5	6.3	344	*
YB 120 104.5 6.3	120	104.5	6.3	346	*
YB 125 109.5 6.3	125	109.5	6.3	347	*
YB 130 114.5 6.3	130	114.5	6.3	349	*
YB 132 116.5 6.3	132	116.5	6.3	350	*
YB 133 112 8.1	133	112.0	8.1	425	*
YB 135 114 8.1	135	114.0	8.1	425	*
YB 140 119 8.1	140	119.0	8.1	426	*
YB 145 124 8.1	145	124.0	8.1	428	*
YB 150 129 8.1	150	129.0	8.1	429	*
YB 154 133 8.1	154	133.0	8.1	431	*
YB 155 134 8.1	155	134.0	8.1	431	*
YB 160 139 8.1	160	139.0	8.1	433	*
YB 165 144 8.1	165	144.0	8.1	434	*
YB 170 149 8.1	170	149.0	8.1	436	*
YB 175 154 8.1	175	154.0	8.1	437	*
YB 180 159 8.1	180	159.0	8.1	438	*
YB 185 164 8.1	185	164.0	8.1	874	*
YB 190 169 8.1	190	169.0	8.1	439	*
YB 200 179 8.1	200	179.0	8.1	441	*
YB 210 189 8.1	210	189.0	8.1	442	*
YB 220 199 8.1	220	199.0	8.1	444	*
YB 230 209 8.1	230	209.0	8.1	445	*
YB 240 219 8.1	240	219.0	8.1	446	*
YB 250 229 8.1	250	229.0	8.1	447	*
YB 260 239 8.1	260	239.0	8.1	447	*
YB 270 249 8.1	270	249.0	8.1	448	*
YB 280 259 8.1	280	259.0	8.1	449	*

* a richiesta - on request

Codice - Part No.	D ^{H9}	d ^{H9}	L ^{+0.2}	OR	€uro
YB 290 269 8.1	290	269.0	8.1	450	*
YB 300 279 8.1	300	279.0	8.1	451	*

YAB TENUTA PISTONE A SEMPLICE EFFETTO SINGLE ACTING PISTON SEAL

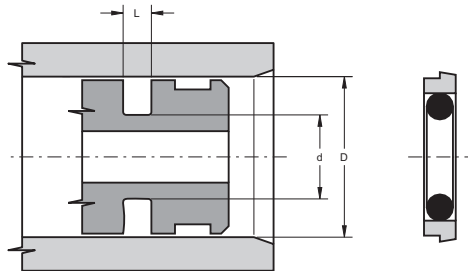

Codice - Part No.	D ^{H9}	d ^{H9}	L ^{+0.2}	OR	€uro
YAB 8 3.1 2.2	8	3.1	2.2	006	*
YAB 10 5.1 2.2	10	5.1	2.2	009	*
YAB 12 7.1 2.2	12	7.1	2.2	011	*
YAB 15 10.1 2.2	15	10.1	2.2	012	*
YAB 16 11.1 2.2	16	11.1	2.2	013	*
YAB 18 10.7 3.2	18	10.7	3.2	111	*
YAB 20 12.7 3.2	20	12.7	3.2	112	*
YAB 22 14.7 3.2	22	14.7	3.2	113	*
YAB 24 16.7 3.2	24	16.7	3.2	809	*
YAB 25 17.7 3.2	25	17.7	3.2	115	*
YAB 28 17.3 4.2	28	17.3	4.2	209	*
YAB 30 19.3 4.2	30	19.3	4.2	210	*
YAB 32 21.3 4.2	32	21.3	4.2	211	*
YAB 35 24.3 4.2	35	24.3	4.2	213	*
YAB 36 25.3 4.2	36	25.3	4.2	214	*
YAB 38 27.3 4.2	38	27.3	4.2	215	*
YAB 39 28.3 4.2	39	28.3	4.2	215	*
YAB 40 29.3 4.2	40	29.3	4.2	216	*
YAB 42 31.3 4.2	42	31.3	4.2	217	*

* a richiesta - on request

31




Codice - Part No.	D ^{H9}	d ^{H9}	L ^{+0.2}	OR	€uro
YAB 45 34.3 4.2	45	34.3	4.2	219	*
YAB 48 37.3 4.2	48	37.3	4.2	221	*
YAB 50 39.3 4.2	50	39.3	4.2	222	*
YAB 52 41.3 4.2	52	41.3	4.2	223	*
YAB 55 44.3 4.2	55	44.3	4.2	224	*
YAB 57 46.3 4.2	57	46.3	4.2	828	*
YAB 60 44.9 6.3	60	44.9	6.3	327	*
YAB 63 47.9 6.3	63	47.9	6.3	328	*
YAB 64 48.9 6.3	64	48.9	6.3	328	*
YAB 65 49.9 6.3	65	49.9	6.3	328	*
YAB 70 54.9 6.3	70	54.9	6.3	330	*
YAB 75 59.9 6.3	75	59.9	6.3	332	*
YAB 80 64.9 6.3	80	64.9	6.3	333	*
YAB 85 69.9 6.3	85	69.9	6.3	335	*
YAB 89 73.9 6.3	89	73.9	6.3	336	*
YAB 90 74.9 6.3	90	74.9	6.3	336	*
YAB 95 79.9 6.3	95	79.9	6.3	337	*
YAB 100 84.9 6.3	100	84.9	6.3	340	*
YAB 105 89.9 6.3	105	89.9	6.3	341	*
YAB 110 94.9 6.3	110	94.9	6.3	343	*
YAB 115 99.9 6.3	115	99.9	6.3	344	*
YAB 120 104.9 6.3	120	104.9	6.3	346	*
YAB 125 109.9 6.3	125	109.9	6.3	347	*
YAB 130 114.9 6.3	130	114.9	6.3	349	*
YAB 132 116.9 6.3	132	116.9	6.3	349	*
YAB 133 117.9 6.3	133	117.9	6.3	350	*
YAB 135 119.9 6.3	135	119.9	6.3	351	*
YAB 140 124.9 6.3	140	124.9	6.3	352	*
YAB 145 129.9 6.3	145	129.9	6.3	353	*
YAB 150 134.9 6.3	150	134.9	6.3	355	*
YAB 154 138.9 6.3	154	138.9	6.3	356	*
YAB 155 139.9 6.3	155	139.9	6.3	356	*
YAB 160 144.9 6.3	160	144.9	6.3	358	*
YAB 165 149.9 6.3	165	149.9	6.3	360	*
YAB 170 154.9 6.3	170	154.9	6.3	361	*
YAB 175 159.9 6.3	175	159.9	6.3	362	*
YAB 180 164.9 6.3	180	164.9	6.3	363	*
YAB 185 169.9 6.3	185	169.9	6.3	363	*
YAB 190 174.9 6.3	190	174.9	6.3	364	*

* a richiesta - on request

32

Codice - Part No.	D ^{H9}	d ^{H9}	L ^{+0.2}	OR	€uro
YAB 200 179.5 8.1	200	179.5	8.1	441	*
YAB 210 189.5 8.1	210	189.5	8.1	443	*
YAB 220 199.5 8.1	220	199.5	8.1	444	*
YAB 230 209.5 8.1	230	209.5	8.1	445	*
YAB 240 219.5 8.1	240	219.5	8.1	446	*
YAB 250 229.5 8.1	250	229.5	8.1	447	*
YAB 260 236 8.1	260	236.0	8.1	447	*
YAB 270 246 8.1	270	246.0	8.1	448	*
YAB 280 256 8.1	280	256.0	8.1	449	*
YAB 290 266 8.1	290	266.0	8.1	449	*
YAB 300 276 8.1	300	276.0	8.1	451	*

KHD TENUTA PISTONE A DOPPIO EFFETTO DOUBLE ACTING PISTON SEAL

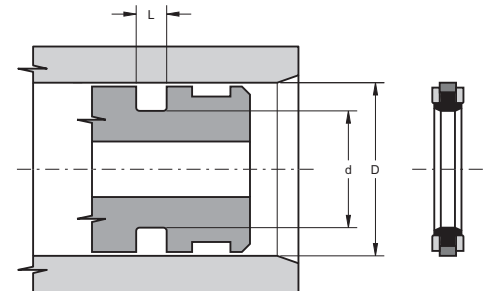


Codice - Part No.	D ^{H9}	d ^{+0.1}	L ^{+0.2}	€uro
KHD 50 36 9	50	36	9	5,13
KHD 60 46 9	60	46	9	6,41
KHD 65 50 11	65	50	11	7,05
KHD 70 55 11	70	55	11	7,69
KHD 75 60 11	75	60	11	8,33
KHD 80 65 11	80	65	11	8,97
KHD 85 70 11	85	70	11	9,61
KHD 90 75 11	90	75	11	10,24
KHD 95 80 11	95	80	11	10,88
KHD 100 85 12.5	100	85	12.5	11,52

* a richiesta - on request



Codice - Part No.	D ^{H8}	d ^{H9.1}	L ^{+0.2}	€uro
KHD 105 90 12.5	105	90	12.5	12,16
KHD 110 95 12.5	110	95	12.5	12,80
KHD 115 100 12.5	115	100	12.5	13,44
KHD 120 105 12.5	120	105	12.5	14,08
KHD 125 102 16	125	102	16	15,69
KHD 130 107 16	130	107	16	18,88
KHD 135 112 16	135	112	16	22,08
KHD 140 117 16	140	117	16	25,28
KHD 145 122 16	145	122	16	28,47
KHD 150 127 16	150	127	16	31,67
KHD 160 137 16	160	137	16	38,06
KHD 165 142 16	165	142	16	41,26
KHD 170 147 16	170	147	16	44,45
KHD 180 157 16	180	157	16	50,85
KHD 185 162 16	185	162	16	54,04
KHD 200 177 16	200	177	16	63,63

YL TENUTA PISTONE A DOPPIO EFFETTO DOUBLE ACTING PISTON SEAL

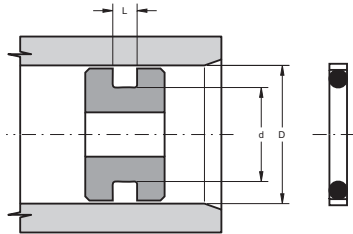

Codice - Part No.	D ^{H8}	d ^{H9}	L ^{+0.2}	OR	€uro
YL 007-8	8	3.4	2	007	*
YL 008-9	9	4.4	2	008	*
YL 009-10	10	5.5	2	009	*
YL 010-11	11	6.5	2	010	*
YL 011-12	12	7.4	2	011	*
YL 012-14	14	9.5	2	012	*
YL 013-15	15	10.4	2	013	*

* a richiesta - on request


Codice - Part No.	D ^{H8}	d ^{H9}	L ^{+0.2}	OR	€uro
YL 613-16	16	9.8	3	613	*
YL 111-17	17	10.8	3	111	*
YL 614-18	18	11.8	3	614	*
YL 113-20	20	13.8	3	113	*
YL 114-22	22	15.8	3	114	*
YL 116-25	25	18.8	3	116	*
YL 211-28	28	20.0	4	211	*
YL 212-30	30	22.0	4	212	*
YL 213-32	32	24.0	4	213	*
YL 215-35	35	27.0	4	215	*
YL 216-36	36	28.0	4	216	*
YL 217-38	38	30.0	4	217	*
YL 218-40	40	32.0	4	218	*
YL 219-42	42	34.0	4	219	*
YL 221-45	45	37.0	4	221	*
YL 824-48	48	40.0	4	824	*
YL 325-50	50	38.3	6	325	*
YL 326-55	55	43.5	6	326	*
YL 327-56	56	44.3	6	327	*
YL 328-60	60	48.3	6	328	*
YL 329-63	63	51.3	6	329	*
YL 330-65	65	53.3	6	330	*
YL 331-70	70	58.4	6	331	*
YL 333-75	75	62.9	6	333	*
YL 334-80	80	68.0	6	334	*
YL 336-85	85	72.9	6	336	*
YL 337-90	90	78.0	6	337	*
YL 339-95	95	82.9	6	339	*
YL 340-100	100	88.0	6	340	*
YL 344-110	110	97.9	6	344	*
YL 347-120	120	107.9	6	347	*
YL 348-125	125	112.5	6	348	*
YL 860-130	130	117.5	6	860	*
YL 428-140	140	124.5	8	428	*
YL 431-150	150	134.5	8	431	*
YL 434-160	160	144.5	8	434	*
YL 437-170	170	153.7	8	437	*
YL 874-180	180	163.7	8	874	*
YL 440-190	190	173.7	8	440	*
YL 442-200	200	183.7	8	442	*

* a richiesta - on request

33

Codice - Part No.	D ^{H8}	d ^{H9}	L ^{+0.2}	OR	€uro
YL 678-250	250	233.7	8	678	*
YL 682-280	280	263.7	8	682	*
YL 451-300	300	283.7	8	451	*

YP TENUTA PISTONE A DOPPIO EFFETTO DOUBLE ACTING PISTON SEAL

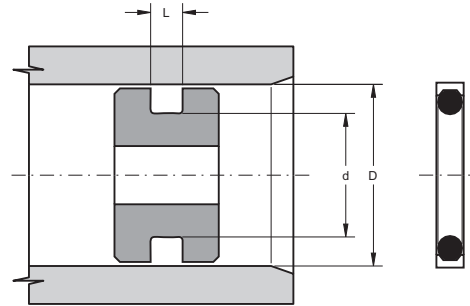

Codice - Part No.	D ^{H8}	d ^{H9}	L ^{+0.2}	OR	€uro
YP 004-6	6	2.8	2.5	004	*
YP 006-7	7	3.7	2.5	006	*
YP 008-8	8	4.7	2.5	008	*
YP 009-9	9	5.7	2.5	009	*
YP 010-10	10	6.8	2.5	010	*
YP 011-11	11	7.6	2.5	011	*
YP 012-13	13	9.7	2.5	012	*
YP 110-15	15	10.1	3.5	110	*
YP 111-16	16	10.9	3.5	111	*
YP 112-18	18	13.1	3.5	112	*
YP 113-20	20	14.7	3.5	113	*
YP 114-21	21	15.9	3.5	114	*
YP 115-22	22	16.6	3.5	115	*
YP 116-25	25	19.8	3.5	116	*
YP 210-26	26	19.1	4.5	210	*
YP 211-28	28	21.2	4.5	211	*
YP 212-29	29	22.0	4.5	212	*

* a richiesta - on request

34



Codice - Part No.	D ^{H8}	d ^{H9}	L ^{+0.2}	OR	€uro
YP 213-30	30	22.9	4.5	213	*
YP 214-32	32	25.0	4.5	214	*
YP 215-34	34	27.0	4.5	215	*
YP 216-35	35	28.0	4.5	216	*
YP 217-37	37	30.0	4.5	217	*
YP 218-38	38	30.9	4.5	218	*
YP 219-40	40	32.9	4.5	219	*
YP 220-42	42	35.0	4.5	220	*
YP 221-43	43	35.9	4.5	221	*
YP 222-45	45	37.9	4.5	222	*
YP 325-50	50	39.6	7.0	325	*
YP 326-52	52	41.8	7.0	326	*
YP 327-55	55	44.7	7.0	327	*
YP 328-58	58	47.7	7.0	328	*
YP 329-61	61	50.5	7.0	329	*
YP 330-65	65	54.7	7.0	330	*
YP 331-68	68	57.7	7.0	331	*
YP 332-70	70	59.5	7.0	332	*
YP 333-75	75	64.5	7.0	333	*
YP 334-77	77	66.6	7.0	334	*
YP 335-80	80	69.6	7.0	335	*
YP 336-85	85	74.5	7.0	336	*
YP 337-86	86	75.5	7.0	337	*
YP 338-90	90	79.5	7.0	338	*
YP 339-92	92	81.5	7.0	339	*
YP 340-95	95	84.5	7.0	340	*
YP 341-100	100	89.6	7.0	341	*
YP 342-102	102	91.5	7.0	342	*
YP 343-105	105	94.5	7.0	343	*
YP 344-108	108	97.5	7.0	344	*
YP 345-111	111	100.6	7.0	345	*
YP 346-115	115	104.5	7.0	346	*
YP 347-118	118	107.5	7.0	347	*
YP 348-121	121	110.5	7.0	348	*
YP 349-125	125	114.5	7.0	349	*
YP 425-127	127	113.3	9.5	425	*
YP 426-130	130	116.3	9.5	426	*
YP 427-135	135	121.3	9.5	427	*
YP 428-137	137	123.3	9.5	428	*
YP 429-140	140	126.3	9.5	429	*


* a richiesta - on request



Codice - Part No.	D ^{H8}	d ^{H9}	L ^{+0.2}	OR	€uro
YP 430-143	143	129.3	9.5	430	*
YP 431-146	146	132.3	9.5	431	*
YP 432-150	150	136.3	9.5	432	*
YP 433-153	153	139.3	9.5	433	*
YP 434-156	156	142.3	9.5	434	*
YP 435-160	160	146.3	9.5	435	*
YP 436-162	162	148.3	9.5	436	*
YP 437-165	165	151.3	9.5	437	*
YP 438-172	172	158.3	9.5	438	*
YP 439-178	178	164.3	9.5	439	*
YP 440-184	184	170.3	9.5	440	*
YP 441-191	191	177.3	9.5	441	*
YP 442-197	197	183.3	9.5	442	*
YP 443-203	203	189.3	9.5	443	*
YP 444-210	210	196.3	9.5	444	*
YP 445-216	216	202.3	9.5	445	*
YP 674-222	222	208.3	9.5	674	*
YP 446-230	230	216.3	9.5	446	*
YP 676-235	235	221.3	9.5	676	*
YP 447-242	242	228.3	9.5	447	*
YP 678-250	250	236.3	9.5	678	*
YP 448-255	255	241.3	9.5	448	*
YP 680-260	260	246.3	9.5	680	*
YP 449-270	270	256.3	9.5	449	*
YP 682-275	275	261.3	9.5	682	*
YP 450-280	280	266.3	9.5	450	*
YP 684-286	286	272.3	9.5	684	*
YP 451-295	295	281.3	9.5	451	*
YP 686-300	300	286.3	9.5	686	*
YP 452-305	305	291.3	9.5	452	*
YP 688-315	315	301.3	9.5	688	*
YP 453-320	320	306.3	9.5	453	*
YP 454-330	330	316.3	9.5	454	*
YP 455-345	345	331.3	9.5	455	*
YP 456-355	355	341.3	9.5	456	*
YP 457-370	370	356.3	9.5	457	*
YP 458-380	380	366.3	9.5	458	*
YP 459-395	395	381.3	9.5	459	*
YP 460-410	410	396.3	9.5	460	*

* a richiesta - on request

YRB TENUTA ESTERNA PER ORGANI ROTANTI DOUBLE ACTING SEAL FOR ROTATING PISTON

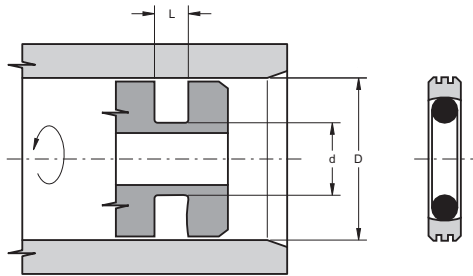

Codice - Part No.	D ^{H10}	d ^{H9}	L ^{+0.2}	OR	€uro
YRB 8 3.1 2.2	8	3.1	2.2	006	*
YRB 10 5.1 2.2	10	5.1	2.2	009	*
YRB 12 7.1 2.2	12	7.1	2.2	011	*
YRB 15 10.1 2.2	15	10.1	2.2	012	*
YRB 16 11.1 2.2	16	11.1	2.2	013	*
YRB 18 13.1 2.2	18	13.1	2.2	014	*
YRB 20 15.1 2.2	20	15.1	2.2	016	*
YRB 22 17.1 2.2	22	17.1	2.2	017	*
YRB 25 20.1 2.2	25	20.1	2.2	019	*
YRB 28 23.1 2.2	28	23.1	2.2	021	*
YRB 30 25.1 2.2	30	25.1	2.2	022	*
YRB 32 27.1 2.2	32	27.1	2.2	023	*
YRB 35 30.1 2.2	35	30.1	2.2	025	*
YRB 38 33.1 2.2	38	33.1	2.2	027	*
YRB 40 32.5 3.2	40	32.5	3.2	125	*
YRB 42 34.5 3.2	42	34.5	3.2	126	*
YRB 45 37.5 3.2	45	37.5	3.2	128	*
YRB 48 40.5 3.2	48	40.5	3.2	130	*
YRB 50 42.5 3.2	50	42.5	3.2	131	*
YRB 55 47.5 3.2	55	47.5	3.2	134	*
YRB 60 52.5 3.2	60	52.5	3.2	137	*
YRB 63 55.5 3.2	63	55.5	3.2	139	*
YRB 65 57.5 3.2	65	57.5	3.2	140	*
YRB 70 62.5 3.2	70	62.5	3.2	144	*


* a richiesta - on request

35



Codice - Part No.	D ^{H10}	d ^{H9}	L ^{+0.2}	OR	€uro
YRB 75 67.5 3.2	75	67.5	3.2	147	*
YRB 80 69 4.2	80	69.0	4.2	232	*
YRB 85 74 4.2	85	74.0	4.2	845	*
YRB 90 79 4.2	90	79.0	4.2	235	*
YRB 95 84 4.2	95	84.0	4.2	236	*
YRB 100 89 4.2	100	89.0	4.2	238	*
YRB 105 94 4.2	105	94.0	4.2	240	*
YRB 110 99 4.2	110	99.0	4.2	241	*
YRB 115 104 4.2	115	104.0	4.2	243	*
YRB 120 109 4.2	120	109.0	4.2	244	*
YRB 125 114 4.2	125	114.0	4.2	246	*
YRB 130 119 4.2	130	119.0	4.2	247	*
YRB 140 125.5 6.3	140	124.5	6.3	352	*
YRB 150 134.5 6.3	150	134.5	6.3	355	*
YRB 160 144.5 6.3	160	144.5	6.3	358	*
YRB 170 154.5 6.3	170	154.5	6.3	361	*
YRB 180 164.5 6.3	180	164.5	6.3	363	*
YRB 190 174.5 6.3	190	174.5	6.3	364	*
YRB 200 184.5 6.3	200	184.5	6.3	366	*
YRB 210 194.5 6.3	210	194.5	6.3	367	*
YRB 220 204.5 6.3	220	204.5	6.3	369	*
YRB 240 224.5 6.3	240	224.5	6.3	372	*
YRB 250 234.5 6.3	250	234.5	6.3	374	*
YRB 280 264.5 6.3	280	264.5	6.3	377	*
YRB 300 284.5 6.3	300	284.5	6.3	379	*

UP TENUTA STELO E PISTONE A LABBRI SIMMETRICI ROD AND PISTON SEAL WITH SYMMETRIC LIPS

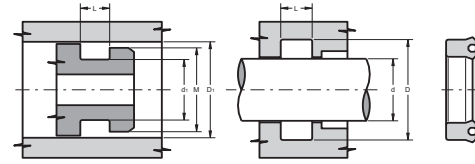

Codice - Part No.	d ₁ ^{H8} d ₁₇	D ₁ ^{H10} D ^{H10}	L +0.25	M	€uro
UP 3 8 4	3	8	4.0	5	0,67
UP 3 9 4.5	3	9	5.0	5	0,67
UP 4 10 4	4	10	4.5	6	0,74

* a richiesta - on request

36

Codice - Part No.	d ₁ ^{H8} d ₁₇	D ₁ ^{H10} D ^{H10}	L +0.25	M	€uro
UP 4 10 4.5	4	10	5.0	6	0,74
UP 5 12 5	5	12	5.5	7	0,77
UP 5 12 6	5	12	7.0	7	0,77
UP 5 17 9	5	17	10.0	11	0,80
UP 6 12 4	6	12	4.5	8	0,77
UP 6 12 5.2	6	12	5.7	8	0,77
UP 6 12 5.5	6	12	6.0	8	0,77
UP 6 12 6	6	12	7.0	8	0,77
UP 6 15 8	6	15	9.0	9	0,80
UP 7 14 3.5	7	14	4.2	9	0,80
UP 8 12 2.4	8	12	3.5	10	0,74
UP 8 14 6	8	14	7.0	10	0,80
UP 8 15 5.8	8	15	6.3	10	0,80
UP 8 15 8	8	15	9.0	10	0,80
UP 8 16 5.8	8	16	6.3	10	0,86
UP 8 18 9	8	18	10.0	11	0,95
UP 8.4 16 5.8	8.4	16	6.3	10	0,86
UP 10 16 4	10	16	4.5	12	0,92
UP 10 16 5.6	10	16	6.2	12	0,92
UP 10 16 6	10	16	7.0	12	0,92
UP 10 18 5	10	18	6.0	12	0,98
UP 10 18 6	10	18	7.0	12	0,98
UP 10 18 8	10	18	9.0	12	0,98
UP 10 20 8	10	20	9.0	12	1,03
UP 10 22 8	10	22	9.0	13	1,06
UP 12 18 6	12	18	7.0	14	1,06
UP 12 20 8	12	20	9.0	14	1,09
UP 12 22 5	12	22	6.0	15	1,06
UP 12 22 7	12	22	8.0	15	1,06
UP 12 22 8	12	22	9.0	15	1,06
UP 12 24 8	12	24	9.0	15	1,12
UP 14 20 4.8	14	20	5.3	16	1,01
UP 14 22 6	14	22	7.0	16	1,06
UP 14 24 8	14	24	9.0	16	1,15
UP 14 27 7	14	27	8.0	17	1,27
UP 15 25 8	15	25	9.0	18	1,15
UP 15 25 10	15	25	11.0	18	1,15
UP 16 22 4	16	22	4.5	18	1,06
UP 16 22 5	16	22	5.5	18	1,06
UP 16 24 5	16	24	6.0	18	1,15
UP 16 24 9	16	24	10.0	18	1,27
UP 16 26 5	16	26	6.0	19	1,27



Codice - Part No.	d ₁ ¹⁸ d ¹⁷	D ₁ ^{H10} D _{H10}	L +0.25	M	€uro
UP 16 26 8	16 26	26	9.0	19	1,27
UP 16 28 6	16 28	28	7.0	19	1,27
UP 17 25 10	17 25	25	11.0	19	1,27
UP 17 27 6.5	17 27	27	7.5	20	1,27
UP 18 25 5	18 25	25	5.5	20	1,27
UP 18 26 6.5	18 26	26	7.5	20	1,27
UP 18 26 8	18 26	26	9.0	20	1,27
UP 18 26 8.5	18 26	26	9.5	20	1,27
UP 18 28 8	18 28	28	9.0	21	1,27
UP 18 30 8	18 30	30	9.0	21	1,33
UP 19 25 6	19 25	25	7.0	21	1,12
UP 20 28 4	20 28	28	5.0	22	1,27
UP 20 28 5	20 28	28	5.5	22	1,27
UP 20 28 8	20 28	28	9.0	22	1,27
UP 20 29 5	20 29	29	5.5	22	1,30
UP 20 30 8	20 30	30	9.0	23	1,36
UP 20 30 10	20 30	30	11.0	23	1,42
UP 20 32 7.5	20 32	32	8.5	23	1,36
UP 20 40 10	20 40	40	11.0	24	1,60
UP 22 28 8	22 28	28	9.0	24	1,30
UP 22 30 6	22 30	30	7.0	24	1,36
UP 22 32 8	22 32	32	9.0	25	1,39
UP 22 32 10	22 32	32	11.0	25	1,42
UP 22 35 10	22 35	35	11.0	25	1,42
UP 22 40 10	22 40	40	11.0	25	1,60
UP 24 32 7	24 32	32	8.0	26	1,33
UP 24 34 5	24 34	34	5.5	27	1,42
UP 25 33 5	25 33	33	5.5	27	1,42
UP 25 35 5	25 35	35	5.5	28	1,42
UP 25 35 8	25 35	35	9.0	28	1,45
UP 25 35 10	25 35	35	11.0	28	1,48
UP 25 38 8	25 38	38	9.0	28	1,48
UP 25 38 10	25 38	38	11.0	28	1,48
UP 25 40 10	25 40	40	11.0	28	1,60
UP 28 35 4.7	28 35	35	5.5	30	1,39
UP 28 35 5.5	28 35	35	5.5	30	1,48
UP 28 36 6.5	28 36	36	7.5	30	1,48
UP 28 38 7	28 38	38	8.0	31	1,48
UP 28 38 8	28 38	38	9.0	31	1,48
UP 28 38 10	28 38	38	11.0	31	1,48
UP 28 40 10	28 40	40	11.0	31	1,54
UP 30 36 4	30 36	36	4.5	32	1,48

Codice - Part No.	d ₁ ¹⁸ d ¹⁷	D ₁ ^{H10} D _{H10}	L +0.25	M	€uro
UP 30 37 6	30 37	37	6.0	32	1,48
UP 30 38 6	30 38	38	6.5	32	1,48
UP 30 38 7	30 38	38	8.0	32	1,51
UP 30 40 5	30 40	40	5.5	33	1,54
UP 30 40 6	30 40	40	7.0	33	1,54
UP 30 40 10	30 40	40	11.0	33	1,60
UP 30 42 9	30 42	42	10.0	33	1,60
UP 30 42 10	30 42	42	11.0	33	1,60
UP 30 45 10	30 45	45	11.0	34	1,86
UP 30 50 10	30 50	50	11.0	34	2,10
UP 30 50 12	30 50	50	13.0	34	2,10
UP 32 40 5.5	32 40	40	6.0	34	1,60
UP 32 40 8	32 40	40	9.0	34	1,60
UP 32 42 10	32 42	42	11.0	35	1,60
UP 32 45 10	32 45	45	11.0	35	1,86
UP 34 45 7	34 45	45	8.0	37	1,80
UP 34 45 9	34 45	45	10.0	37	1,80
UP 35 43 6	35 43	43	7.0	37	1,77
UP 35 45 6	35 45	45	7.0	38	1,86
UP 35 45 7	35 45	45	8.0	38	1,86
UP 35 45 8	35 45	45	9.0	38	1,86
UP 35 45 10	35 45	45	11.0	38	1,95
UP 35 48 10	35 48	48	11.0	38	1,98
UP 35 50 10	35 50	50	11.0	39	2,07
UP 35 55 10	35 55	55	11.0	39	2,13
UP 36 46 7	36 46	46	8.0	39	1,86
UP 38 45 5	38 45	45	5.5	40	1,86
UP 38 46 6.5	38 46	46	7.5	40	1,98
UP 38 50 9	38 50	50	10.0	41	2,04
UP 38 55 10	38 55	55	11.0	41	2,13
UP 38 58 10	38 58	58	11.0	42	2,71
UP 40 50 5	40 50	50	5.5	43	2,04
UP 40 50 6	40 50	50	7.0	43	2,04
UP 40 50 6.5	40 50	50	7.5	43	2,04
UP 40 50 8	40 50	50	9.0	43	2,04
UP 40 50 10	40 50	50	11.0	43	2,04
UP 40 55 10	40 55	55	11.0	44	2,10
UP 40 60 10	40 60	60	11.0	45	2,22
UP 40 60 13	40 60	60	14.0	45	2,22
UP 42 50 6	42 50	50	7.0	44	2,04
UP 42 50 8	42 50	50	9.0	44	2,04
UP 42 52 9	42 52	52	10.0	45	2,04

Codice - Part No.	d ₁ ¹⁸ d ¹⁷	D ₁ ^{H10} D _{H10}	L +0.25	M	€uro
UP 42 62 12	42 62	62	13.0	47	2,25
UP 45 53 6.5	45 53	53	7.5	48	2,04
UP 45 55 6	45 55	55	7.0	48	2,10
UP 45 55 6.5	45 55	55	7.5	48	2,10
UP 45 55 10	45 55	55	11.0	48	2,10
UP 45 56 7	45 56	56	8.0	48	2,10
UP 45 60 10	45 60	60	11.0	49	2,19
UP 45 63 10	45 63	63	11.0	49	2,22
UP 45 65 10	45 65	65	11.0	50	2,25
UP 45 65 12	45 65	65	13.0	50	2,25
UP 48 58 10	48 58	58	11.0	51	2,13
UP 50 60 6	50 60	60	7.0	53	2,19
UP 50 60 10	50 60	60	11.0	53	2,19
UP 50 60 11	50 60	60	12.0	53	2,19
UP 50 62 9	50 62	62	10.0	53	2,22
UP 50 63 6	50 63	63	7.0	54	2,22
UP 50 65 10	50 65	65	11.0	54	2,25
UP 50 70 10	50 70	70	11.0	55	2,36
UP 50 70 12	50 70	70	13.0	55	2,36
UP 52 62 12	52 62	62	13.0	55	2,31
UP 53 63 6.5	53 63	63	7.5	56	2,22
UP 55 65 6	55 65	65	7.0	58	2,25
UP 55 65 10	55 65	65	11.0	58	2,25
UP 55 65 12	55 65	65	13.0	58	2,25
UP 55 70 12	55 70	70	13.0	59	2,34
UP 55 75 12	55 75	75	13.0	60	2,39
UP 56 66 5	56 66	66	5.5	59	2,19
UP 60 70 5	60 70	70	5.5	63	2,34
UP 60 70 6	60 70	70	7.0	63	2,34
UP 60 70 8	60 70	70	9.0	63	2,25
UP 60 70 10	60 70	70	11.0	63	2,31
UP 60 70 12	60 70	70	13.0	63	2,34
UP 60 75 10	60 75	75	11.0	64	2,39
UP 60 75 12	60 75	75	13.0	64	2,45
UP 60 80 10	60 80	80	11.0	65	2,66
UP 60 80 12	60 80	80	13.0	65	2,66
UP 63 73 6	63 73	73	7.0	66	2,36
UP 63 75 10	63 75	75	11.0	66	2,39
UP 63 78 10	63 78	78	11.0	67	2,54
UP 65 75 6	65 75	75	7.0	68	2,39
UP 65 75 12	65 75	75	13.0	68	2,39
UP 65 80 10	65 80	80	11.0	69	2,57




Codice - Part No.	d ₁ ¹⁸ d ¹⁷	D ₁ ^{H10} D _{H10}	L +0.25	M	€uro
UP 65 80 12	65 80	80	13.0	69	2,57
UP 65 85 12	65 85	85	13.0	70	2,66
UP 67 77 10	67 77	77	11.0	70	2,54
UP 70 80 5	70 80	80	6.0	73	2,54
UP 70 80 6	70 80	80	7.0	73	2,54
UP 70 80 8	70 80	80	9.0	73	2,54
UP 70 80 10	70 80	80	11.0	73	2,54
UP 70 80 12	70 80	80	13.0	73	2,57
UP 70 85 11	70 85	85	12.0	74	2,66
UP 70 85 12	70 85	85	13.0	74	2,66
UP 70 90 12	70 90	90	13.0	75	2,69
UP 75 85 6	75 85	85	7.0	78	2,57
UP 75 85 12	75 85	85	13.0	78	2,66
UP 75 90 7.5	75 90	90	8.5	79	2,66
UP 75 90 10	75 90	90	11.0	79	2,69
UP 75 90 12	75 90	90	13.0	79	2,69
UP 75 95 12	75 95	95	13.0	80	2,75
UP 75 95 14.5	75 95	95	15.5	80	2,75
UP 80 90 5	80 90	90	6.0	83	2,69
UP 80 90 6	80 90	90	7.0	83	2,69
UP 80 90 8	80 90	90	9.0	83	2,69
UP 80 90 10	80 90	90	11.0	83	2,69
UP 80 90 12	80 90	90	13.0	83	2,69
UP 80 95 12	80 95	95	13.0	84	2,72
UP 80 100 9.5	80 100	100	10.5	85	2,75
UP 80 100 12	80 100	100	13.0	85	2,75
UP 85 95 8.5	85 95	95	9.5	88	2,75
UP 85 95 12	85 95	95	13.0	88	2,75
UP 85 100 9	85 100	100	10.0	89	2,78
UP 85 100 10	85 100	100	11.0	89	2,78
UP 85 100 12	85 100	100	13.0	89	2,78
UP 85 105 12	85 105	105	13.0	90	2,87
UP 90 100 8	90 100	100	9.0	93	2,75
UP 90 100 12	90 100	100	13.0	93	2,84
UP 90 105 12	90 105	105	13.0	94	2,93
UP 90 110 12	90 110	110	13.0	95	3,04
UP 90 115 12	90 115	115	13.0	95	3,50
UP 95 110 12	95 110	110	13.0	99	2,93
UP 95 115 12	95 115	115	13.0	100	3,13
UP 100 115 12	100 115	115	13.0	104	3,13
UP 100 120 12	100 120	120	13.0	105	3,40
UP 100 125 12	100 125	125	13.0	105	3,72



Codice - Part No.	d ₁ ¹⁸ d ¹⁷	D ₁ ^{H10} D _{H10}	L +0.25	M	€uro
UP 100 125 15	100	125	16.0	105	3,72
UP 105 120 15	105	120	16.0	109	3,49
UP 105 125 12	105	125	13.0	110	3,64
UP 105 125 15	105	125	16.0	110	3,64
UP 110 125 9	110	125	10.0	114	3,52
UP 110 125 12	110	125	13.0	114	3,64
UP 110 125 15	110	125	16.0	114	3,64
UP 110 130 15	110	130	16.0	115	3,67
UP 115 135 15	115	135	16.0	118	3,93
UP 120 140 15	120	140	16.0	125	4,20
UP 125 140 9	125	140	10.0	129	4,14
UP 125 140 11	125	140	12.0	129	4,14
UP 125 140 15	125	140	16.0	129	4,14
UP 125 145 15	125	145	16.0	130	4,32
UP 130 150 15	130	150	16.0	135	4,94
UP 140 160 12	140	160	13.0	145	5,26
UP 140 160 15	140	160	16.0	145	5,27
UP 145 165 15	145	165	16.0	150	5,38
UP 150 170 15	150	170	16.0	155	6,39
UP 160 180 15	160	180	16.0	165	6,62
UP 170 190 15	170	190	16.0	175	7,63
UP 175 200 15	175	200	16.0	180	11,00
UP 180 200 15	180	200	16.0	185	9,64
UP 190 210 15	190	210	16.0	195	10,44
UP 200 220 12	200	220	13.0	205	11,17
UP 200 225 18	200	225	19.0	206	12,92
UP 220 250 18	220	250	19.0	225	18,36

Misure in pollici - Inch sizes

UP 2125 2625 0406	53.90	66.75	11.00	58	2,25
UP 2250 2625 0375	57.15	66.68	10.50	60.3	2,25
UP 2500 3250 0620	63.50	82.55	16.75	68.5	2,66
UP 2625 3000 0187	66.68	76.20	5.25	69.9	1,80
UP 3000 3750 0620	76.20	95.25	16.75	81	4,43
UP 3500 3875 0375	88.90	98.43	10.50	92	2,47
UP 3875 4250 0187	98.43	107.95	5.25	101.6	1,62
UP 5250 6000 0620	133.36	152.40	16.75	138	5,58
UP 6250 7000 0620	158.75	177.80	16.75	163.7	6,62
UP 6500 7500 0765	165.10	190.50	20.40	170	9,87
UP 7000 8000 0750	177.80	203.20	20.10	184	11,38

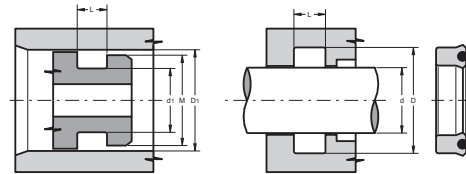UPN TENUTA STELO E PISTONE
 CON ELEMENTO ENERGIZZANTE
 ROD AND PISTON SEAL WITH ENERGIZER


Codice - Part No.	d ₁ ¹⁸ d ¹⁷	D ₁ ^{H10} D _{H10}	L +0.25	M	€uro
UPN 5 17 9	5	17	10.0	11	1,08
UPN 8 18 9	8	18	10.0	11	1,25
UPN 10 18 5	10	18	6.0	12	1,28
UPN 10 20 8	10	20	9.0	12	1,34
UPN 10 22 8	10	22	9.0	13	1,36
UPN 12 22 5	12	22	6.0	15	1,36
UPN 12 22 7	12	22	8.0	15	1,36
UPN 12 22 8	12	22	9.0	15	1,36
UPN 12 24 8	12	24	9.0	15	1,42
UPN 14 24 8	14	24	9.0	16	1,47
UPN 14 27 7	14	27	8.0	16	1,60
UPN 15 25 8	15	25	9.0	18	1,47
UPN 15 25 10	15	25	11.0	18	1,47
UPN 16 26 5	16	26	6.0	19	1,59
UPN 16 26 8	16	26	9.0	19	1,59
UPN 16 28 6	16	28	7.0	19	1,59
UPN 17 27 6.5	17	27	7.5	19	1,59
UPN 18 28 8	18	28	9.0	21	1,59
UPN 18 30 8	18	30	9.0	21	1,65
UPN 20 29 5	20	29	5.5	22	1,62
UPN 20 30 8	20	30	9.0	23	1,68
UPN 20 30 10	20	30	11.0	23	1,74
UPN 20 32 7.5	20	32	8.5	23	1,70
UPN 20 40 10	20	40	11.0	24	1,94
UPN 22 32 8	22	32	9.0	25	1,73
UPN 22 32 10	22	32	11.0	25	1,76
UPN 22 35 10	22	35	11.0	25	1,77
UPN 22 40 10	22	40	11.0	25	1,94
UPN 25 35 5	25	35	5.5	28	1,77
UPN 25 35 8	25	35	9.0	28	1,80

39



Codice - Part No.	d ₁ ¹⁸ d ¹⁷	D ₁ ^{H10} D _{H10}	L +0.25	M	€uro
UPN 25 35 10	25	35	11.0	28	1,83
UPN 25 38 8	25	38	9.0	28	1,83
UPN 25 38 10	25	38	11.0	28	1,83
UPN 25 40 10	25	40	11.0	28	1,95
UPN 28 38 7	28	38	8.0	31	1,83
UPN 28 38 8	28	38	9.0	31	1,83
UPN 28 38 10	28	38	11.0	31	1,83
UPN 28 40 10	28	40	11.0	31	1,89
UPN 30 40 5	30	40	5.5	33	1,89
UPN 30 40 6	30	40	7.0	33	1,89
UPN 30 40 10	30	40	11.0	33	1,95
UPN 30 42 9	30	42	10.0	33	1,96
UPN 30 42 10	30	42	11.0	33	1,96
UPN 30 45 10	30	45	11.0	34	2,22
UPN 30 50 10	30	50	11.0	34	2,47
UPN 30 50 12	30	50	13.0	34	2,47
UPN 32 40 5.5	32	40	6.0	34	1,96
UPN 32 40 8	32	40	9.0	34	1,96
UPN 32 42 10	32	42	11.0	35	1,96
UPN 32 45 10	32	45	11.0	35	2,23
UPN 34 45 7	34	45	8.0	37	2,22
UPN 34 45 9	34	45	10.0	37	2,22
UPN 35 43 6	35	43	7.0	37	0,83
UPN 35 45 6	35	45	7.0	38	2,28
UPN 35 45 7	35	45	8.0	38	2,28
UPN 35 45 8	35	45	9.0	38	2,28
UPN 35 45 10	35	45	11.0	38	2,36
UPN 35 48 10	35	48	11.0	38	2,35
UPN 35 50 10	35	50	11.0	39	2,44
UPN 35 55 10	35	55	11.0	39	2,54
UPN 36 46 7	36	46	8.0	39	2,23
UPN 38 46 6.5	38	46	7.5	40	2,41
UPN 38 50 9	38	50	10.0	41	2,46
UPN 38 55 10	38	55	11.0	41	2,54
UPN 38 58 10	38	58	11.0	42	0,83
UPN 40 50 5	40	50	5.5	43	2,48
UPN 40 50 6	40	50	7.0	43	2,48
UPN 40 50 6.5	40	50	7.5	43	2,48
UPN 40 50 8	40	50	9.0	43	2,48
UPN 40 50 10	40	50	11.0	43	2,48
UPN 40 55 10	40	55	11.0	44	2,51
UPN 40 60 10	40	60	11.0	45	2,65
UPN 40 60 13	40	60	14.0	45	2,65

40

Codice - Part No.	d ₁ ¹⁸ d ¹⁷	D ₁ ^{H10} D _{H10}	L +0.25	M	€uro
UPN 42 50 6	42	50	7.0	44	2,48
UPN 42 50 8	42	50	9.0	44	2,48
UPN 42 52 9	42	52	10.0	45	2,48
UPN 42 62 12	42	62	13.0	47	2,68
UPN 45 53 6.5	45	53	7.5	48	2,53
UPN 45 55 6	45	55	7.0	48	2,59
UPN 45 55 6.5	45	55	7.5	48	2,59
UPN 45 55 10	45	55	11.0	48	2,59
UPN 45 56 7	45	56	8.0	48	2,59
UPN 45 60 10	45	60	11.0	49	2,62
UPN 45 63 10	45	63	11.0	49	2,65
UPN 45 65 10	45	65	11.0	50	2,68
UPN 45 65 12	45	65	13.0	50	2,68
UPN 48 58 10	48	58	11.0	51	2,62
UPN 50 60 6	50	60	7.0	53	2,68
UPN 50 60 10	50	60	11.0	53	2,68
UPN 50 60 11	50	60	12.0	53	2,65
UPN 50 62 9	50	62	10.0	53	2,71
UPN 50 63 6	50	63	7.0	54	2,71
UPN 50 65 10	50	65	11.0	54	2,72
UPN 50 70 10	50	70	11.0	55	2,87
UPN 50 70 12	50	70	13.0	55	2,87
UPN 52 62 12	52	62	13.0	55	0,83
UPN 53 63 6.5	53	63	7.5	56	2,71
UPN 55 65 6	55	65	7.0	58	2,74
UPN 55 65 10	55	65	11.0	58	2,74
UPN 55 65 12	55	65	13.0	58	2,74
UPN 55 70 12	55	70	13.0	59	2,84
UPN 55 75 12	55	75	13.0	60	2,91
UPN 56 66 5	56	66	5.5	59	2,69
UPN 60 70 5	60	70	5.5	63	2,84
UPN 60 70 6	60	70	7.0	63	2,84
UPN 60 70 8	60	70	9.0	63	2,75
UPN 60 70 10	60	70	11.0	63	2,81
UPN 60 70 12	60	70	13.0	63	2,84
UPN 60 75 10	60	75	11.0	64	2,91
UPN 60 75 12	60	75	13.0	64	2,97
UPN 60 80 10	60	80	11.0	65	3,19
UPN 60 80 12	60	80	13.0	65	3,19
UPN 63 73 6	63	73	7.0	66	2,92
UPN 63 75 10	63	75	11.0	66	2,95
UPN 63 78 10	63	78	11.0	67	3,10
UPN 65 75 6	65	75	7.0	68	2,95



Codice - Part No.	d _i ¹⁸ d ¹⁷	D _i ^{H10} D ^{H10}	L ^{+0,25}	M	€uro
UPN 65 75 12	65	75	13.0	68	2,95
UPN 65 80 10	65	80	11.0	69	3,13
UPN 65 80 12	65	80	13.0	69	3,13
UPN 65 85 12	65	85	13.0	70	3,24
UPN 67 77 10	67	77	11.0	70	3,13
UPN 70 80 5	70	80	6.0	73	3,13
UPN 70 80 6	70	80	7.0	73	3,13
UPN 70 80 8	70	80	9.0	73	3,13
UPN 70 80 10	70	80	11.0	73	3,13
UPN 70 80 12	70	80	13.0	73	3,16
UPN 70 85 11	70	85	12.0	74	3,26
UPN 70 85 12	70	85	13.0	74	3,26
UPN 70 90 12	70	90	13.0	75	3,27
UPN 75 85 6	75	85	7.0	78	3,16
UPN 75 85 12	75	85	13.0	78	3,25
UPN 75 90 7.5	75	90	8.5	79	3,26
UPN 75 90 10	75	90	11.0	79	3,29
UPN 75 90 12	75	90	13.0	79	3,29
UPN 75 95 12	75	95	13.0	80	3,42
UPN 75 95 14.5	75	95	15.5	80	3,42
UPN 80 90 5	80	90	6.0	83	3,29
UPN 80 90 6	80	90	7.0	83	3,29
UPN 80 90 8	80	90	9.0	83	3,29
UPN 80 90 10	80	90	11.0	83	3,29
UPN 80 90 12	80	90	13.0	83	3,29
UPN 80 95 12	80	95	13.0	84	3,36
UPN 80 100 9.5	80	100	10.5	85	3,42
UPN 80 100 12	80	100	13.0	85	3,42
UPN 85 95 8.5	85	95	9.5	88	3,35
UPN 85 95 12	85	95	13.0	88	3,35
UPN 85 100 9	85	100	10.0	89	3,46
UPN 85 100 10	85	100	11.0	89	0,83
UPN 85 100 12	85	100	13.0	89	3,46
UPN 85 105 12	85	105	13.0	90	3,61
UPN 90 100 8	90	100	9.0	93	3,43
UPN 90 100 12	90	100	13.0	93	3,52
UPN 90 105 12	90	105	13.0	94	3,65
UPN 90 110 12	90	110	13.0	95	3,78
UPN 90 115 12	90	115	13.0	95	4,49
UPN 95 110 12	95	110	13.0	99	3,79
UPN 95 115 12	95	115	13.0	100	3,96
UPN 100 115 12	100	115	13.0	104	4,00
UPN 100 120 12	100	120	13.0	105	4,26

Codice - Part No.	d _i ¹⁸ d ¹⁷	D _i ^{H10} D ^{H10}	L ^{+0,25}	M	€uro
UPN 100 125 12	100	125	13.0	105	4,59
UPN 100 125 15	100	125	16.0	105	4,59
UPN 105 120 15	105	120	16.0	109	4,51
UPN 105 125 12	105	125	13.0	110	4,50
UPN 105 125 15	105	125	16.0	110	4,50
UPN 110 125 9	110	125	10.0	114	4,54
UPN 110 125 12	110	125	13.0	114	4,66
UPN 110 125 15	110	125	16.0	114	4,66
UPN 110 130 15	110	130	16.0	115	4,60
UPN 115 135 15	115	135	16.0	118	4,95
UPN 120 140 15	120	140	16.0	125	5,22
UPN 125 140 9	125	140	10.0	129	5,29
UPN 125 140 11	125	140	12.0	129	5,27
UPN 125 140 15	125	140	16.0	129	5,27
UPN 125 145 15	125	145	16.0	130	5,45
UPN 130 150 15	130	150	16.0	135	6,14
UPN 140 160 12	140	160	13.0	145	6,62
UPN 140 160 15	140	160	16.0	145	6,54
UPN 145 165 15	145	165	16.0	150	6,73
UPN 150 170 15	150	170	16.0	155	7,74
UPN 160 180 15	160	180	16.0	165	8,05
UPN 170 190 15	170	190	16.0	175	9,31
UPN 175 200 15	175	200	16.0	180	12,68
UPN 180 200 15	180	200	16.0	185	11,32
UPN 190 210 15	190	210	16.0	195	0,83
UPN 200 220 12	200	220	13.0	205	13,00
UPN 200 225 18	200	225	19.0	206	15,15
UPN 220 250 18	220	250	19.0	225	21,09


Misure in pollici - Inch sizes

UPN 2125 2625 0406	53.90	66.75	11.00	58	2,75
UPN 2250 2625 0375	57.15	66.68	10.50	60.3	2,75
UPN 2500 3250 0620	63.50	82.55	16.75	68.5	3,32
UPN 2625 3000 0187	66.68	76.20	5.25	69.9	2,36
UPN 3000 3750 0620	76.20	95.25	16.75	81	5,17
UPN 3500 3875 0375	88.90	98.43	10.50	92	3,06
UPN 3875 4250 0187	98.43	107.95	5.25	101.6	2,30
UPN 5250 6000 0620	133.36	152.40	16.75	138	6,93
UPN 6250 7000 0620	158.75	177.80	16.75	163.7	8,00
UPN 6500 7500 0765	165.10	190.50	20.40	170	13,27
UPN 7000 8000 0750	177.80	203.20	20.10	184	13,75



OP TENUTA STELO-PISTONE ROD AND PISTON SEAL

per sedi standard O-Ring - for standard O-Ring housing

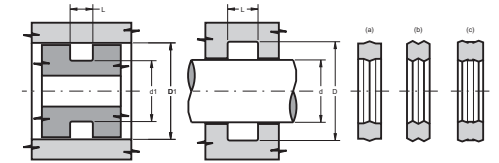


Codice - Part No.	d ¹⁷	D ^{H9}	d _i ^{H9}	D _i ^{H8}	L ^{+0,2}	Tipo-Type	€uro
OP 009	5	8.1	5.9	9	2.5	(a)	0,57
OP 012	9	12.1	9.9	13	2.5	(a)	0,58
OP 013	11	14.1	10.9	14	2.5	(a)	0,58
OP 014	13	16.1	12.9	16	2.5	(a)	0,58
OP 014/A	-	-	13.07	15.93	3.5	(b)	1,08
OP 015	14	17.1	14.9	18	2.5	(a)	0,59
OP 015/A	-	-	14.67	17.53	3.5	(b)	1,09
OP 016	16	19.1	15.9	19	2.5	(a)	0,59
OP 016/A	-	-	16.25	19.12	3.5	(b)	1,10
OP 031	44	47.1	44.9	48	2.5	(a)	0,76
OP 034	54	57.1	54.9	58	2.5	(a)	0,77
OP 109	8	12.5	8.5	13	3.5	(b)	1,04
OP 113	14	18.5	14.5	19	3.5	(b)	1,09
OP 115	17	21.5	17.5	22	3.5	(b)	1,12
OP 116/A	19	23.6	-	-	5.5	(b)	1,20
OP 117	20	24.5	20.5	25	3.5	(b)	1,14
OP 119	24	28.5	24.5	29	3.5	(b)	1,17
OP 121	28	31.5	27.5	32	3.5	(b)	1,21
OP 123	30	34.5	30.5	35	3.5	(b)	1,22
OP 126	35	39.5	35.5	40	3.5	(b)	1,26
OP 132	44	48.5	44.5	49	3.5	(b)	1,34
OP 133	46	50.5	46.5	51	3.5	(b)	1,35
OP 147	68	72.5	68.5	73	3.5	(b)	1,53
OP 153	89	93.5	89.5	94	3.5	(b)	2,59
OP 156	108	112.5	108.5	113	3.5	(b)	2,69
OP 209	17	23.2	17.8	24	4.5	(b)	1,16
OP 210	19	25.2	19.8	26	4.5	(b)	1,17
OP 216	28	34.2	28.8	35	4.5	(b)	1,27
OP 216/A	28	34.3	-	-	6.5	(b)	1,34
OP 217	30	36.2	30.8	37	4.5	(b)	1,29
OP 217/A	30	36.3	-	-	6.5	(b)	1,36
OP 218	31	37.2	31.8	38	4.5	(b)	1,30
OP 219	33	39.2	33.8	40	4.5	(b)	1,32
OP 225/829	48	54.2	47.8	54	4.5	(b)	1,46
OP 227/833	54	60.2	54.8	61	4.5	(b)	1,52
OP 230	64	70.2	63.8	70	4.5	(b)	1,62

Codice - Part No.	d ^{f7}	D ^{H9}	d ₁ ^{H9}	D ₁ ^{H8}	L ^{+0.2}	Tipo-Type	€uro
OP 233	73	79.2	73.8	80	4.5	(b)	1,71
OP 236	82	88.2	82.8	89	4.5	(b)	1,80
OP 239	92	98.2	92.8	99	4.5	(b)	2,79
OP 247	117	123.2	117.8	124	4.5	(b)	3,23
OP 337/A	76	85.4	76.6	86	9.5	(c)	2,41
OP 342/A	92	101.4	92.6	102	9.5	(c)	3,62
OP 349/A	114	123.4	115.6	125	9.5	(c)	4,06
OP 430	130	142.2	130.8	143	9.5	(c)	5,12
OP 614	12	16.8	-	-	3.5	(b)	1,08
OP 616	15	19.5	15.5	20	3.5	(b)	1,10
OP 617	18	22.8	-	-	3.5	(b)	1,13
OP 620	80	89.4	80.6	90	7.0	(c)	2,30
OP 621	90	99.4	90.6	100	7.0	(c)	3,31
OP 623/A	110	119.4	110.6	120	9.5	(c)	3,98
OP 806	11	14.1	11.9	15	2.5	(a)	0,58
OP 826	43	49.2	43.8	50	4.5	(b)	1,41
OP 832	52	58.2	53.8	60	4.5	(b)	1,50
OP 834	56	62.2	55.8	62	4.5	(b)	1,54
OP 835	57	63.2	57.8	64	4.5	(b)	1,55
OP 836	59	65.2	58.8	65	4.5	(b)	1,57
OP 839	64	70.2	63.8	70	4.5	(b)	1,62
OP 845	73	79.2	73.8	80	4.5	(b)	1,71

misure metriche - metric sizes

Codice - Part No.	d ^{f7}	D ^{H8}	L ^{+0.2}	Tipo-Type	€uro
OP 16 30 10	16	30	11.0	(b)	1,59
OP 26.6 35 5.5	26.6	35	6.5	(b)	1,39
OP 27.5 33.6 4	27.5	33.6	4.5	(b)	1,27
OP 34.6 40.7 4	34.6	40.7	4.5	(b)	1,29
OP 35.1 41 5.5	35.1	41	6.5	(b)	1,32
OP 44.6 50 5.2	44.6	50	6.2	(b)	1,37
OP 101.4 110 8	101.4	110	9.0	(c)	3,61
OP 101.7 111 7.5	101.7	111	8.5	(c)	3,49
OP 105 111 5.5	105	111	6.5	(b)	3,07
OP 106.7 116 7.5	106.7	116	8.5	(c)	3,76
OP 110 116 5.5	110	116	6.5	(b)	3,00
OP 132.8 145 8.5	132.8	145	9.5	(c)	4,89
OP 145 151 5	145	151	6.0	(c)	3,52
OP 165 171 5	165	171	6.0	(c)	5,53
OP 185 191 5	185	191	6.0	(c)	5,94
OP 207 213 5	207	213	6.0	(c)	8,64
OP 233.5 240.5 8	233.5	240.5	9.0	(c)	9,75
OP 262 272 8.5	262	272	9.5	(c)	11,33
OP 293 303 8.5	293	303	9.5	(c)	11,77

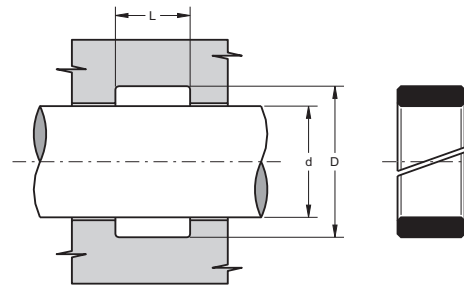
FI ANELLO GUIDA STELO
ROD GUIDE RING


Codice - Part No.	d ^{f7}	D ^{+0.05}	L ^{+0.25}	€uro
FI 12	12	16	9.6	0,41
FI 14	14	18	9.6	0,41
FI 15	15	19	9.6	0,47
FI 16	16	20	9.6	0,47
FI 18	18	22	9.6	0,47
FI 20	20	24	9.6	0,50
FI 20 26 9.6	20	26	9.6	0,50
FI 22	22	26	9.6	0,50
FI 25	25	29	9.6	0,50
FI 25 31 9.6	25	31	9.6	0,50
FI 26	26	30	9.6	0,50
FI 28	28	32	9.6	0,50
FI 28 31 5.6	28	31	5.6	0,50
FI 30	30	34	9.6	0,50
FI 30 36 9.6	30	36	9.6	0,56
FI 32	32	36	9.6	0,56
FI 32 35.1 4	32	35.1	4.0	0,56
FI 32 38 10	32	38	10.0	0,56
FI 34	34	38	9.6	0,56
FI 35	35	39	9.6	0,56
FI 35 39 12.8	35	39	12.8	0,56
FI 35 41 9.6	35	41	9.6	0,56
FI 36	36	40	9.6	0,56
FI 36 42 9.6	36	42	9.6	0,56

Codice - Part No.	d ^{f7}	D ^{+0.05}	L ^{+0.25}	€uro
FI 38	38	42	9.6	0,56
FI 40	40	44	9.6	0,56
FI 40 46 9.6	40	46	9.6	0,56
FI 42	42	46	9.6	0,56
FI 45	45	51	9.6	0,56
FI 45 51 12.8	45	51	12.8	0,56
FI 46	46	52	9.6	0,56
FI 48	48	54	9.6	0,56
FI 50	50	56	9.6	0,59
FI 50 56 12.8	50	56	12.8	0,59
FI 52	52	58	9.6	0,59
FI 53	53	59	9.6	0,59
FI 55	55	61	9.6	0,59
FI 55 61 12.8	55	61	12.8	0,59
FI 56	56	62	12.8	0,62
FI 60	60	66	12.8	0,65
FI 63	63	69	12.8	0,65
FI 65	65	71	12.8	0,65
FI 66	66	72	12.8	0,65
FI 70	70	76	12.8	0,74
FI 72	72	78	12.8	0,74
FI 73	73	79	12.8	0,74
FI 75	75	81	12.8	0,77
FI 76	76	82	12.8	0,77
FI 76.2 82.55 12.8	76.2	82.55	12.8	0,77
FI 78	78	84	12.8	0,77
FI 80	80	86	12.8	0,77
FI 80 86 19.2	80	86	19.2	0,85
FI 85	85	91	12.8	0,89
FI 86	86	92	12.8	0,89
FI 90	90	96	12.8	1,01
FI 90 96 19.2	90	96	19.2	1,11
FI 95	95	101	12.8	1,03
FI 100	100	106	12.8	1,06
FI 105	105	111	12.8	1,09
FI 110	110	116	12.8	1,12
FI 115	115	121	12.8	1,15
FI 120	120	126	12.8	1,18
FI 120 126 19.2	120	126	19.2	1,30
FI 120 126 25.4	120	126	25.4	1,36

Codice - Part No.	d ¹⁷	D ^{+0.05}	L ^{+0.25}	€uro
FI 123	123	129	12.8	1,18
FI 125	125	131	12.8	1,18
FI 130	130	136	12.8	1,21
FI 130 136 25.4	130	136	25.4	1,33
FI 135	135	141	12.8	1,24
FI 140	140	146	12.8	1,30
FI 143	143	149	12.8	1,48
FI 145	145	151	12.8	1,60
FI 150	150	156	12.8	1,77
FI 150 156 19.2	150	156	19.2	1,77
FI 154	154	160	19.2	1,95
FI 155	155	161	19.2	1,95
FI 160	160	166	19.2	2,19
FI 165	165	171	19.2	2,22
FI 170	170	176	19.2	2,31
FI 175	175	181	19.2	2,31
FI 180	180	186	19.2	2,36
FI 185	185	191	19.2	2,54
FI 190	190	196	19.2	2,60
FI 195	195	201	19.2	2,63
FI 200	200	206	19.2	2,66
FI 205	205	211	19.2	2,72
FI 210	210	216	19.2	2,78
FI 215	215	221	19.2	2,84
FI 220	220	226	19.2	2,96
FI 225	225	231	19.2	3,25
FI 230	230	236	19.2	3,49
FI 235	235	241	19.2	3,75
FI 240	240	246	19.2	3,99
FI 245	245	251	19.2	4,26
FI 250	250	256	19.2	4,43
FI 255	255	261	19.2	4,51
FI 260	260	266	19.2	4,58
FI 265	265	271	19.2	4,64
FI 270	270	276	19.2	4,70
FI 275	275	281	19.2	4,79
FI 280	280	286	19.2	4,88
FI 285	285	291	19.2	4,91
FI 290	290	296	19.2	4,94
FI 295	295	301	19.2	5,04

FE ANELLO GUIDA PISTONE PISTON GUIDE RING

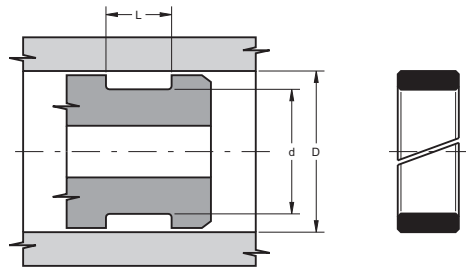

Codice - Part No.	D ^{H8}	d ^{-0.05}	L ^{+0.25}	€uro
FE 16	16	12	9.6	0,41
FE 18	18	14	9.6	0,41
FE 20	20	16	9.6	0,47
FE 22	22	18	9.6	0,47
FE 24	24	20	9.6	0,50
FE 25	25	21	9.6	0,50
FE 25 19 9.6	25	19	9.6	0,50
FE 25 21 8.2	25	21	8.2	0,50
FE 26	26	22	9.6	0,50
FE 28	28	24	9.6	0,50
FE 30	30	26	9.6	0,50
FE 32	32	28	9.6	0,50
FE 34	34	30	9.6	0,50
FE 35	35	31	9.6	0,50
FE 36	36	32	9.6	0,56
FE 40	40	36	9.6	0,56
FE 40 34 9.6	40	34	9.6	0,56
FE 42	42	38	9.6	0,53
FE 45	45	41	9.6	0,56
FE 46	46	42	9.6	0,56
FE 48	48	42	9.6	0,56
FE 49	49	43	9.6	0,56
FE 50	50	44	9.6	0,56
FE 50.8 44.45 12.7	50.80	44.45	12.7	0,56


45

Codice - Part No.	D ^{H8}	d ^{-0.05}	L ^{+0.25}	€uro
FE 55	55	49	12.8	0,56
FE 55 49 9.6	55	49	9.6	0,56
FE 56	56	50	12.8	0,56
FE 57.16 50.25 6.1	57.16	50.25	6.1	0,56
FE 60	60	54	12.8	0,56
FE 60 54 9.6	60	54	9.6	0,56
FE 63	63	57	12.8	0,62
FE 63 57 10	63	57	10.0	0,62
FE 63.5 57.15 12.7	63.50	57.15	12.7	0,62
FE 65	65	59	12.8	0,62
FE 70	70	64	12.8	0,65
FE 74	74	68	12.8	0,74
FE 75	75	69	12.8	0,74
FE 80	80	74	12.8	0,74
FE 85	85	79	12.8	0,77
FE 90	90	84	12.8	0,89
FE 90 84 10/S	90	84	10.0	0,89
FE 94	94	88	12.8	1,01
FE 95	95	89	12.8	1,01
FE 96	96	90	12.8	1,01
FE 100	100	94	12.8	1,03
FE 105	105	99	12.8	1,06
FE 110	110	104	12.8	1,09
FE 115	115	109	12.8	1,12
FE 120	120	114	12.8	1,15
FE 125	125	119	12.8	1,18
FE 126	126	120	12.8	1,18
FE 130	130	124	12.8	1,18
FE 135	135	129	12.8	1,21
FE 135 129 19.2	135	129	19.2	1,37
FE 140	140	134	12.8	1,24
FE 145	145	139	12.8	1,30
FE 147	147	141	12.8	1,48
FE 150	150	144	12.8	1,48
FE 155	155	149	19.2	1,77
FE 160	160	154	19.2	1,95
FE 165	165	159	19.2	2,19
FE 170	170	164	19.2	2,22
FE 175	175	169	19.2	2,31
FE 180	180	174	19.2	2,31
FE 185	185	179	19.2	2,36
FE 190	190	184	19.2	2,54

46

Codice - Part No.	D ^{H8}	d ^{-0.05}	L ^{+0.25}	€uro
FE 195	195	189	19.2	2,60
FE 200	200	194	19.2	2,63
FE 205	205	199	19.2	2,68
FE 210	210	204	19.2	2,72
FE 215	215	209	19.2	2,78
FE 220	220	214	19.2	2,84
FE 225	225	219	19.2	3,07
FE 230	230	224	19.2	3,25
FE 235	235	229	19.2	3,50
FE 240	240	234	19.2	3,75
FE 245	245	239	19.2	4,05
FE 250	250	244	19.2	4,26
FE 255	255	249	19.2	4,35
FE 260	260	254	19.2	4,43
FE 265	265	259	19.2	4,55
FE 270	270	264	19.2	4,66
FE 275	275	269	19.2	4,77
FE 280	280	274	19.2	4,88
FE 285	285	279	19.2	4,89
FE 290	290	284	19.2	4,91
FE 295	295	289	19.2	4,92
FE 300	300	294	19.2	4,94

FR ANELLO GUIDA STELO E PISTONE ROD AND PISTON GUIDE RING

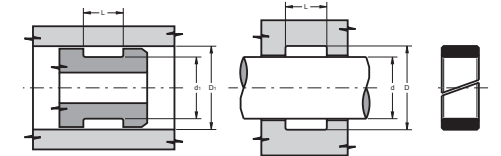


Codice - Part No.	d ₁ ^{-0.05} d ¹⁷	D ₁ ^{H8} D ^{+0.05}	L ^{+0.25}	€uro
FR 16 19.1 4	16	19.1	4.0	0,44
FR 20 25 5.6	20	25	5.6	0,47
FR 25 30 5.6	25	30	5.6	0,47
FR 25 30 9.7	25	30	9.7	0,47
FR 27 32 5.6	27	32	5.6	0,47
FR 30 35 5.6	30	35	5.6	0,47
FR 30 35 9.7	30	35	9.7	0,47



Codice - Part No.	$d_1^{-0.05} d^{f7}$	$\frac{D_1^{H8}}{D^{+0.05}}$	$L^{+0.25}$	€uro
FR 30 35 19.4	30	35	19.4	0,55
FR 35 40 4.5	35	40	4.5	0,56
FR 35 40 5.6	35	40	5.6	0,56
FR 35 40 9.7	35	40	9.7	0,56
FR 36 41 5.6	36	41	5.6	0,56
FR 40 45 5.6	40	45	5.6	0,56
FR 40 45 9.7	40	45	9.7	0,56
FR 45 50 5.6	45	50	5.6	0,56
FR 45 50 9.7	45	50	9.7	0,56
FR 45 50 19.4	45	50	19.4	0,67
FR 46 50 9.7	46	50	9.7	0,56
FR 46 50 10.2	46	50	10.2	0,66
FR 50 55 5.6	50	55	5.6	0,56
FR 50 55 9.7	50	55	9.7	0,59
FR 55 60 5.6	55	60	5.6	0,59
FR 55 60 9.7	55	60	9.7	0,59
FR 56 60 10.2	56	60	10.2	0,73
FR 57.18 62.18 19.8	57.18	62.18	19.8	0,88
FR 58 63 5.6	58	63	5.6	0,59
FR 58 63 9.7	58	63	9.7	0,59
FR 59 63 10	59	63	10.0	0,65
FR 60 65 5.6	60	65	5.6	0,62
FR 60 65 9.7	60	65	9.7	0,65
FR 60 65 19.4	60	65	19.4	0,81
FR 65 70 5.6	65	70	5.6	0,65
FR 65 70 9.7	65	70	9.7	0,65
FR 66 70 10.2	66	70	10.2	0,92
FR 67 72 5.6	67	72	5.6	0,65
FR 70 75 5.6	70	75	5.6	0,68
FR 70 75 9.7	70	75	9.7	0,68
FR 71.2 76.2 20	71.2	76.2	20.0	0,87
FR 75 80 5.6	75	80	5.6	0,68
FR 75 80 9.7	75	80	9.7	0,68
FR 75 80 19.4	75	80	19.4	0,87
FR 76 80 10	76	80	10.0	0,68
FR 80 85 5.6	80	85	5.6	0,68
FR 80 85 9.7	80	85	9.7	0,68
FR 85 90 5.6	85	90	5.6	0,71
FR 85 90 9.7	85	90	9.7	0,74
FR 88.9 93.9 19.8	88.90	93.90	19.8	0,98
FR 90 95 5.6	90	95	5.6	0,71

Codice - Part No.	$d_1^{-0.05} d^{f7}$	$\frac{D_1^{H8}}{D^{+0.05}}$	$L^{+0.25}$	€uro
FR 90 95 9.7	90	95	9.7	0,74
FR 90 95 19.4	90	95	19.4	0,98
FR 92 97 9.7	92	97	9.7	0,86
FR 95 100 5.6	95	100	5.6	0,80
FR 95 100 9.7	95	100	9.7	0,86
FR 96 100 10	96	100	10.0	0,86
FR 100 105 5.6	100	105	5.6	0,86
FR 100 105 9.7	100	105	9.7	0,86
FR 103 108 20	103	108	20.0	1,07
FR 105 110 9.7	105	110	9.7	0,92
FR 105 110 19.4	105	110	19.4	1,10
FR 110 115 9.7	110	115	9.7	0,95
FR 115 120 9.7	115	120	9.7	0,95
FR 120 125 5.6	120	125	5.6	0,92
FR 120 125 9.7	120	125	9.7	0,95
FR 122 127 9.7	122	127	9.7	0,95
FR 122 127 19.4	122	127	19.4	1,16
FR 130 135 9.7	130	135	9.7	1,06
FR 135 140 15	135	140	15.0	1,34
FR 155 160 15	155	160	15.0	1,61
FR 175 180 15	175	180	15.0	1,92
FR 176 180 25	176	180	25.0	2,00

GRF ANELLO DI GUIDA FENOLICO PHENOLIC WEAR RING

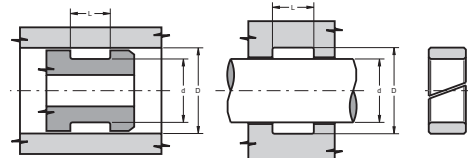

Codice - Part No.	$d_1^{H8} d^{f8}$	$\frac{D_1^{H9}}{D^{H8}}$	$L^{+0.2}$	€uro
GRF 20 25 9.7	20	25	9.7	*
GRF 25 30 9.7	25	30	9.7	*
GRF 27 32 9.7	27	32	9.7	*
GRF 30 35 9.7	30	35	9.7	*
GRF 35 40 9.7	35	40	9.7	*

47




Codice - Part No.	$d_1^{H8} d^{f8}$	$\frac{D_1^{H9}}{D^{H8}}$	$L^{+0.2}$	€uro
GRF 36 41 9.7	36	41	9.7	*
GRF 37 42 9.7	37	42	9.7	*
GRF 40 45 9.7	40	45	9.7	*
GRF 45 50 9.7	45	50	9.7	*
GRF 50 55 9.7	50	55	9.7	*
GRF 55 60 9.7	55	60	9.7	*
GRF 56 61 9.7	56	61	9.7	*
GRF 58 63 9.7	58	63	9.7	*
GRF 60 65 9.7	60	65	9.7	*
GRF 63 68 9.7	63	68	9.7	*
GRF 65 70 9.7	65	70	9.7	*
GRF 70 75 9.7	70	75	9.7	*
GRF 75 80 9.7	75	80	9.7	*
GRF 80 85 9.7	80	85	9.7	*
GRF 85 90 9.7	85	90	9.7	*
GRF 90 95 9.7	90	95	9.7	*
GRF 94 99 9.7	94	99	9.7	*
GRF 95 100 9.7	95	100	9.7	*
GRF 100 105 9.7	100	105	9.7	*
GRF 105 110 9.7	105	110	9.7	*
GRF 110 115 9.7	110	115	9.7	*
GRF 115 120 9.7	115	120	9.7	*
GRF 120 125 9.7	120	125	9.7	*
GRF 125 130 9.7	125	130	9.7	*
GRF 130 135 9.7	130	135	9.7	*
GRF 135 140 9.7	135	140	9.7	*
GRF 140 145 9.7	140	145	9.7	*
GRF 145 150 9.7	145	150	9.7	*
GRF 150 155 9.7	150	155	9.7	*
GRF 155 160 9.7	155	160	9.7	*
GRF 160 165 9.7	160	165	9.7	*
GRF 170 175 9.7	170	175	9.7	*
GRF 175 180 9.7	175	180	9.7	*
GRF 180 185 9.7	180	185	9.7	*
GRF 185 190 9.7	185	190	9.7	*
GRF 195 200 9.7	195	200	9.7	*
GRF 36 41 15	36	41	15.0	*
GRF 50 55 15	50	55	15.0	*
GRF 55 60 15	55	60	15.0	*
GRF 58 63 15	58	63	15.0	*
GRF 60 65 15	60	65	15.0	*

* a richiesta - on request

Codice - Part No.	$d_1^{H8} d^{f8}$	$\frac{D_1^{H9}}{D^{H8}}$	$L^{+0.2}$	€uro
GRF 65 70 15	65	70	15.0	*
GRF 70 75 15	70	75	15.0	*
GRF 75 80 15	75	80	15.0	*
GRF 80 85 15	80	85	15.0	*
GRF 85 90 15	85	90	15.0	*
GRF 90 95 15	90	95	15.0	*
GRF 95 100 15	95	100	15.0	*
GRF 100 105 15	100	105	15.0	*
GRF 105 110 15	105	110	15.0	*
GRF 110 115 15	110	115	15.0	*
GRF 115 120 15	115	120	15.0	*
GRF 120 125 15	120	125	15.0	*
GRF 125 130 15	125	130	15.0	*
GRF 130 135 15	130	135	15.0	*
GRF 135 140 15	135	140	15.0	*
GRF 140 145 15	140	145	15.0	*
GRF 145 150 15	145	150	15.0	*
GRF 150 155 15	150	155	15.0	*
GRF 155 160 15	155	160	15.0	*
GRF 160 165 15	160	165	15.0	*
GRF 165 170 15	165	170	15.0	*
GRF 170 175 15	170	175	15.0	*
GRF 175 180 15	175	180	15.0	*
GRF 180 185 15	180	185	15.0	*
GRF 185 190 15	185	190	15.0	*
GRF 190 195 15	190	195	15.0	*
GRF 195 200 15	195	200	15.0	*
GRF 200 205 15	200	205	15.0	*
GRF 240 245 15	240	245	15.0	*
GRF 255 260 15	255	260	15.0	*

GRB ANELLO DI GUIDA IN PTFE+BRONZO PTFE+BRONZE WEAR RING

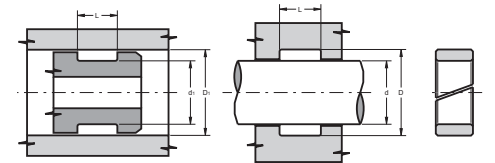

* a richiesta - on request



Codice - Part No.	d ₁ ^{HB} d ₂ ^{RB}	D ₁ ^{H9} D ₂ ^{H8}	L ^{+0.2}	€uro
GRB 15 20 6.3	15	20	6.3	*
GRB 20 25 6.3	20	25	6.3	*
GRB 25 30 6.3	25	30	6.3	*
GRB 30 35 6.3	30	35	6.3	*
GRB 35 40 6.3	35	40	6.3	*
GRB 40 45 6.3	40	45	6.3	*
GRB 45 50 6.3	45	50	6.3	*
GRB 50 55 6.3	50	55	6.3	*
GRB 55 60 6.3	55	60	6.3	*
GRB 60 65 6.3	60	65	6.3	*
GRB 65 70 6.3	65	70	6.3	*
GRB 70 75 6.3	70	75	6.3	*
GRB 75 80 6.3	75	80	6.3	*
GRB 30 35 8.1	30	35	8.1	*
GRB 35 40 8.1	35	40	8.1	*
GRB 40 45 8.1	40	45	8.1	*
GRB 45 50 8.1	45	50	8.1	*
GRB 50 55 8.1	50	55	8.1	*
GRB 55 60 8.1	55	60	8.1	*
GRB 60 65 8.1	60	65	8.1	*
GRB 65 70 8.1	65	70	8.1	*
GRB 70 75 8.1	70	75	8.1	*
GRB 75 80 8.1	75	80	8.1	*
GRB 80 85 8.1	80	85	8.1	*
GRB 85 90 8.1	85	90	8.1	*
GRB 90 95 8.1	90	95	8.1	*
GRB 95 100 8.1	95	100	8.1	*
GRB 100 105 8.1	100	105	8.1	*
GRB 105 110 8.1	105	110	8.1	*
GRB 110 115 8.1	110	115	8.1	*
GRB 115 120 8.1	115	120	8.1	*
GRB 120 125 8.1	120	125	8.1	*
GRB 125 130 8.1	125	130	8.1	*
GRB 30 35 9.7	30	35	9.7	*
GRB 35 40 9.7	35	40	9.7	*
GRB 40 45 9.7	40	45	9.7	*
GRB 45 50 9.7	45	50	9.7	*

* a richiesta - on request


Codice - Part No.	d ₁ ^{HB} d ₂ ^{RB}	D ₁ ^{H9} D ₂ ^{H8}	L ^{+0.2}	€uro
GRB 50 55 9.7	50	55	9.7	*
GRB 55 60 9.7	55	60	9.7	*
GRB 60 65 9.7	60	65	9.7	*
GRB 65 70 9.7	65	70	9.7	*
GRB 70 75 9.7	70	75	9.7	*
GRB 75 80 9.7	75	80	9.7	*
GRB 80 85 9.7	80	85	9.7	*
GRB 85 90 9.7	85	90	9.7	*
GRB 90 95 9.7	90	95	9.7	*
GRB 95 100 9.7	95	100	9.7	*
GRB 100 105 9.7	100	105	9.7	*
GRB 105 110 9.7	105	110	9.7	*
GRB 110 115 9.7	110	115	9.7	*
GRB 115 120 9.7	115	120	9.7	*
GRB 120 125 9.7	120	125	9.7	*
GRB 125 130 9.7	125	130	9.7	*
GRB 130 135 9.7	130	135	9.7	*
GRB 135 140 9.7	135	140	9.7	*
GRB 140 145 9.7	140	145	9.7	*
GRB 145 150 9.7	145	150	9.7	*
GRB 150 155 9.7	150	155	9.7	*
GRB 155 160 9.7	155	160	9.7	*
GRB 160 165 9.7	160	165	9.7	*
GRB 165 170 9.7	165	170	9.7	*
GRB 170 175 9.7	170	175	9.7	*
GRB 175 180 9.7	175	180	9.7	*
GRB 180 185 9.7	180	185	9.7	*
GRB 185 190 9.7	185	190	9.7	*
GRB 40 45 15	40	45	15.0	*
GRB 45 50 15	45	50	15.0	*
GRB 50 55 15	50	55	15.0	*
GRB 55 60 15	55	60	15.0	*
GRB 60 65 15	60	65	15.0	*
GRB 65 70 15	65	70	15.0	*
GRB 70 75 15	70	75	15.0	*
GRB 75 80 15	75	80	15.0	*
GRB 80 85 15	80	85	15.0	*
GRB 85 90 15	85	90	15.0	*

* a richiesta - on request



Codice - Part No.	d ₁ ^{HB} d ₂ ^{RB}	D ₁ ^{H9} D ₂ ^{H8}	L ^{+0.2}	€uro
GRB 90 95 15	90	95	15.0	*
GRB 95 100 15	95	100	15.0	*
GRB 100 105 15	100	105	15.0	*
GRB 105 110 15	105	110	15.0	*
GRB 110 115 15	110	115	15.0	*
GRB 115 120 15	115	120	15.0	*
GRB 120 125 15	120	125	15.0	*
GRB 125 130 15	125	130	15.0	*
GRB 130 135 15	130	135	15.0	*
GRB 135 140 15	135	140	15.0	*
GRB 140 145 15	140	145	15.0	*
GRB 145 150 15	145	150	15.0	*
GRB 150 155 15	150	155	15.0	*
GRB 155 160 15	155	160	15.0	*
GRB 160 165 15	160	165	15.0	*
GRB 165 170 15	165	170	15.0	*
GRB 170 175 15	170	175	15.0	*
GRB 175 180 15	175	180	15.0	*
GRB 180 185 15	180	185	15.0	*
GRB 185 190 15	185	190	15.0	*
GRB 190 195 15	190	195	15.0	*
GRB 195 200 15	195	200	15.0	*

MRB NASTRO GUIDA IN PTFE+BRONZO
PTFE+BRONZE GUIDE RING STRIP

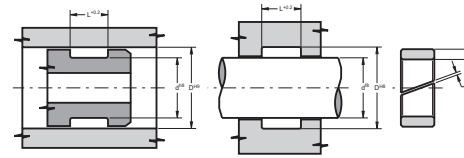

Codice - Part No.	s	L	A	€uro
MRB 15032	1.5	3.2	1.0 ÷ 1.5	*
MRB 15063	1.5	6.3	1.5 ÷ 3.5	*
MRB 15150	1.5	15.0	4.0 ÷ 8.0	*
MRB 15200	1.5	20.0	4.5 ÷ 8.0	*


* a richiesta - on request

Codice - Part No.	s	L	A	€uro
MRB 15250	1.5	25.0	6.0 ÷ 8.0	*
MRB 16025	1.6	2.5	1.0 ÷ 1.5	*
MRB 20042	2.0	4.2	1.0 ÷ 2.0	*
MRB 20053	2.0	5.3	1.0 ÷ 2.0	*
MRB 20063	2.0	6.3	1.5 ÷ 3.5	*
MRB 20081	2.0	8.1	2.0 ÷ 5.0	*
MRB 20097	2.0	9.7	2.0 ÷ 5.0	*
MRB 20125	2.0	12.5	2.0 ÷ 6.0	*
MRB 20150	2.0	15.0	4.0 ÷ 8.0	*
MRB 20200	2.0	20.0	4.5 ÷ 8.0	*
MRB 20250	2.0	25.0	6.0 ÷ 8.0	*
MRB 20300	2.0	30.0	6.0 ÷ 9.0	*
MRB 25042	2.5	4.2	1.0 ÷ 2.0	*
MRB 25056	2.5	5.6	1.0 ÷ 2.0	*
MRB 25063	2.5	6.3	1.5 ÷ 3.5	*
MRB 25081	2.5	8.1	2.0 ÷ 5.0	*
MRB 25097	2.5	9.7	2.0 ÷ 6.0	*
MRB 25100	2.5	10.0	2.0 ÷ 5.0	*
MRB 25120	2.5	12.0	2.0 ÷ 6.0	*
MRB 25125	2.5	12.5	2.0 ÷ 6.0	*
MRB 25128	2.5	12.8	2.0 ÷ 6.0	*
MRB 25150	2.5	15.0	4.0 ÷ 8.0	*
MRB 25200	2.5	20.0	4.5 ÷ 8.0	*
MRB 25250	2.5	25.0	6.0 ÷ 8.0	*
MRB 25300	2.5	30.0	6.0 ÷ 9.0	*
MRB 30097	3.0	9.7	2.0 ÷ 6.0	*
MRB 30128	3.0	12.8	2.0 ÷ 6.0	*
MRB 30150	3.0	15.0	4.0 ÷ 8.0	*
MRB 30192	3.0	19.2	4.0 ÷ 8.0	*
MRB 30200	3.0	20.0	4.5 ÷ 8.0	*
MRB 30250	3.0	25.0	6.0 ÷ 8.0	*
MRB 30300	3.0	30.0	6.0 ÷ 9.0	*
MRB 30350	3.0	35.0	6.0 ÷ 9.0	*
MRB 30400	3.0	40.0	6.0 ÷ 9.0	*
MRB 35063	3.5	6.3	1.5 ÷ 3.5	*

* a richiesta - on request




FSP ANELLO GUIDA PISTONE CON CANALI PISTON GUIDE RING WITH GROOVES

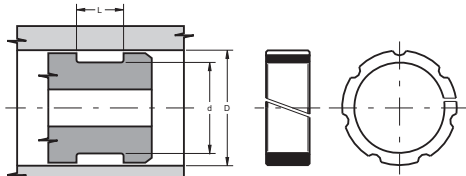

Codice - Part No.	D ^{H8}	d ^{-0,05}	L ^{+0,5}	€uro
FSP 25 16 12	25	16	13.0	0,90
FSP 30 20 12	30	20	13.0	1,15
FSP 35 25 12	35	25	13.0	1,37
FSP 40 30 12	40	30	13.0	1,51
FSP 45 35 12	45	35	13.0	1,51
FSP 50 40 15	50	40	16.0	2,15
FSP 54.5 45 19	54.5	45	20.0	2,37
FSP 55 45 15	55	45	16.0	2,33
FSP 60 45 15	60	45	16.0	2,33
FSP 60 50 15	60	50	16.0	2,71
FSP 65 55 15	65	55	16.0	2,75
FSP 75 65 15	75	65	16.0	3,22
FSP 85 75 15	85	75	16.0	3,62

OR-AP O-RING E ANELLO ANTIESTRUSIONE O-RING AND ANTIEXTRUSION RING

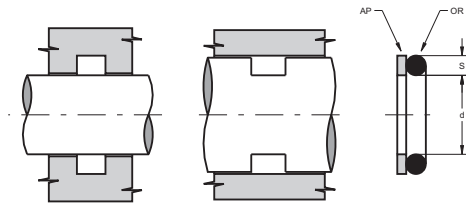

Codice - Size N.	Cod. GB	S	d	OR	AP
OR-AP	Other Ref.			€uro	€uro
004	2007	1.78	1.78	0,0613	
005	2010	1.78	2.57	0,0613	
006	2012	1.78	2.90	0,0613	
007	2015	1.78	3.68	0,0613	
008	2018	1.78	4.47	0,0613	
009	2021	1.78	5.28	0,0613	
010	2025	1.78	6.07	0,0613	0,57
610	106	1.78	6.75	0,0613	0,57
011	2031	1.78	7.65	0,0613	0,57
611	108	1.78	8.73	0,0613	
012	2037	1.78	9.25	0,0613	0,57
013	2043	1.78	10.82	0,0837	0,57
806	114	1.78	11.11	0,0837	
014	2050	1.78	12.42	0,0837	0,57
015	2056	1.78	14.00	0,0837	0,60
016	2062	1.78	15.60	0,0837	0,60
017	2068	1.78	17.17	0,1004	0,60
018	2075	1.78	18.77	0,1004	0,63
019	2081	1.78	20.35	0,1004	0,63
020	2087	1.78	21.95	0,1004	0,63
021	2093	1.78	23.52	0,1227	
022	2100	1.78	25.12	0,1227	0,66
023	2106	1.78	26.70	0,1227	0,66
024	2112	1.78	28.30	0,1283	0,66
025	2118	1.78	29.87	0,1338	
026	2125	1.78	31.47	0,1338	0,66

51



Codice - Size N.	Cod. GB	S	d	OR	AP
OR-AP	Other Ref.			€uro	€uro
027	2131	1.78	33.05	0,1394	
028	2137	1.78	34.65	0,1394	
029	2150	1.78	37.82	0,1896	0,75
030	2162	1.78	41.00	0,2008	
031	2175	1.78	44.17	0,2175	
032	2187	1.78	47.35	0,2621	0,83
033	2200	1.78	50.52	0,2621	
034	2212	1.78	53.70	0,2621	
035	2225	1.78	56.87	0,2621	
036	2237	1.78	60.05	0,2789	
037	2250	1.78	63.22	0,2956	
038	2262	1.78	66.40	0,3235	
039	2275	1.78	69.57	0,3235	
040	2287	1.78	72.75	0,3514	
041	2300	1.78	75.92	0,3569	
042	2325	1.78	82.27	0,3626	
043	2350	1.78	88.62	0,3626	
044	2375	1.78	94.97	0,4406	
045	2400	1.78	101.32	0,4406	
046	2425	1.78	107.67	0,6359	
047	2450	1.78	114.02	0,6359	
048	2475	1.78	120.37	0,7641	
049	2500	1.78	126.72	0,8869	
050	2525	1.78	133.07	0,8869	
107	-	2.62	5.23	0,0837	
108	-	2.62	6.02	0,0837	
109	-	2.62	7.60	0,0837	0,57
110	3037	2.62	9.19	0,0837	0,57
613	112	2.62	9.92	0,0837	0,57
111	3043	2.62	10.77	0,0837	0,57
614	115	2.62	11.91	0,0837	0,57
112	3050	2.62	12.37	0,0837	0,57
615	117	2.62	13.10	0,0837	
113	3056	2.62	13.94	0,0837	0,57
616	119	2.62	15.08	0,0837	0,57
114	3062	2.62	15.54	0,0837	0,60
809	121	2.62	15.88	0,1116	0,60
115	3068	2.62	17.12	0,1116	0,60

52

Codice - Size N.	Cod. GB	S	d	OR	AP
OR-AP	Other Ref.			€uro	€uro
617	123	2.62	17.86	0,1116	0,60
116	3075	2.62	18.72	0,1116	0,60
117	3081	2.62	20.29	0,1116	0,60
812	128	2.62	20.63	0,1116	0,60
118	3087	2.62	21.89	0,1116	0,60
813	130	2.62	22.22	0,1116	0,60
119	3093	2.62	23.47	0,1283	0,66
814	132	2.62	23.81	0,1283	0,66
120	3100	2.62	25.07	0,1283	0,66
121	3106	2.62	26.64	0,1283	0,69
122	3112	2.62	28.24	0,1338	0,69
123	3118	2.62	29.82	0,1338	0,69
124	3125	2.62	31.42	0,1338	0,69
125	3131	2.62	32.99	0,1338	0,75
126	3137	2.62	34.60	0,1338	0,75
127	3143	2.62	36.14	0,1506	0,75
128	3150	2.62	37.77	0,1506	0,75
129	3156	2.62	39.34	0,1506	0,75
130	3162	2.62	40.95	0,1840	0,75
131	3168	2.62	42.52	0,1840	0,75
132	3175	2.62	44.12	0,1840	0,75
133	3181	2.62	45.69	0,1953	0,83
134	3187	2.62	47.30	0,1953	0,83
135	3193	2.62	48.90	0,2120	0,83
136	3200	2.62	50.47	0,2120	0,83
137	3206	2.62	52.07	0,2510	0,83
138	3212	2.62	53.65	0,2510	0,83
139	3218	2.62	55.25	0,2510	0,83
140	3225	2.62	56.82	0,2510	0,83
141	3231	2.62	58.42	0,2510	0,92
142	3237	2.62	60.00	0,2733	0,92
143	3243	2.62	61.60	0,2733	0,92
144	3250	2.62	63.17	0,2845	0,92
145	3256	2.62	64.77	0,2845	0,92
146	3262	2.62	66.35	0,3235	0,92
147	3268	2.62	67.95	0,3235	0,92
148	3275	2.62	69.52	0,3235	0,92
149	3281	2.62	71.12	0,3235	0,92
150	3287	2.62	72.69	0,3626	1,06



Codice - Size N.	Cod. GB	S	d	OR	AP
OR-AP	Other Ref.			€uro	€uro
151	3300	2.62	75.87	0,3626	1,12
152	3325	2.62	82.22	0,4072	1,15
153	3350	2.62	88.57	0,4406	1,25
154	3375	2.62	94.92	0,4852	1,28
155	3400	2.62	101.27	0,6135	
156	3425	2.62	107.62	0,7641	
157	3450	2.62	113.97	0,7641	1,78
158	3475	2.62	120.33	0,8256	
159	3500	2.62	126.67	0,8702	
160	3525	2.62	133.00	1,0040	
161	3550	2.62	139.38	1,0040	
162	3575	2.62	145.72	1,1434	
163	3600	2.62	152.07	1,2160	
164	3625	2.62	158.43	1,3833	
165	3650	2.62	164.78	1,4502	
166	3675	2.62	171.13	1,5227	
167	3700	2.62	177.48	1,5227	
168	3725	2.62	183.83	1,7626	
169	3750	2.62	190.18	1,7626	
170	3775	2.62	196.53	1,7626	
171	3800	2.62	202.88	1,7626	
172	3825	2.62	209.23	1,9020	
173	3850	2.62	215.58	1,9020	
174	3875	2.62	221.93	2,0694	
175	3900	2.62	228.28	2,0694	
204	4036	3.53	9.12	0,1004	
205	4042	3.53	10.69	0,1004	
206	4050	3.53	12.29	0,1004	
207	4055	3.53	13.87	0,1004	
208	4061	3.53	15.47	0,1004	
209	4067	3.53	17.04	0,1004	
210	4075	3.53	18.64	0,1004	0,66
211	4081	3.53	20.22	0,1004	0,66
212	4087	3.53	21.82	0,1004	0,66
213	4093	3.53	23.40	0,1283	0,66
214	4100	3.53	24.99	0,1283	0,66
618	134	3.53	25.80	0,1283	0,66
215	4106	3.53	26.58	0,1283	0,66

Codice - Size N.	Cod. GB	S	d	OR	AP
OR-AP	Other Ref.			€uro	€uro
216	4112	3.53	28.17	0,1338	0,66
217	4118	3.53	29.75	0,1338	0,75
218	4125	3.53	31.34	0,1338	0,75
219	4131	3.53	32.92	0,1506	0,75
220	4137	3.53	34.52	0,1506	0,75
221	4143	3.53	36.09	0,1506	0,75
222	4150	3.53	37.69	0,1840	0,75
824	144	3.53	39.69	0,1840	0,75
223	4162	3.53	40.87	0,1840	0,75
825	146	3.53	41.28	0,1840	0,75
826	147	3.53	42.86	0,1896	0,83
224	4175	3.53	44.04	0,2120	0,83
827	149	3.53	44.45	0,2120	0,83
828	150	3.53	46.04	0,2120	0,83
225	4187	3.53	47.22	0,2120	0,83
829	152	3.53	47.63	0,2120	0,83
830	153	3.53	49.21	0,2120	0,83
226	4200	3.53	50.39	0,2120	0,92
831	155	3.53	50.80	0,2120	0,92
832	156	3.53	52.39	0,2120	0,92
227	4212	3.53	53.57	0,2120	0,92
833	158	3.53	53.98	0,2231	0,92
834	159	3.53	55.56	0,2733	0,98
228	4225	3.53	56.74	0,2733	0,98
835	161	3.53	57.15	0,2733	0,98
836	162	3.53	58.74	0,2845	0,98
229	4237	3.53	59.92	0,2845	0,98
837	164	3.53	60.33	0,2845	0,98
838	165	3.53	61.91	0,2845	0,98
230	4250	3.53	63.09	0,2845	0,98
839	167	3.53	63.50	0,2845	0,98
840	168	3.53	65.09	0,3012	0,98
231	4262	3.53	66.27	0,3012	0,98
841	170	3.53	66.68	0,3012	0,98
842	171	3.53	68.26	0,3347	1,03
232	4275	3.53	69.44	0,3347	1,03
843	173	3.53	69.85	0,3347	1,03
844	174	3.53	71.44	0,3458	1,03
233	4287	3.53	72.62	0,3458	1,03



Codice - Size N.	Cod. GB	S	d	OR	AP
OR-AP	Other Ref.			€uro	€uro
845	176	3.53	73.03	0,3458	1,03
846	177	3.53	74.61	0,3458	1,03
234	4300	3.53	75.79	0,3458	1,09
235	4312	3.53	78.97	0,3626	1,09
236	4325	3.53	82.14	0,4295	1,09
237	4337	3.53	85.32	0,4295	1,09
238	4350	3.53	88.49	0,4295	1,15
239	4362	3.53	91.67	0,4964	1,15
240	4375	3.53	94.84	0,4964	1,15
241	4387	3.53	98.02	0,4964	1,15
242	4400	3.53	101.19	0,5801	1,26
243	4412	3.53	104.37	0,6135	1,26
244	4425	3.53	107.54	0,6135	1,26
245	4437	3.53	110.72	0,6135	1,26
246	4450	3.53	113.89	0,6470	1,38
247	4462	3.53	117.07	0,6860	1,38
248	4475	3.53	120.24	0,7641	1,38
249	4487	3.53	123.42	0,7641	1,38
250	4500	3.53	126.59	0,7641	1,49
251	4512	3.53	129.77	0,8702	1,49
252	4525	3.53	132.94	0,8702	1,49
253	4537	3.53	136.12	0,9370	1,49
254	4550	3.53	139.29	0,9370	1,49
255	4562	3.53	142.47	1,0040	1,67
256	4575	3.53	145.64	1,0040	1,67
257	4587	3.53	148.82	1,0765	1,67
258	4600	3.53	151.99	1,0765	1,72
259	4625	3.53	158.34	1,0765	
260	4650	3.53	164.69	1,1434	
261	4675	3.53	171.04	1,3108	
262	4700	3.53	177.39	1,3833	
263	4725	3.53	183.74	1,3833	
264	4750	3.53	190.09	1,5227	2,31
265	4775	3.53	196.44	1,5227	
266	4800	3.53	202.79	1,5227	
267	4825	3.53	209.14	1,9020	
268	4850	3.53	215.49	1,9020	
269	4875	3.53	221.84	2,0024	
270	4900	3.53	228.19	2,0024	

Codice - Size N.	Cod. GB	S	d	OR	AP
OR-AP	Other Ref.			€uro	€uro
271	4925	3.53	234.54	2,1419	
272	4950	3.53	240.89	2,1419	
273	4975	3.53	247.24	2,1419	
274	41000	3.53	253.59	2,2813	
275	41050	3.53	266.29	4,5514	
276	41100	3.53	278.99	4,8303	
277	41150	3.53	291.69	4,9642	
278	41200	3.53	304.39	4,9642	
279	41300	3.53	329.79	5,1706	
280	41400	3.53	355.19	5,1706	
281	41500	3.53	380.59	5,3100	
282	41600	3.53	405.26	7,0400	
283	41700	3.53	430.66	7,5030	
318	-	5.34	24.77	0,2450	
319	-	5.34	26.34	0,2450	
320	-	5.34	27.97	0,2450	
321	-	5.34	29.52	0,2450	
322	-	5.34	31.12	0,2450	
323	-	5.34	32.69	0,2450	
324	-	5.34	34.29	0,2566	
325	6150	5.34	37.47	0,2566	1,03
326	6162	5.34	40.65	0,2566	1,03
327	6175	5.34	43.82	0,2733	1,03
328	6187	5.34	47.00	0,2733	1,03
329	6200	5.34	50.16	0,3235	1,03
330	6212	5.34	53.34	0,3235	1,03
331	6225	5.34	56.52	0,3514	1,03
332	6237	5.34	59.69	0,3514	1,03
333	6250	5.34	62.87	0,4239	1,09
334	6262	5.34	66.04	0,4239	1,09
335	6275	5.34	69.22	0,4406	1,09
336	6287	5.34	72.39	0,4741	1,09
619	178	5.34	74.63	0,4741	1,15
337	6300	5.34	75.57	0,4852	1,15
338	6312	5.34	78.74	0,4964	1,15
620	181	5.34	79.77	0,4964	1,15
339	6325	5.34	81.92	0,5633	1,32
340	6337	5.34	85.09	0,5801	1,32



Codice - Size N.	Cod. GB	S	d	OR	AP
OR-AP	Other Ref.			€uro	€uro
341	6350	5.34	88.27	0,6135	1,32
621	185	5.34	89.69	0,6135	1,32
342	6362	5.34	91.44	0,6135	1,44
343	6375	5.34	94.62	0,6135	1,44
344	6387	5.34	97.79	0,7307	1,44
622	189	5.34	100.00	0,7307	1,44
345	6400	5.34	100.97	0,7307	1,61
346	6412	5.34	104.14	0,7307	1,61
347	6425	5.34	107.32	0,7641	1,61
623	193	5.34	109.50	0,7641	1,72
348	6437	5.34	110.50	0,7641	1,72
349	6450	5.34	113.67	0,7641	1,84
350	-	5.34	116.84	0,8980	1,84
860	199	5.34	117.50	0,8980	1,84
351	-	5.34	120.02	0,8980	2,07
861	201	5.34	120.70	0,8980	2,07
352	-	5.34	123.20	0,8980	
862	203	5.34	123.80	0,8980	2,07
353	-	5.34	126.37	1,0040	2,07
863	206	5.34	127.00	1,0040	2,07
354	-	5.34	129.54	1,0040	2,07
864	208	5.34	130.20	1,0040	2,07
355	-	5.34	132.72	1,0765	
865	210	5.34	133.40	1,0765	2,18
356	-	5.34	135.90	1,0765	2,18
866	213	5.34	136.50	1,0765	2,18
357	-	5.34	139.07	1,1044	2,18
867	215	5.34	139.70	1,3108	2,18
358	-	5.34	142.24	1,3108	2,18
868	217	5.34	142.90	1,3108	2,18
359	-	5.34	145.42	1,4502	
869	219	5.34	146.10	1,4502	
360	-	5.34	148.60	1,4502	2,33
870	221	5.34	149.20	1,4502	2,33
361	6600	5.34	151.77	1,5227	2,40
362	6625	5.34	158.12	1,6231	2,47
363	6645	5.34	164.47	1,6956	2,76
364	6670	5.34	170.82	1,6956	2,87
365	6700	5.34	177.17	1,9020	2,96


Codice - Size N.	Cod. GB	S	d	OR	AP
OR-AP	Other Ref.			€uro	€uro
366	6720	5.34	183.52	1,9020	
367	6745	5.34	189.87	2,1419	3,42
368	6775	5.34	196.22	2,2813	
369	6795	5.34	202.57	2,2813	
370	6820	5.34	208.92	2,2813	3,71
371	6850	5.34	215.27	2,3817	
372	6870	5.34	221.62	2,3817	
373	6895	5.34	227.97	2,3817	
374	6920	5.34	234.32	2,3817	
375	6945	5.34	240.67	2,4542	
376	6975	5.34	247.02	2,5212	
377	6995	5.34	253.37	2,5212	
378	61050	5.34	266.07	5,0311	
379	61100	5.34	278.77	5,3100	
380	61150	5.34	291.47	5,3769	
381	61200	5.34	304.17	5,5108	
382	61300	5.34	329.57	5,6559	
383	61400	5.34	354.97	5,7227	
384	61500	5.34	380.37	6,0686	
385	61600	5.34	405.26	6,2749	
386	61700	5.34	430.66	6,4758	
387	61800	5.34	456.06	6,8271	
388	61900	5.34	481.40	7,1005	
389	62000	5.34	506.80	7,2399	
390	62100	5.34	532.20	7,5801	
391	-	5.34	557.60	8,3387	
392	-	5.34	582.68	9,0973	
393	-	5.34	608.08	9,8335	
394	-	5.34	633.48	10,6145	
395	-	5.34	658.88	11,3786	
425	8450	6.99	113.67	1,0765	2,27
624	197	6.99	114.70	1,0765	
426	8462	6.99	116.84	1,0765	2,27
427	8475	6.99	120.02	1,0765	
428	8487	6.99	123.20	1,1434	2,41
625	204	6.99	124.60	1,1434	
429	8500	6.99	126.37	1,2438	2,41
430	8512	6.99	129.54	1,2438	



Codice - Size N.	Cod. GB	S	d	OR	AP
OR-AP	Other Ref.			€uro	€uro
431	8525	6.99	132.72	1,3833	2,61
626	211	6.99	134.50	1,3833	
432	8537	6.99	135.90	1,3833	2,61
433	8550	6.99	139.07	1,3833	2,61
434	8562	6.99	142.24	1,5227	
435	8575	6.99	145.42	1,5227	2,76
436	8587	6.99	148.60	1,6231	
437	8600	6.99	151.77	1,6231	
872	223	6.99	155.60	1,6956	2,87
438	8625	6.99	158.12	1,6956	
627	225	6.99	159.50	1,6956	
874	226	6.99	161.90	1,6956	
439	8650	6.99	164.47	1,6956	
628	228	6.99	166.70	1,6956	3,02
876	229	6.99	168.30	1,6956	
440	8675	6.99	170.82	1,6956	
878	231	6.99	174.60	1,9020	
441	8700	6.99	177.17	1,9020	
880	233	6.99	181.00	1,9020	
442	8725	6.99	183.52	1,9020	3,42
882	235	6.99	187.30	2,0694	
443	8750	6.99	189.87	2,0694	3,42
884	237	6.99	193.70	2,0694	
444	8775	6.99	196.22	2,0694	3,79
886	239	6.99	200.00	2,0694	
445	8800	6.99	202.57	2,2813	
674	8825	6.99	208.92	2,2813	
446	8850	6.99	215.27	2,2813	
676	8875	6.99	221.62	2,2813	
447	8900	6.99	227.97	2,4542	
678	8925	6.99	234.32	2,4542	
448	8950	6.99	240.67	2,5212	
680	8975	6.99	247.00	2,5936	
449	81000	6.99	253.30	2,7610	
682	81025	6.99	259.70	2,7610	
450	81050	6.99	266.07	2,9004	
684	81075	6.99	272.40	3,2797	
451	81100	6.99	278.77	3,2797	
686	81125	6.99	285.10	3,7929	

Codice - Size N.	Cod. GB	S	d	OR	AP
OR-AP	Other Ref.			€uro	€uro
452	81150	6.99	291.47	4,8303	
688	81175	6.99	297.80	4,8303	
453	81200	6.99	304.17	5,1706	
454	81250	6.99	316.87	5,7227	
455	81300	6.99	329.57	5,9291	
456	81350	6.99	342.27	5,9291	
457	81400	6.99	354.97	6,0686	
458	81450	6.99	367.67	6,4758	
459	81500	6.99	380.37	6,6877	
460	81550	6.99	393.07	7,2399	
461	81600	6.99	405.26	7,5801	
462	81650	6.99	417.96	8,3387	
463	81700	6.99	430.66	8,7571	
464	81750	6.99	443.36	9,0973	
465	81800	6.99	456.06	9,5157	
466	81850	6.99	468.76	9,8559	
467	81900	6.99	481.46	10,6145	
468	81950	6.99	494.16	11,3786	
469	82000	6.99	506.86	12,1315	
470	82100	6.99	532.26	12,8901	
471	82200	6.99	557.66	13,6487	
472	82300	6.99	582.68	14,7531	


AM ANELLO ANTIESTRUSIONE SERIE METRICA ANTIEXTRUSION RING METRIC SERIES

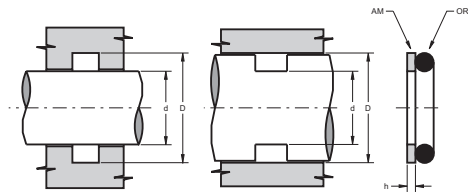

Codice - Part No.	d	D	h	€uro
AM 3.8 6.5 1	3.8	6.5	1.0	0,37
AM 6 10.5 0.8	6	10.5	0.8	0,37
AM 10 14 1.3	10	14	1.3	0,37
AM 12 16 1.3	12	16	1.3	0,37
AM 16 20 1.3	16	20	1.3	0,37
AM 20 25 1.3	20	25	1.3	0,43
AM 25 30 1.3	25	30	1.3	0,46
AM 30 35 1.3	30	35	1.3	0,49
AM 35 40 1.3	35	40	1.3	0,52
AM 36 41 1.75	36	41	1.75	0,53
AM 40 45 1.3	40	45	1.3	0,55
AM 45 50 1.3	45	50	1.3	0,57
AM 50 55 1.3	50	55	1.3	0,60
AM 50 60 1.7	50	60	1.7	0,69
AM 54 59 1.4	54	59	1.4	0,63
AM 55 60 1.3	55	60	1.3	0,63
AM 56.5 61 1.4	56.5	61	1.4	0,66
AM 58 63 1.3	58	63	1.3	0,66
AM 60 65 1.3	60	65	1.3	0,69
AM 60 67 1.5	60	67	1.5	0,73
AM 60 70 1.7	60	70	1.7	0,78
AM 65 70 1.3	65	70	1.3	0,72
AM 65 75 1.7	65	75	1.7	0,83
AM 66 71 1.5	66	71	1.5	0,83
AM 70 75 1.3	70	75	1.3	0,75
AM 70 77 1.5	70	77	1.5	0,80
AM 70 80 1.7	70	80	1.7	0,89
AM 74 80 1.5	74	80	1.5	0,78

Codice - Part No.	d	D	h	€uro
AM 74.1 81 1.5	74.1	81	1.5	0,78
AM 75 80 1.3	75	80	1.3	0,78
AM 75 85 1.7	75	85	1.7	0,92
AM 80 85 1.3	80	85	1.3	0,89
AM 80 87 1.5	80	87	1.5	0,95
AM 80 90 1.7	80	90	1.7	1,01
AM 83 90 1.5	83	90	1.5	0,89
AM 85 90 1.3	85	90	1.3	0,89
AM 85 95 1.7	85	95	1.7	1,03
AM 89.4 100 2.5	89.4	100	2.5	1,55
AM 90 95 1.3	90	95	1.3	0,92
AM 90 100 1.7	90	100	1.7	1,06
AM 94.5 101 1.5	94.5	101	1.5	0,98
AM 95 100 1.3	95	100	1.3	0,98
AM 95 105 1.7	95	105	1.7	1,09
AM 100 105 1.3	100	105	1.3	1,03
AM 100 110 1.7	100	110	1.7	1,15
AM 105 110 1.3	105	110	1.3	1,06
AM 105 115 1.7	105	115	1.7	1,24
AM 110 115 1.3	110	115	1.3	1,09
AM 110 120 1.7	110	120	1.7	1,29
AM 115 120 1.3	115	120	1.3	1,15
AM 115 125 1.7	115	125	1.7	1,32
AM 120 125 1.3	120	125	1.3	1,26
AM 120 130 1.7	120	130	1.7	1,38
AM 125 130 1.3	125	130	1.3	1,32
AM 125 135 1.7	125	135	1.7	1,44
AM 130 140 1.7	130	140	1.7	1,47
AM 135 145 1.7	135	145	1.7	1,55
AM 140 150 1.7	140	150	1.7	1,67
AM 142 151 1.8	142	151	1.8	1,69
AM 145 155 1.7	145	155	1.7	1,72
AM 150 160 1.7	150	160	1.7	1,78
AM 152 161 1.8	152	161	1.8	1,84

PFS TENUTA PER FLANGIA SAE SEAL FOR SAE FLANGE

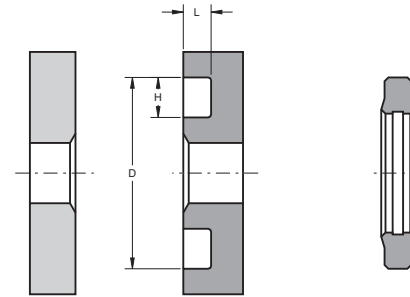


Codice - Part No.	D ^{+0.1}	H ^{+0.25}	L ^{+0.07}	€uro
PFS 12.2 19.2 2.2	19.2	3.5	2.20	0,66
PFS 15.4 22.4 2.2	22.4	3.5	2.20	0,66

Misure in pollici - Inch sizes

PFS	D	H	L	€uro
PFS 1/2"	25.4	4.2	2.85	0,69
PFS 3/4"	31.8	4.2	2.85	0,73
PFS 1"	39.6	4.2	2.85	0,89
PFS 1 1/4"	44.5	4.2	2.85	0,95
PFS 1 1/2"	53.7	4.2	2.85	1,18
PFS 2"	63.4	4.2	2.85	1,30

DV TENUTA FRONTALE V - RING

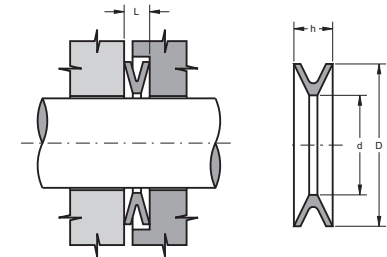

Codice - Part No.	D	d	h	L	€uro
DV 27.5	27.5	22.5	4.0	2.0	1,48
DV 32	32.0	26.0	4.0	2.0	1,48
DV 38.5	38.5	31.0	4.5	2.0	1,77
DV 43	43.0	36.0	5.0	2.0	1,95
DV 51	51.0	42.0	6.0	2.5	2,22
DV 57.5	57.5	47.5	7.0	3.0	2,36
DV 64	64.0	54.0	7.0	3.5	2,51
DV 71	71.0	59.0	7.0	3.5	2,69
DV 80	80.0	65.0	7.0	3.5	2,78
DV 86	86.0	71.0	9.0	4.0	2,96
DV 86/A	86.0	70.0	9.0	4.0	2,96
DV 88.8	88.8	70.0	8.0	3.5	2,96
DV 100	100.0	82.0	9.0	4.5	3,52
DV 105	105.0	90.0	9.0	4.5	3,64
DV 162	162.0	137.0	15.0	7.5	7,54
DV 186	186.0	160.0	16.0	7.5	8,57

